



GENERAL CATALOG

2023 | 2024

CENTRIFUGES
INCUBATORS



Hettich



DEAR PARTNER,

In this issue, we look back on the 120-year success story of our company. What began in 1904 as a small metalware factory is today a future-oriented, internationally active family-run business that's long been making its mark in the world of medical technology. One thing has never changed, though: our dedicated focus on our customers and our motivation to improve people's lives. Yet, a look ahead to the future reveals some challenges that need rethinking. Automation is progressing, systems aided by robotics and artificial intelligence are advancing and helping laboratories to work more quickly and efficiently. We're ready to meet these challenges and are proud to contribute to such advancement.

Besides guaranteeing reliable and safe products, the pioneering expansions to our portfolio are also important. In this issue, we introduce you to our new HettCube incubators in 60 and 120 liter sizes as well as the SBS 300 Robotic – a robotic centrifuge specially developed for microtiter plates that deftly supplements our portfolio.

You'll find these and other innovations presented in the following pages. And they all come with our 24-month performance guarantee and 10-year spare parts warranty.

We wish you enjoyable browsing through our new catalog and every success working with centrifuges and incubators from Hettich.

Sincerely,

Kristina Apollinaris Eberle
CEO

Sincerely,

Klaus-Günter Eberle
CEO

OVER
120
YEARS
TRADITION
& QUALITY

GOOD IDEAS FOR EVEN MORE EFFICIENCY: NEW PRODUCTS FROM HETTICH IN 2023.

NEW HETTCUBE SIZES EXPAND THE VERSATILITY OF LABORATORIES

More compact, just as efficient: The HettCube incubators from HETTICH are renowned for their large usable space within a small footprint. Where space is limited or samples require personal observation, our new HettCubes, with internal volumes of 60 and 120 liters, are the ideal, high-quality solution.

Both models are available with a natural or forced convection and ensure uniform temperature distribution. The user-friendly 4.3-inch touchscreen offers a neatly arranged dashboard displaying the most important parameters. All generated data, including the event logging and logbook, are available for download via the USB port or LAN connection. The interior structure and inserts are of high-quality stainless steel and thus easy to clean. A door-locking mechanism and sealable Ø 30 mm access port bushing come standard.

Good cost-performance ratio: a slimmer design and reduced number of options make the HettCube 60 and HETTCUBE 120 particularly attractive without compromising on quality. Learn more on page 197.



— page 197



SBS 300 ROBOTIC – AUTOMATED CENTRIFUGATION OF MICROTITER PLATES

HETTICH has pioneered innovations in laboratory automation for over 25 years. We know the market and its requirements offering a broad portfolio of products and services that feature intelligent, reliable, and customized solutions.

Our new SBS 300 ROBOTIC offers an innovative front-loading centrifuge specially developed for automated processing of microtiter plates. It's well-suited for virtually all laboratory robotic systems and can be easily integrated into existing settings thanks to its slim, modular design.

Follow the QR code and learn more about the SBS 300 Robotic and other automation solutions from HETTICH.



NEW MEDICAL PRODUCT REQUIREMENTS IN ACCORDANCE WITH MDR / IVDR

The new EU Regulations governing medical devices – the Medical Device Regulation (MDR) and In Vitro Diagnostic Medical Devices Regulation (IVDR) – supersede the pertinent directives and guidelines applicable to date ensuring greater transparency and traceability, thereby enhancing patient safety. As a manufacturer of medical devices, timely and diligent compliance with all regulations takes top priority at HETTICH. Our quality management systems and all of our medical devices are already (re) certified. All HETTICH products are marked accordingly with an appropriate seal of approval to distinguish them.



according to regulation (EU) 2017/746

CONTACT

— RESPONSIBILITY FOR YEARS

To get help selecting the perfect choice of equipment, sales support or any general inquiry, please contact our Global Customer Service Team.

Select your direct contact person by area or search our contact directory on www.hettichlab.com/contact



— YOUR CONTACT OPTIONS BY AREA

EUROPE, UK,
BALKANS

✉ sales1@hettichlab.com ☎ + 49 7461 705 1402

RUSSIA, UKRAINE,
BELARUS, POLAND

✉ sales1@hettichlab.com ☎ + 49 7461 705 1402

AFRICA

✉ sales2@hettichlab.com ☎ + 49 7461 705 1403

MIDDLE EAST

✉ sales2@hettichlab.com ☎ + 49 7461 705 1403

INDIA, PAKISTAN

✉ sales3@hettichlab.com ☎ + 49 7461 705 1404

ASIA-PACIFIC

✉ sales3@hettichlab.com ☎ + 49 7461 705 1404

NORTH- / SOUTH
AMERICA

✉ sales3@hettichlab.com ☎ + 49 7461 705 1404

SERVICE

— 5 GOOD REASONS TO CHOOSE HETTICH SERVICE

- 1** Short response time thanks to our 48-hour response promise.*
- 2** Our technical specialists are always available for one-to-one communication. No more waiting on a hotline or in a call-center.
- 3** Localized consulting and qualification.
- 4** Preventive maintenance contracts available.*
- 5** Parts and service are available for 10 years, even after a specific model has been discontinued.

Our global network of Hettich subsidiaries and authorized service providers ensure that customer challenges are addressed quickly and efficiently with real-time solutions.

In addition to our German headquarters we have branch offices in throughout Europe as well as the USA (North America) and Singapore (ASEAN) to offer fast, local support. You can find an overview of an authorized service provider for your country on our Website: www.hettichlab.com/contact

You can reach us through the following email address:



service@hettichlab.com

*) Not available in all countries.



| | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  | NEW  |  |  |  | | |
| MANUAL CENTRIFUGE | EBA 200 200 S | EBA 200 (MD) | EBA 270 | EBA 280 280 S | HAEMATOKRIT 200 | | |
|  |  |  |  |  | | | |
| MIKRO 185 | MIKRO 200 | MIKRO 200 R | MIKRO 220 | MIKRO 220 R | | | |
|  | NEW  |  |  |  |  |  |  |
| ROTOFIX 32 A | ROTOFIX 32 A (MD) | UNIVERSAL 320 | UNIVERSAL 320 R | ROTINA 380 | ROTINA 380 R | ROTINA 420 | ROTINA 420 R |
|  |  |  |  | | | | |
| ROTANTA 460 RC | ROTANTA 460 RF | ROTIXA 500 RS | ROTO SILENTA 630 RS | | | | |
|  | | | | | | | |
| ROTOLAVIT II | | | | | | | |
|  | | | | | | | |
| ZENTRIMIX 380 R | | | | | | | |
|  | NEW  |  |  | | | | |
| MIKRO 220 ROBOTIC | SBS 300 ROBOTIC | ROTINA 380 380 R 380 RC ROBOTIC | ROTANTA 460 ROBOTIC | | | | |
|  |  |  | | | | | |
| CYTO SYSTEMS | ROLLING CABINET | BLOOD BANK ACCESSORIES | | | | | |
| NEW  | NEW  |  |  |  |  |  |  |
| HETTCUBE 60 | HETTCUBE 120 | HETTCUBE 200 | HETTCUBE 200 R | HETTCUBE 400 | HETTCUBE 400 R | HETTCUBE 600 | HETTCUBE 600 R |
|  |  |  | | | | | |
| PLANT GROWTH CABINETS | STABILITY TEST CABINETS | STABILITY TEST CABINETS | | | | | |

CONTENTS

SMALL CENTRIFUGES

ON PAGE 8

MICROLITER CENTRIFUGES

ON PAGE 32



ROTANTA 460



ROTANTA 460 R



ROTOFIX 46 | 46 H

BENCHTOP CENTRIFUGES

ON PAGE 52

FLOORSTANDING CENTRIFUGES

ON PAGE 136

WASH CENTRIFUGE

ON PAGE 164

DUAL CENTRIFUGE

ON PAGE 170

AUTOMATED CENTRIFUGES

ON PAGE 176

EQUIPMENT

ON PAGE 178

INCUBATORS

ON PAGE 186

ENVIRONMENTAL CABINETS

ON PAGE 200

CONTROL PANELS | CAPACITIES | FEATURES | MODEL VARIANTS
CERTIFICATES / REGISTRATIONS | CATALOG EXPLANATION

SMALL CENTRIFUGES

Benchtop performance in a compact footprint



MANUAL CENTRIFUGE
on page 10



EBA 200 | 200 S
on page 12




EBA 270
on page 18

01



EBA 280 | 280 S
on page 22

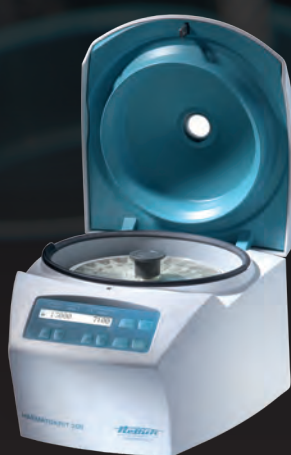

HAEMATOKRIT 200
on page 30

MANUAL CENTRIFUGE

Operate independently anywhere

The adaptable manual centrifuge can be simply clamped to any benchtop, with no need for electricity. Its self-lubricating drive system makes it virtually maintenance-free.

— FEATURES

- Max. RPM: 3,000 min⁻¹
- Max. RCF: 1,298
- Max. capacity: 4 x 15 ml
- Maintenance-free due to its self-lubricating drive system
- Clamping device for simple table mounting
- Choice of 2 rotors

— FIELDS OF APPLICATION

- Field Testing
- Aid Organizations
- Pharmacies



TECHNICAL DATA

| | MANUAL CENTRIFUGE without rotor | Swing-out rotor, 4-place | Swing-out rotor, 4-place |
|--------------------|------------------------------------|-----------------------------|-----------------------------|
| angle | - | 90° | 50° |
| max. capacity | - | 4 x 15 ml (conical only) | 4 x 15 ml |
| max. RPM | - | 3,000 min ⁻¹ | 3,000 min ⁻¹ |
| max. RCF | - | 1,298 | 1,077 |
| dimensions (WxDxH) | 140 x 175 x 285 mm | - | - |
| weight | approx. 0.9 kg | - | - |
| Cat. No. | 1011 | 1014 | 1025 |



EBA 200 | 200 S

Top performance for small laboratories

The EBA 200 and EBA 200 S are practical, compact centrifuges for small sample sizes. The high speed S model can deliver reliable results in 3 minutes or less. An 8-place fixed angle rotor is included to hold standard blood and urine tubes up to 15 ml in capacity.

— FEATURES

- Max. RPM: 200 - 6,000 min⁻¹ | 8,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 3,461 | 6,153
- Max. capacity: 8 x 15 ml
- Small centrifuge including 8-place angle rotor
- Compact design
- IVDR-conform according to regulation (EU) 2017/746
- Maximum noise level of ≤ 50 dB(A) (EBA 200)
- Impulse key for short cycle mode
- 1 acceleration and 2 deceleration stages
- Easy operation with keypad

— FIELDS OF APPLICATION

- Physician's Office Laboratory (POL)
- Small laboratories
- Off-site draw locations



Centrifuge packages for the model can be found on [page 15](#)



More information about the control panel can be found on [page 202](#)



according to regulation (EU) 2017/746




TECHNICAL DATA

| | EBA 200 | EBA 200 S |
|----------------------------|---|---|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 – 60 Hz |
| consumption | 100 VA | 160 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 8 x 15 ml | 8 x 15 ml |
| max. RPM | 6,000 min ⁻¹ | 8,000 min ⁻¹ |
| max. RCF | 3,461 | 6,153 |
| running time | 1 – 99 min, ∞ continuous run, short cycle mode (impulse button) | 1 – 99 min, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 261 x 353 x 228 mm | 261 x 353 x 228 mm |
| weight | approx. 9 kg | approx. 11 kg |
| max. noise level | ≤ 50 dB (A) | ≤ 55 dB (A) |
| Cat. No. | 1800 | 1802 |
| 100 – 127 V 1 ~ / 50–60 Hz | 1800-01 | 1802-01 |
| emission, immunity | FCC class B | FCC class B |

*) Other voltages on request.

AVAILABLE ROTORS

| ANGLE ROTORS | angle | max. RPM | max. capacity | Cat. No | page |
|--|-------|---|---------------|------------------|------|
|  angle rotor, 8-place | 33° | 6,000 min ⁻¹ 8,000 min ⁻¹ | 8 x 15 ml | INCLUSIVE | 14 |

— ANGLE ROTOR, 8-PLACE



Rotor

| | | |
|----------------------------------|------------------|---|
| max. RPM | EBA 200 200 S | 6,000 min ⁻¹ 8,000 min ⁻¹ |
| max. RCF | | 3,461 6,153 |
| max. capacity | | 8 x 15 ml |
| run up / run down, braked in sec | | 17 / 12 37 / 17 |
| angle | | 33° |
| Cat. No. | INCLUSIVE | |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|------------------|-------------------------|---------|---------|---------------------------|---------|----------|---------------------------------------|---------|---------|---------|---------|---------|---------|----------|
| | | | | | | | | | | | | | | | |
| capacity in ml | 0.5 | 1.5 | 2 | 4 | 5 | 6 | 15 | 1.1-1.4 | 2.6-3.4 | 2.7-3 | 4.5-5 | 4.9 | 7.5-8.2 | 9-10 | 15 |
| Ø x L in mm | 10.7 x 46 | 11 x 38 | 11 x 38 | 12 x 60 | 13 x 75 | 12 x 82 | 17 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 17 x 120 |
| max. RCF ²⁾ | EBA 200 | 2,214 | 2,173 | 2,173 | 2,656 | 2,697 | 3,461 | 2,697 | 2,697 | 2,697 | 3,461 | 3,461 | 3,461 | 3,461 | 3,461 |
| max. RCF ²⁾ | EBA 200 S | 3,935 | 3,864 | 3,864 | 5,009 | 4,794 | 4,794 | 4,794 | 4,794 | 4,794 | 6,153 | 6,153 | 6,153 | 6,153 | 6,153 |
| radius in mm | 55 | 54 | 54 | 66 | 67 | 67 | 86 | 67 | 67 | 67 | 86 | 86 | 86 | 86 | 86 |
| Cat. No. | Pediatric | microliter tubes | | | tubes²⁾ | | | blood collection / urine tubes | | | | | | | - |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|------------------------|---------|---------|-------------|---------------|---------------|-----------|---------------|---------------|---------------|-----------|-----------|-----------|-----------|-----------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 11 x 35 | 11 x 35 | 11 x 35 | 11.5 x 67.5 | 13.5 x 60 | 13.5 x 60 | 17.7 x 88 | 13.5 x 60 | 13.5 x 60 | 13.5 x 60 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 |
| vessels per rotor | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 4 |
| Cat. No. | 1063-8 (8 pcs.) | | | 6305 | 1054-A | 1054-A | - | 1054-A | 1054-A | 1054-A | - | - | - | - | - |

Vessels

| | | | | | | |
|------------------------|---------------------------------------|---------|----------|----------|----------|----------|
| | | | | | | |
| capacity in ml | 10 | 1.6-5 | 4-7 | 8 | 8.5-10 | 12 |
| Ø x L in mm | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 125 | 16 x 100 | 17 x 102 |
| max. RCF ²⁾ | EBA 200 | 3,461 | 2,697 | 3,461 | 3,461 | 3,461 |
| max. RCF ²⁾ | EBA 200 S | 6,153 | 4,794 | 6,153 | 6,153 | 6,153 |
| radius in mm | 86 | 69 | 86 | 86 | 86 | 86 |
| Cat. No. | blood collection / urine tubes | | | | | |



Adapter

| | | | | | | |
|--------------------|-----------|-------------|-----------|-----------|-----------|-----------|
| | | | | | | |
| boring Ø x L in mm | 17.7 x 88 | 13.5 x 60 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 |
| vessels per rotor | 8 | 8 | 8 | 4 | 8 | 8 |
| Cat. No. | - | 1059 | - | - | - | - |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

12) For the EBA 200 only! Model EBA 200 S is supplied as standard with an adapter for these tubes.

PACKAGES

EBA 200 S BLOOD TUBE PACKAGE 1

| EBA 200 S BLOOD TUBE PACKAGE 1 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x EBA 200 S centrifuge incl. angle rotor, 8-place | 1802 | 8 | 1.1 - 6 | 13 x 75 | 8,000 | 4,794 |
| - 8 x adapter, 1-place | 1054-A | 8 | 4 - 7 | 13 x 100 | 8,000 | 6,153 |
| - 8 x adapter, 1-place | 1058 | | | | | |

1802SET1

EBA 200 BLOOD TUBE PACKAGE 2

| EBA 200 BLOOD TUBE PACKAGE 2 | number of vessels | volume (ml) | size (mm) | RPM | RCF | |
|--|-------------------|-------------|-----------|----------|-------|-------|
| - 1 x EBA 200 centrifuge incl. angle rotor | 1800 | 8 | 1.1 - 6 | 13 x 75 | 6,000 | 2,777 |
| - 8 x adapter, 1-place | 1059 | 8 | 4 - 7 | 13 x 100 | 6,000 | 3,461 |
| - 8 x adapter, 1-place | 1058 | | | | | |

1800SET2



PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



EBA 200

Top performance for small laboratories

The EBA 200 small centrifuge is a compact medical device used for separating whole blood or blood components of human origin, for example to obtain platelet-rich plasma for autologous therapies. This centrifuge comes equipped as standard with an 8-place angled rotor to accommodate tubes with volumes of up to 10 ml.

— FEATURES

- Max. RPM: 200 - 6,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 3,461
- Max. capacity: 8 x 10 ml
- Small centrifuge including 8-place angle rotor
- Compact design
- Medical Device according to regulation (EU) 2017/745
- Maximum noise level of ≤ 50 dB(A)
- Impulse key for short cycle mode
- 1 acceleration and 2 deceleration stages
- Easy operation with keypad

— FIELDS OF APPLICATION

- Physician's Office Laboratory (POL)
- Dentists
- Small laboratories
- Orthopedics
- Hospitals



More information about the control panel
can be found on [page 202](#)



* If you use special PRP kits, please contact us: info@hettichlab.com

TECHNICAL DATA

| EBA 200 | |
|----------------------------|---|
| voltage ^{*)} | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz |
| consumption | 100 VA |
| emission, immunity | EN/IEC 61326-1, class B |
| max. capacity | 8 x 10 ml |
| max. RPM | 6,000 min ⁻¹ |
| max. RCF | 3,461 |
| running time | 1 – 99 min, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (W x D x H) | 261 x 353 x 228 mm |
| weight | approx. 9 kg |
| max. noise level | ≤ 50 dB (A) |
| Cat. No. | 1810 |
| 100 – 127 V 1 ~ / 50–60 Hz | 1810-01 |
| emission, immunity | FCC class B |

*) Other voltages on request.

ANGLE ROTOR, 8-PLACE



Rotor

| | |
|----------------------------------|-------------------------|
| max. RPM | 6,000 min ⁻¹ |
| max. RCF | 3,461 |
| max. capacity | 8 x 10 ml |
| run up / run down, braked in sec | 17 / 12 |
| angle | 33° |
| Cat. No. | INCLUSIVE |



Vessels

| capacity in ml | 1.4 | 2.6–3.4 | 2.7–3 | 4.5–5 | 4.9 | 7.5–8.2 | 9–10 | 10 | 8.5–10 |
|------------------------|---------------------|---------|-------|-------|-------|---------|-------|--------|--------|
| Ø x L in mm | 8x66 | 13x65 | 11x66 | 11x92 | 13x90 | 15x92 | 16x92 | 15x102 | 16x100 |
| max. RCF ²⁾ | 2,697 | 2,697 | 2,697 | 3,461 | 3,461 | 3,461 | 3,461 | 3,461 | 3,461 |
| radius in mm | 67 | 67 | 67 | 86 | 86 | 86 | 86 | 86 | 86 |
| Bestell-Nr. | tubes / kits | | | | | | | | |



Adapter

| boring Ø x L in mm | 13.5x60 | 13.5x60 | 13.5x60 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 |
|--------------------|---------------|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|
| vessels per rotor | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Cat. No. | 1054-A | 1054-A | 1054-A | - | - | - | - | - | - |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.

EBA 270

Superior separation results in medical applications

The EBA 270 is a small centrifuge with a built-in swing-out rotor that has been developed specifically for use in clinical settings. It can centrifuge blood tubes and urine tubes up to 15 ml in volume at a maximum speed of 4,000 RPM / 2,254 RCF. Its 90° rotor is ideally suited for spinning blood tubes containing a separating gel.

— FEATURES

- Max. RPM: 500 - 4,000 min⁻¹ – adjustable in increments of 100
- Max. RCF: 2,254
- Max. capacity: 6 x 15 ml
- Small centrifuge including 6-place swing-out rotor
- Compact design
- IVDR-conform according to regulation (EU) 2017/746
- Maximum noise level of ≤ 51 dB(A)
- Impulse key for short cycle mode
- 1 acceleration and 2 deceleration stages
- Easy operation with keypad

— FIELDS OF APPLICATION

- Small laboratories
- Physician's Office Laboratory (POL)
- Hospitals



Centrifuge packages for the model can be found on [page 21](#)



More information about the control panel can be found on [page 202](#)



according to regulation (EU) 2017/746




TECHNICAL DATA

| EBA 270 | |
|----------------------------|---|
| voltage *) | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz |
| consumption | 130 VA |
| emission, immunity | EN/IEC 61326-1, class B |
| max. capacity | 6 x 15 ml |
| max. RPM | 4,000 min ⁻¹ |
| max. RCF | 2,254 |
| running time | 1 – 99 min, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 326 x 400 x 239 mm |
| weight | approx. 14 kg |
| max. noise level | ≤ 51 dB (A) |
| Cat. No. | 2300 |
| 100 – 127 V 1 ~ / 50–60 Hz | 2300-01 |
| consumption | 125 VA |
| emission, immunity | FCC class B |

*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

| | | angle | max. RPM | max. capacity | Cat. No | page |
|---|--------------------------|-------|-------------------------|---------------|------------------|------|
|  | swing-out rotor, 6-place | 90° | 4,000 min ⁻¹ | 6 x 15 ml | INCLUSIVE | 20 |

SWING-OUT ROTOR, 6-PLACE



Rotor

| | |
|----------------------------------|--------------------------------|
| max. RPM max. RCF | 4,000 min ¹ 2,254 |
| max. capacity | 6 x 15 ml |
| run up run down, braked in sec | 10 22 |
| angle max. noise level | 90° 51 dB (A) |
| Cat. No. | INCLUSIVE |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|------------------|-----------|-------------------------|---------|---------|---------|---------------------------|---------|---------|----------|---------------------------------------|-----------|---------|---------|---------|
| | | | | | | | | | | | | | | | |
| capacity in ml | 0.5 | 0.5 | 1.5 | 1.5 | 2 | 2 | 4 | 5 | 6 | 15 | 1.1 – 1.4 | 2.6 – 3.4 | 2.7 – 3 | 4 – 5.5 | 4.5 – 5 |
| Ø x L in mm | 10.7 x 46 | 10.7 x 46 | 11 x 38 | 11 x 38 | 11 x 38 | 11 x 38 | 10 x 88 | 12 x 75 | 12 x 82 | 17 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 |
| max. RCF ²⁾ | 1,359 | 1,359 | 1,377 | 1,377 | 1,377 | 1,377 | 2,254 | 1,807 | 1,807 | 2,254 | 1,807 | 1,807 | 1,807 | 2,254 | 2,254 |
| radius in mm | 76 | 76 | 77 | 77 | 77 | 77 | 126 | 101 | 101 | 126 | 101 | 101 | 101 | 126 | 126 |
| Cat. No. | Pediatric | | microliter tubes | | | | tubes²⁾ | | | | blood collection / urine tubes | | | | |

+ 1063-6 + 1063-6 + 1063-6 + 1063-6 + 1063-6 + 1063-6



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 17.5 x 80 | 17.5 x 55 | 17.5 x 80 | 17.5 x 55 | 17.5 x 80 | 17.5 x 55 | 17.5 x 80 | 17.5 x 55 | 17.5 x 55 | 17.5 x 80 | 17.5 x 55 | 17.5 x 55 | 17.5 x 55 | 17.5 x 80 | 17.5 x 80 |
| vessels per rotor | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |
| Cat. No. | 2331-6 | 2333-6 | 2331-6 | 2333-6 | 2331-6 | 2333-6 | 2331-6 | 2333-6 | 2333-6 | 2331-6 | 2333-6 | 2333-6 | 2333-6 | 2331-6 | 2331-6 |

Vessels

| | | | | | | |
|------------------------|---------|------------|----------|------------|---------|----------|
| | | | | | | |
| capacity in ml | 4.9 | 7.5 – 10 | 10 | 1.6 – 7 | 4 – 7 | 8.5 – 10 |
| Ø x L in mm | 13 x 90 | 15/16 x 92 | 15 x 102 | 13/16 x 75 | 16 x 75 | 16 x 100 |
| max. RCF ²⁾ | 2,254 | 2,254 | 2,254 | 1,807 | 1,807 | 2,254 |
| radius in mm | 126 | 126 | 126 | 101 | 101 | 126 |

Cat. No. **blood collection / urine tubes**



Adapter

| | | | | | | |
|--------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | | | | | | |
| boring Ø x L in mm | 17.5 x 80 | 17.5 x 80 | 17.5 x 80 | 17.5 x 55 | 17.5 x 55 | 17.5 x 80 |
| vessels per rotor | 6 | 6 | 6 | 6 | 6 | 6 |
| Cat. No. | 2331-6 | 2331-6 | 2331-6 | 2333-6 | 2333-6 | 2331-6 |

²⁾ Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

PACKAGES

EBA 270 BLOOD TUBE COMPLETE PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|--------|-------------------|-----------------|-----------|-------|-------|
| - 1 x EBA 270 centrifuge incl. swing-out rotor | 2300 | 6 | 1.1 - 7 | 16 x 75 | 4,000 | 1,807 |
| - 1 x adapter (set), 1-place | 2333-6 | 6 | 1,5 - 15 | 17 x 102 | 4,000 | 2,254 |
| - 1 x adapter (set), 1-place | 2331-6 | 6 | 0.5 (Pediatric) | 10,7 x 46 | 4,000 | 1,359 |
| - 1 x adapter Pediatric (set), 1-place | 1063-6 | | | | | |
| 2300SET1 | | | | | | |



PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



EBA 280 | 280 S

Simple rotor change for greater versatility

The EBA 280 and EBA 280 S offer exceptional user comfort and a choice of 6 rotors. The rotor can be removed and replaced easily thanks to the quick release system. The rotor locks in place and remains secure without the use of tools or extra effort. The backlit digital control panel offers the opportunity to save 9 multiple program settings.

— FEATURES

- RPM: 200 - 6,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 4,146 | 5,071
- Max. capacity: 6 x 50 ml
- Small centrifuge with rapid rotor change system
- Choice of 6 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Maximum noise level of ≤ 51 dB(A) (EBA 280)
- Impulse key for short cycle mode
- 9 individual acceleration and 10 deceleration stages
- Easy operation with keypad
- 9 programmable memory settings

— FIELDS OF APPLICATION

- Small laboratories
- Hospitals
- Blood banks
- Physician's Office Laboratory (POL)



Centrifuge packages for the model can be found on [page 28](#)



More information about the control panel can be found on [page 202](#)



according to regulation (EU) 2017/746





TECHNICAL DATA


| | EBA 280 | EBA 280 S |
|----------------------------|---|---|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 – 60 Hz |
| consumption | 185 VA | 330 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 6 x 50 ml | 6 x 50 ml |
| max. RPM | 6,000 min ⁻¹ | 6,000 min ⁻¹ |
| max. RCF | 4,146 | 5,071 |
| running time | 1 – 99 min: 59 sec, y continuous run, short cycle mode (impulse button) | 1 – 99 min: 59 sec, y continuous run, short cycle mode (impulse button) |
| dimensions (W x D x H) | 326 x 400 x 242 mm | 326 x 400 x 242 mm |
| weight | approx. 12 kg | approx. 12 kg |
| noise level | ≤ 47 dB (A) with rotor 1137 | ≤ 50 dB (A) with rotor 1137 |
| Cat. No. | 1101 | 1102 |
| 100 – 127 V 1 ~ / 50–60 Hz | 1101-01 | 1102-01 |
| emission, immunity | FCC class B | FCC class B |

*) Other voltages on request.

AVAILABLE ROTORS
















| SWING-OUT ROTORS | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|---------------------------|-------|-------------------------|---------------|-------------|------|
|  | swing-out rotor, 6-place | 90° | 6,000 min ⁻¹ | 6 x 15 ml | 1146 | 24 |
|  | swing-out rotor, 8-place | 90° | 5,000 min ⁻¹ | 8 x 10 ml | 1148 | 25 |
|  | swing-out rotor, 12-place | 60° | 5,000 min ⁻¹ | 12 x 5 ml | 1142 | 25 |
| ANGLE ROTORS | | | | | | |
|  | angle rotor, 6-place | 35° | 6,000 min ⁻¹ | 6 x 50 ml | 1137 | 26 |
|  | angle rotor, 12-place | 35° | 5,000 min ⁻¹ | 12 x 7 ml | 1133 | 26 |
|  | angle rotor, 12-place | 35° | 6,000 min ⁻¹ | 12 x 15 ml | 1139 | 27 |
















— SWING-OUT ROTOR, 6-PLACE | 1146





| | |
|---|---|
|  | |
| Rotor | |
| max. RPM | EBA 280 EBA 280 S 4,700 min ⁻¹ 6,000 min ⁻¹ |
| max. RCF | 3,112 5,071 |
| max. capacity | 6 x 15 ml |
| run up / run down, braked in sec | 9 / 11 11 / 13 |
| angle max. noise level | 90° 49 dB (A) |
| Cat. No. | 1146 |





| | |
|--|-----------------|
|  | |
| Bucket | |
| Cat. No. | 1147-6 (6 pcs.) |



| | | | | | | | | | | | | | | | | |
|------------------------|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Vessels | |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| capacity in ml | | 0.5 | 1.5 | 2 | 4 | 5 | 6 | 15 | 1.1-1.4 | 2.6-3.4 | 2.7-3 | 4-5.5 | 4.5-5 | 4.9 | 7.5-10 | 1.6-5 |
| Ø x L in mm | | 10.7x46 | 11 x 38 | 11 x 38 | 10x88 | 12x75 | 12x82 | 17x100 | 8x66 | 13x65 | 11x66 | 15x75 | 11x92 | 13x90 | 15/16x92 | 13x75 |
| max. RCF ²⁾ | EBA 280 | 1,877 | 1,902 | 1,902 | 3,112 | 2,618 | 2,865 | 3,112 | 2,618 | 2,618 | 2,618 | 3,112 | 3,112 | 3,112 | 3,112 | 2,618 |
| max. RCF ²⁾ | EBA 280 S | 3,059 | 3,099 | 3,099 | 5,071 | 4,266 | 4,669 | 5,071 | 4,266 | 4,266 | 4,266 | 5,071 | 5,071 | 5,071 | 5,071 | 4,266 |
| radius in mm | | 76 | 77 | 77 | 126 | 106 | 116 | 126 | 106 | 106 | 106 | 126 | 126 | 126 | 126 | 106 |
| Cat. No. | | Pediatric | microliter tubes | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | |
|--------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Adapter | |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | | 11 x 35 | 11 x 35 | 11 x 35 | 17.5x80 | 13.5x59 | 17.5x80 | 17.5x80 | 13.5x59 | 13.5x59 | 13.5x59 | 17.5x80 | 17.5x80 | 17.5x80 | 17.5x80 | 13.5x59 |
| vessels per rotor | | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |
| Cat. No. | | 1063-6 (6 pcs.) | | | - | 1053-6 | 0767-6 | - | 1053-6 (6 pcs.) | | | - | - | - | - | 1053-6 |

| | | | | | |
|------------------------|-----------|---|---|---|---|
| Vessels | |  |  |  |  |
| capacity in ml | | 4-7 | 4-7 | 8.5-10 | 12 |
| Ø x L in mm | | 16x75 | 13x100 | 16 x 100 | 17x102 |
| max. RCF ²⁾ | EBA 280 | 2,865 | 3,112 | 3,112 | 3,112 |
| max. RCF ²⁾ | EBA 280 S | 4,669 | 5,071 | 5,071 | 5,071 |
| radius in mm | | 116 | 126 | 126 | 126 |
| Cat. No. | | blood collection/urine tubes | | | |

| | | | | | |
|--------------------|--|---|---|---|---|
| Adapter | |  |  |  |  |
| boring Ø x L in mm | | 17.5x80 | 13.5x79 | 17.5x80 | 17.5x80 |
| vessels per rotor | | 6 | 6 | 6 | 6 |
| Cat. No. | | 0767-6 | 1058 | - | - |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 8-PLACE | 1148



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 5,000 min ⁻¹ 2,991 |
| max. capacity | 8 x 10 ml |
| run up run down, braked in sec | 8 10 |
| angle max. noise level | 90° 50 dB (A) |
| Cat. No. | 1148 |



Vessels

| | | | | | | | | |
|------------------------|---------------------------|---------|---------|---------------------------------------|---------|---------|---------|---------|
| | | | | | | | | |
| capacity in ml | 5 | 6 | 10 | 2.6-3.4 | 2.7-3 | 4-5.5 | 1.6-5 | 4-7 |
| Ø x L in mm | 12 x 75 | 12 x 82 | 17 x 70 | 13 x 65 | 11 x 66 | 15 x 75 | 13 x 75 | 16 x 75 |
| max. RCF ²⁾ | 2,991 | 2,991 | 2,991 | 2,991 | 2,991 | 2,991 | 2,991 | 2,991 |
| radius in mm | 107 | 107 | 107 | 107 | 107 | 107 | 107 | 107 |
| Cat. No. | tubes²⁾ | | | blood collection / urine tubes | | | | |



Bucket

| | | | | | | | | |
|--------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | | | | | | | | |
| boring Ø x L in mm | 13 x 53 | 13 x 53 | 17.5 x 53 | 13 x 53 | 13 x 53 | 17.5 x 53 | 13 x 53 | 17.5 x 53 |
| vessels per rotor | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Cat. No. | 1131-A | 1131-A | 1132-A | 1131-A | 1131-A | 1132-A | 1131-A | 1132-A |

SWING-OUT ROTOR, 12-PLACE | 1142



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 5,000 min ⁻¹ 2,963 |
| max. capacity | 12 x 5 ml |
| run up run down, braked in sec | 10 12 |
| angle max. noise level | 60° 49 dB (A) |
| Cat. No. | 1142 |



Vessels

| | | | | |
|------------------------|--------------------------|---------------------------------------|---------|---------|
| | | | | |
| capacity in ml | 5 | 2.6-3.4 | 2.7-3 | 1.6-5 |
| Ø x L in mm | 13 x 75 | 13 x 65 | 11 x 66 | 13 x 75 |
| max. RCF ²⁾ | 2,963 | 2,963 | 2,963 | 2,963 |
| radius in mm | 106 | 106 | 106 | 106 |
| Cat. No. | tube²⁾ | blood collection / urine tubes | | |



Bucket

| | | | | |
|--------------------|---------------|---------------|---------------|---------------|
| | | | | |
| boring Ø x L in mm | 13.2 x 53 | 13.2 x 53 | 13.2 x 53 | 13.2 x 53 |
| vessels per rotor | 12 | 12 | 12 | 12 |
| Cat. No. | 1127-A | 1127-A | 1127-A | 1127-A |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 6-PLACE | 1137



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 4,025 |
| max. capacity | 6 x 50 ml |
| run up run down, braked in sec | 20 17 |
| angle max. noise level | 35° 47 dB (A) |
| Cat. No. | 1137 |



Vessels

| | | | | | | | | | | | | |
|------------------------|---------------------------|----------|----------|----------|---------------------------------------|----------|---------|----------|-----------------------------|----------|---------|----------|
| | | | | | | | | | | | | |
| capacity in ml | 7 | 15 | 25 | 50 | 9-10 | 10 | 1.6-5 | 4-7 | 15 | 50 | 30 | 50 |
| Ø x L in mm | 12 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 17 x 120 | 29 x 115 | 26 x 95 | 29 x 107 |
| max. RCF ²⁾ | 3,944 | 3,783 | 3,703 | 4,025 | 3,783 | 3,783 | 2,978 | 3,783 | 3,824 | 3,824 | 3,703 | 3,904 |
| radius in mm | 98 | 94 | 92 | 100 | 94 | 94 | 74 | 94 | 95 | 95 | 92 | 97 |
| Cat. No. | tubes²⁾ | | | | blood collection / urine tubes | | | | tubes with screw cap | | | |



Adapter

| | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | |
| boring Ø x L in mm | 13 x 92 | 17.5 x 95 | 26 x 88 | 35 x 96 | 17.5 x 95 | 17.5 x 95 | 17.5 x 95 | 17.5 x 95 | 17 x 98 | 30 x 98 | 26 x 88 | 29 x 95 |
| vessels per rotor | 18 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 3 | 6 | 6 |
| Cat. No. | 1632 | 1635 | 1633 | - | 1635 | 1635 | 1635 | 1635 | 1631 | 1641 | 1633 | 1634 |

— ANGLE ROTOR, 12-PLACE | 1133



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 5,000 min ⁻¹ 2,879 |
| max. capacity | 12 x 7 ml |
| run up run down, braked in sec | 8 10 |
| angle max. noise level | 35° 51 dB (A) |
| Cat. No. | 1133 |



Vessels

| | | | |
|------------------------|---------------------------|---------|----------|
| | | | |
| capacity in ml | 5 | 6 | 7 |
| Ø x L in mm | 12 x 75 | 12 x 82 | 12 x 100 |
| max. RCF ²⁾ | 2,879 | 2,879 | 2,879 |
| radius in mm | 103 | 103 | 103 |
| Cat. No. | tubes²⁾ | | |




Adapter

| | | | |
|--------------------|-----------|-----------|-----------|
| | | | |
| boring Ø x L in mm | 12.5 x 66 | 12.5 x 66 | 12.5 x 66 |
| vessels per rotor | 12 | 12 | 12 |
| Cat. No. | - | - | - |

What makes the 1133 rotor special is its adapters with a decanting aid. The decanting aid firmly holds the tube and keeps it from falling out when the supernatant is decanted. The 1133 rotor is often used in blood typing serology.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 12-PLACE | 1139



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 4,146 |
| max. capacity | 12 x 15 ml |
| run up run down, braked in sec | 16 16 |
| angle max. noise level | 35° 50 dB (A) |
| Cat. No. | 1139 |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|------------------|-------------------------|---------|---------------------------|---------|---------|----------|---------------------------------------|---------|---------|---------|---------|------------|----------|---------|
| | | | | | | | | | | | | | | | |
| capacity in ml | 0.5 | 1.5 | 2 | 4 | 5 | 6 | 15 | 1.1–1.4 | 2.6–3.4 | 2.7–3 | 4.5–5 | 4.9 | 7.5–10 | 10 | 1.6–5 |
| Ø x L in mm | 10.7 x 46 | 11 x 38 | 11 x 38 | 10 x 88 | 12 x 75 | 12 x 82 | 17 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 11 x 92 | 13 x 90 | 15/16 x 92 | 15 x 102 | 13 x 75 |
| max. RCF ²⁾ | 2,777 | 2,737 | 2,737 | 3,300 | 3,300 | 3,300 | 4,146 | 3,300 | 3,300 | 3,300 | 4,146 | 4,146 | 4,146 | 4,146 | 3,300 |
| radius in mm | 69 | 68 | 68 | 82 | 82 | 82 | 103 | 82 | 82 | 82 | 103 | 103 | 103 | 103 | 82 |
| Cat. No. | Pediatric | microliter tubes | | tubes²⁾ | | | | blood collection / urine tubes | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|------------------------|---------|---------|-------------|---------------|---------------|-----------|---------------|---------------|---------------|---------------|---------------|-----------|-----------|---------------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 11 x 35 | 11 x 35 | 11 x 35 | 11,5 x 67,5 | 13,5 x 60 | 13,5 x 60 | 17,7 x 88 | 13,5 x 60 | 13,5 x 60 | 13,5 x 60 | 13,5 x 60 | 13,5 x 60 | 17,7 x 88 | 17,7 x 88 | 13,5 x 60 |
| vessels per rotor | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| Cat. No. | 1063-6 (6 uds.) | | | 6305 | 1054-A | 1054-A | - | 1054-A | 1054-A | 1054-A | 1054-A | 1054-A | - | - | 1054-A |

Vessels

| | | | | | |
|------------------------|---------------------------------------|----------|----------|----------|----------|
| | | | | | |
| capacity in ml | 4–7 | 8 | 8.5–10 | 12 | 15 |
| Ø x L in mm | 13 x 100 | 16 x 125 | 16 x 100 | 17 x 102 | 17 x 120 |
| max. RCF ²⁾ | 4,146 | 4,146 | 4,146 | 4,146 | 4,146 |
| radius in mm | 103 | 103 | 103 | 103 | 103 |
| Cat. No. | blood collection / urine tubes | | | | - |



Adapter

| | | | | | |
|--------------------|-------------|-----------|-----------|---------------|-----------|
| | | | | | |
| boring Ø x L in mm | 13.5 x 79 | 17.7 x 88 | 17.7 x 88 | 13.5 x 60 | 17.7 x 88 |
| vessels per rotor | 12 | 6 | 12 | 12 | 6 |
| Cat. No. | 1058 | - | - | 1054-A | - |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

PACKAGES

EBA 280 SEROLOGY PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x EBA 280 centrifuge | 1101 | 12 | 1.6 - 5 | 13 x 75 | 5,000 | 2,963 |
| - 1 x swing-out rotor, 12-place | 1142 | | | | | |
| - 12 x bucket | 1127-A | | | | | |

1101SET1

EBA 280 BLOOD TUBE PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x EBA 280 centrifuge | 1101 | 6 | 1.1 - 5 | 13 x 75 | 4,700 | 2,618 |
| - 1 x swing-out rotor, 6-place | 1146 | 6 | | 13 x 100 | 4,700 | 3,112 |
| - 1 x bucket (set) | 1147-6 | 6 | 4 - 7 | 16 x 75 | 4,700 | 2,865 |
| - 1 x adapter (set), 1-place | 1053-6 | | | | | |
| - 6 x adapter, 1-place | 1058 | | | | | |
| - 1 x spacer (set) | 0767-6 | | | | | |

1101SET2

EBA 280 BLOOD TUBE PACKAGE 3

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------|------|-------------------|-------------|-----------|-------|-------|
| - 1 x EBA 280 centrifuge | 1101 | 12 | 1.6 - 5 | 13 x 75 | 6,000 | 3,381 |
| - 1 x angle rotor, 12-place | 1139 | 12 | 4 - 7 | 13 x 100 | 6,000 | 4,146 |
| - 12 x adapter, 1-place | 1059 | | | | | |
| - 12 x adapter, 1-place | 1058 | | | | | |

1101SET3

EBA 280 BLOOD TUBE PACKAGE 4

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x EBA 280 centrifuge | 1101 | 8 | 1.6 - 6 | 13 x 75 | 5,000 | 2,991 |
| - 1 x swing-out rotor, 8-place | 1148 | 8 | 4 - 10 | 16 x 75 | 5,000 | 2,991 |
| - 8 x bucket | 1131-A | | | | | |
| - 8 x bucket | 1132-A | | | | | |

1101SET4

EBA 280 SEROLOGY DECANTING PACKAGE 5

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------|------|-------------------|-------------|---------------|-------|-------|
| - 1 x EBA 280 centrifuge | 1101 | 12 | 5 - 7 | 12 x 75 / 100 | 5,000 | 2,879 |
| - 1 x angle rotor, 12-place | 1133 | | | | | |

1101SET5

EBA 280 S BLOOD TUBE PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x EBA 280 S centrifuge | 1102 | 6 | 1.1 - 5 | 13 x 75 | 6,000 | 4,266 |
| - 1 x swing-out rotor, 6-place | 1146 | 6 | 4 - 7 | 13 x 100 | 6,000 | 5,071 |
| - 1 x bucket (set) | 1147-6 | 6 | 4 - 7 | 16 x 75 | 6,000 | 4,669 |
| - 1 x adapter (set) | 1053-6 | | | | | |
| - 6 x adapter, 1-place | 1058 | | | | | |
| - 1 x spacer (set) | 0767-6 | | | | | |

1102SET1



PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



HAEMATOKRIT 200

Haematokrit determination in just 7 minutes

The HAEMATOKRIT 200 is a fast and efficient centrifuge for determining hematocrit count. It runs at 13,000 RPM and accommodates up to 24 capillary tubes to a maximum RCF of 16,060. Results can be clearly viewed with the integrated Haematocrit reader in the rotor lid.

— FEATURES

- RPM: 200 - 13,000 min⁻¹ – adjustable up to 10,000 RPM in increments of 10, above in increments of 100
- Max. RCF: 16,060
- Compact, high-performance hematocrit centrifuge
- IVD-conform according to directive 98/79/EC
- Maximum noise level of ≤ 56 dB(A)
- Impulse key for short cycle mode
- 1 acceleration and 2 deceleration stages
- Easy operation with keypad

— FIELDS OF APPLICATION

- Manufacturers of analyzing systems
- Small hospitals
- Sports medicine



More information about the control panel
can be found on [page 202](#)



TECHNICAL DATA

HAEMATOKRIT 200


| | |
|--------------------|---|
| voltage *) | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz |
| consumption | 270 VA |
| emission, immunity | EN/IEC 61326-1, class B |
| max. capacity | 24 capillaries |
| max. RPM | 13,000 min ⁻¹ |
| max. RCF | 16,060 |
| running time | 1 – 99 min, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 261 x 353 x 228 mm |
| weight | approx. 10 kg |
| max. noise level | ≤ 56 dB (A) |

Cat. No. 1801

| | |
|----------------------------|-------------|
| 100 – 127 V 1 ~ / 50–60 Hz | 1801-01 |
| emission, immunity | FCC class B |

*) Other voltages on request.

AVAILABLE ROTOR




Rotor

| | |
|----------------------------------|-----------------------------------|
| max. RPM max. RCF | 13,000 min ⁻¹ 16,060 |
| max. capacity | 24 capillaries |
| run up run down, braked in sec | 9 16 |
| angle max. noise level | 90° 56 dB (A) |
| measuring lid | inclusive |
| Cat. No. | INCLUSIVE |



Capillaries

| | |
|------------------------|---|
| Standard |  |
| max. RCF ²⁾ | 16,060 |
| radius in mm | 85 |
| Cat. No. | - |



Adapter

| | |
|-----------------------|----------|
| boring Ø x L in mm | - |
| capillaries per rotor | 24 |
| Cat. No. | - |

HOLDING TRAYS

The holding trays in rotor 2076 are easy to clean and disposable in the case of glass breakage.



2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.

MICROLITER CENTRIFUGES

Powerful results at the micro level



MIKRO 185
on page 34



MIKRO 200 | 200 R
on page 38



MIKRO 220 | 220 R
on page 44

02



MIKRO 185

Small footprint with unmatched capacity

The MIKRO 185 accommodates 12, 18 or 24 samples and is suitable for a wide range of tasks, thanks to a maximum RCF of 18,845 and a choice of 4 rotors. Spin column kits (minipreps) can also be used thanks to the special design of the 1213-A rotor.

— FEATURES

- RPM: 200 - 14,000 min⁻¹ – Adjustable up to 10,000 RPM in increments of 10, above in increments of 100
- Max. RCF: 18,845
- Max. capacity: 24 x 2.0 ml
- Compact, high-performance microlitre centrifuge
- Choice of 4 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Noise level of ≤ 54 dB (A) with rotor 1252-A
- Impulse button for short centrifugation
- 1 acceleration and 2 deceleration stages
- Easy operation with keypad

— FIELDS OF APPLICATION

- Hospitals
- Pediatric clinics
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic Research
- Forensic laboratories
- Paternity testing laboratories
- Blood centers
- PCR analytics



More information about the control panel can be found on [page 202](#)



according to regulation (EU) 2017/746



TECHNICAL DATA

| MIKRO 185 | |
|----------------------------|---|
| voltage *) | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz |
| consumption | 390 VA |
| emission, immunity | EN/IEC 61326-1, class B |
| max. capacity | 24 x 1.5 / 2.0 ml |
| max. RPM | 14,000 min ⁻¹ |
| max. RCF | 18,845 |
| running time | 1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 261 x 353 x 228 mm |
| weight | approx. 11 kg |
| noise level | ≤ 54 dB (A) with rotor 1252-A |
| Cat. No. | 1203 |
| 100 – 127 V 1 ~ / 50–60 Hz | 1203-01 |
| emission, immunity | FCC class B |

*) Other voltages on request.

AVAILABLE ROTORS

| ANGLE ROTORS | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|--|-------|--------------------------|---------------|---------------|------|
|  | angle rotor, 24-place | 45° | 14,000 min ⁻¹ | 24 x 2 ml | 1226-A | 36 |
|  | angle rotor, 12-place | 45° | 14,000 min ⁻¹ | 12 x 2 ml | 1252-A | 36 |
|  | angle rotor, 18-place | 45° | 14,000 min ⁻¹ | 18 x 2 ml | 1258-A | 37 |
|  | angle rotor, 18-place for spin column kits | 45° | 14,000 min ⁻¹ | 18 x 2 ml | 1213-A | 37 |


PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology










— ANGLE ROTOR, 24-PLACE | 1226-A

| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 14,000 min ⁻¹ 18,845 |
| max. capacity | 24 x 2 ml |
| run up run down, braked in sec | 15 15 |
| angle max. noise level | 45° 59 dB (A) |
| Cat. No. | 1226-A |

Lid bioseal ⁵⁾

Cat. No.


**INCLUSIVE**

| | | | | | | | |
|------------------------|---|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 | 10.7 x 46 |
| max. RCF ²⁾ | 18,845 | 18,845 | 18,845 | 18,845 | 18,845 | 18,845 | 17,749 |
| radius in mm | 86 | 86 | 86 | 86 | 86 | 86 | 81 |
| Cat. No. | microliter tubes | | | | | | Pediatric |



| | | | | | | | |
|--------------------|---|---|---|---|---|---|---|
| Adapter |  |  |  |  |  |  |  |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10,2x19,3 | 11,2x39 | 11,2x39 |
| vessels per rotor | 24 | 24 | 24 | 24 | 24 | 24 | 12 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 0788 |

— ANGLE ROTOR, 12-PLACE | 1252-A








| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 14,000 min ⁻¹ 15,558 |
| max. capacity | 12 x 2 ml |
| run up run down, braked in sec | 15 15 |
| angle max. noise level | 45° 54 dB (A) |
| Cat. No. | 1252-A |



Lid

Cat. No.

**INCLUSIVE**


| | | | | | | | |
|------------------------|---|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 | 10.7 x 46 |
| max. RCF ²⁾ | 15,558 | 15,558 | 15,558 | 15,558 | 15,558 | 15,558 | 14,462 |
| radius in mm | 71 | 71 | 71 | 71 | 71 | 71 | 66 |
| Cat. No. | microliter tubes | | | | | | Pediatric |



| | | | | | | | |
|--------------------|---|---|---|---|---|---|---|
| Adapter |  |  |  |  |  |  |  |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10,2x19,3 | 11,2x39 | 11,2x39 |
| vessels per rotor | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 0788 |

- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters 2031.








— ANGLE ROTOR, 18-PLACE | 1258-A

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 14,000 min ⁻¹ 16,654 |
| max. capacity | 18 x 2 ml |
| run up run down, braked in sec | 15 15 |
| angle max. noise level | 45° 56 dB (A) |
| Cat. No. | 1258-A |











| | |
|--|------------------|
| Lid | |
|  | |
| Cat. No. | INCLUSIVE |




| | | | | | | | |
|------------------------|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |
| Vessels | | | | | | | |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6x18 | 6 x 45 | 8 x 30 | 8x45 | 11x38 | 11x38 | 10.7x46 |
| max. RCF ²⁾ | 16,654 | 16,654 | 16,654 | 16,654 | 16,654 | 16,654 | 15,558 |
| radius in mm | 76 | 76 | 76 | 76 | 76 | 76 | 71 |
| Cat. No. | microliter tubes | | | | | | Pediatric |



| | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| Adapter | | | | | | | |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10,2x19,3 | 10.2x19 | 11.2x39 |
| vessels per rotor | 18 | 18 | 18 | 18 | 18 | 18 | 9 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 0788 |


















— ANGLE ROTOR, 18-PLACE | 1213-A

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 14,000 min ⁻¹ 16,654 |
| max. capacity | 18 x 2 ml |
| run up run down, braked in sec | 16 15 |
| angle max. noise level | 45° 57 dB (A) |
| Cat. No. | 1213-A |



| | |
|--|------------------|
| Lid bioseal⁵⁾ | |
|  | |
| Cat. No. | INCLUSIVE |



| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |
| Vessels | | | | | | | | |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 1.5 | 2.0 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 | 11 x 38 | 11 x 38 |
| max. RCF ²⁾ | 16,654 | 16,654 | 16,654 | 16,654 | 16,654 | 16,654 | 16,654 | 16,654 |
| radius in mm | 76 | 76 | 76 | 76 | 76 | 76 | 76 | 76 |
| Cat. No. | microliter tubes | | | | | | micro spin columns | |
|  |  |  |  |  |  |  |  |  |
| Adapter | | | | | | | | |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10.2x19.3 | 11.2x39 | 10.2x19.3 | 11.2x39 |
| vessels per rotor | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 18 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031 ⁷⁾ | - | 2031 ⁷⁾ | - |

- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters 2031.

MIKRO 200 | 200 R

Faster results in molecular biology

The MIKRO 200 and MIKRO 200 R are amongst the highest-speed microliter centrifuges in their class. Rotors are designed to spin microliter and PCR tubes. MIKRO 200 achieves a maximum RCF of 21,382 with up to 30 tubes, enabling rapid processing of samples and optimal separation, at low noise levels of 54 dB(A). This unit is available with refrigeration and a temperature range from -10 °C to +40 °C (MIKRO 200 R).

— FEATURES

- RPM: 500 - 15,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 21,382
- Max. capacity: 30 x 2.0 ml
- Choice of 4 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Impulse key for short cycle mode
- Easy operation with keypad and control knob
- 4 program memories for more individuality
- 9 individual acceleration and 9 deceleration stages
- Model 200 R coolable from -10 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Pediatric clinics
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Forensic laboratories
- Molecular diagnostics



Centrifuge packages for the model can be found on [page 42](#)



More information about the control panel can be found on [page 202](#)



according to regulation (EU) 2017/746



TECHNICAL DATA


| | MIKRO 200 non-refrigerated | MIKRO 200 R refrigerated |
|--|--|--|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 Hz |
| consumption | 240 VA | 450 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 30 x 1.5 / 2.0 ml | 30 x 1.5 / 2.0 ml |
| max. RPM | 15,000 min ⁻¹ | 15,000 min ⁻¹ |
| max. RCF | 21,382 | 21,382 |
| running time | 1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button) | 1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button) |
| dimesions (WxDxH) | 275 x 344 x 260 mm | 281 x 553 x 260 mm |
| weight | approx. 11.5 kg | approx. 28 kg |
| noise level | ≤ 58 dB (A) with rotor 2434 | ≤ 51 dB (A) with rotor 2437 |
| temperature control, infinitely variable | - | from -10 to +40 °C |
| Cat. No. | 2400 | 2405 |
| 100 – 127 V 1 ~ / 50–60 Hz | 2400-01 | 2405-01 |
| consumption | 270 VA | 630 VA |
| emission, immunity | FCC class B | FCC class B |

*) Other voltages on request.

AVAILABLE ROTORS

| ANGLE ROTORS | angle | max. RPM | max. capacity | Cat. No. | page |
|---|-----------------------------|--------------------------|------------------|---------------|------|
|  angle rotor, 24-place | 45° | 15,000 min ⁻¹ | 24 x 2 ml | 2434 | 40 |
|  angle rotor, 30-place | 45° inside / 55° outside | 15,000 min ⁻¹ | 30 x 2 ml | 2437 | 40 |
|  angle rotor, 24-place for spin column kits | 45° | 15,000 min ⁻¹ | 24 x 2 ml | 2428 | 41 |
|  angle rotor, 4-place | 45° | 15,000 min ⁻¹ | 4 x 8 PCR strips | 2418-A | 41 |








— ANGLE ROTOR, 24-PLACE | 2434

| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 15,000 min ⁻¹ 21,382 |
| max. capacity | 24 x 2 ml |
| run up run down, braked in sec | 20 28 |
| angle max. noise level | 45° 53 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 2434 |







Lid bioseal ²⁾

Cat. No.


**INCLUSIVE**

| | | | | | | | |
|------------------------|---|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 | 10.7 x 46 |
| max. RCF ²⁾ | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 20,376 |
| radius in mm | 85 | 85 | 85 | 85 | 85 | 85 | 81 |
| Cat. No. | microliter tubes | | | | | | Pediatric |

**Adapter**

| | | | | | | | |
|--------------------|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10,2 x 19,3 | 11,2 x 42,6 | 11,2 x 39 |
| vessels per rotor | 24 | 24 | 24 | 24 | 24 | 24 | 12 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 0788 |








— ANGLE ROTOR, 30-PLACE | 2437

| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 15,000 min ⁻¹ 21,382 |
| max. capacity | 30 x 2 ml |
| run up run down, braked in sec | 22 30 |
| angle max. noise level | 45° inside / 55° outside 51 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 2437 |


Lid bioseal ²⁾

Cat. No.

**INCLUSIVE**



| | | | | | | | |
|------------------------|---|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 | 10.7 x 46 |
| max. RCF ²⁾ | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 20,376 |
| radius in mm | 85 | 85 | 85 | 85 | 85 | 85 | 81 |
| Cat. No. | microliter tubes | | | | | | Pediatric |

**Adapter**










| | | | | | | | |
|--------------------|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10,2 x 19,3 | 11,2 x 41,3 | 11,2 x 39 |
| vessels per rotor | 30 | 30 | 30 | 30 | 30 | 30 | 15 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 0788 |










- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

— ANGLE ROTOR, 24-PLACE | 2428



| | | | | | |
|----------------------------------|---|---|----------------------------------|--|------------------|
| Rotor |  | + | Lid bioseal ⁵⁾ |  | INCLUSIVE |
| max. RPM max. RCF | 15,000 min ⁻¹ 21,382 | | Cat. No. | | |
| max. capacity | 24 x 2 ml | | | | |
| run up run down, braked in sec | 20 28 | | | | |
| angle max. noise level | 45° 53 dB (A) | | | | |
| temperature in °C ¹⁾ | +4 | | | | |
| Cat. No. | 2428 | | | | |




| | | | | | | | | | |
|------------------------|---|---|---|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |  |  |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 | 11 x 38 | 11 x 38 | 10.7 x 46 |
| max. RCF ²⁾ | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 20,376 |
| radius in mm | 85 | 85 | 85 | 85 | 85 | 85 | 85 | 85 | 81 |
| Cat. No. | | | | | | | | | |



| | | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---|---|
| + |  |  |  |  |  |  |  |  |  |
| Adapter | | | | | | | | | |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10.2 x 19.3 | 10.2 x 19 | 10.2 x 19.3 | 11.2 x 42.6 | 11.2 x 39 |
| vessels per rotor | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 12 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 2031⁷⁾ | - | 0788 |

— ANGLE ROTOR, 4-PLACE | 2418-A

| | | | | | |
|----------------------------------|---|---|-----------------|--|--------------|
| Rotor |  | + | Lid |  | E3243 |
| max. RPM max. RCF | 15,000 min ⁻¹ 14,338 | | Cat. No. | | |
| max. capacity | 4 x 8 PCR strips | | | | |
| run up run down, braked in sec | 19 28 | | | | |
| angle | 45° | | | | |
| temperature in °C ¹⁾ | +4 | | | | |
| Cat. No. | 2418-A | | | | |



| | | |
|------------------------|---|-------------------|
| Vessels |  | |
| capacity in ml | 0.2 | 0.2 |
| Ø x L in mm | 6 x 18 | - |
| max. RCF ²⁾ | 14,338 | 14,338 |
| radius in mm | 57 | 57 |
| Cat. No. | - | PCR strips |

| | | |
|--------------------|---|---|
| + |  |  |
| Adapter | | |
| boring Ø x L in mm | 6.5 x 15.5 | 6.5 x 15.5 |
| vessels per rotor | 32 | 4 x 8 |
| Cat. No. | - | - |

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

PACKAGES

MIKRO 200 MICROLITER TUBES PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 200 | 2400 | 24 | 0.2 - 2.0 | 11 x 38 | 15,000 | 21,382 |
| - 1 x angle rotor 24-place, incl. lid bioseal | 2434 | 12 | 0.5 (Pediatric) | 10.7 x 46 | 15,000 | 20,376 |

2400SET1

MIKRO 200 MICROLITER TUBES PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 200 | 2400 | 30 | 0.2 - 2.0 | 11 x 38 | 15,000 | 21,382 |
| - 1 x angle rotor 30-place, incl. lid bioseal | 2437 | 15 | 0.5 (Pediatric) | 10.7 x 46 | 15,000 | 20,376 |

2400SET2

MIKRO 200 R MICROLITER TUBES PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 200 R | 2405 | 24 | 0.2 - 2.0 | 11 x 38 | 15,000 | 21,382 |
| - 1 x angle rotor 24-place, incl. lid bioseal | 2434 | 12 | 0.5 (Pediatric) | 10.7 x 46 | 15,000 | 20,376 |

2405SET1

MIKRO 200 R MICROLITER TUBES PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 200 R | 2405 | 30 | 0.2 - 2.0 | 11 x 38 | 15,000 | 21,382 |
| - 1 x angle rotor 30-place, incl. lid bioseal | 2437 | 15 | 0.5 (Pediatric) | 10.7 x 46 | 15,000 | 20,376 |

2405SET2

MIKRO 200 R SPIN COLUMN PACKAGE 3

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 200 R | 2405 | 24 | 0.2 - 2.0 | 11 x 38 | 15,000 | 21,382 |
| - 1 x angle rotor 24-place, incl. lid bioseal for spin column kits | 2428 | 12 | 0.5 (Pediatric) | 10.7 x 46 | 15,000 | 20,376 |


2405SET3



DID YOU KNOW?

The Download Center on our website allows you to access the most up to date documents including catalogs, brochures, data sheets and certificates.

Try it now: www.hettichlab.com/downloadcenter

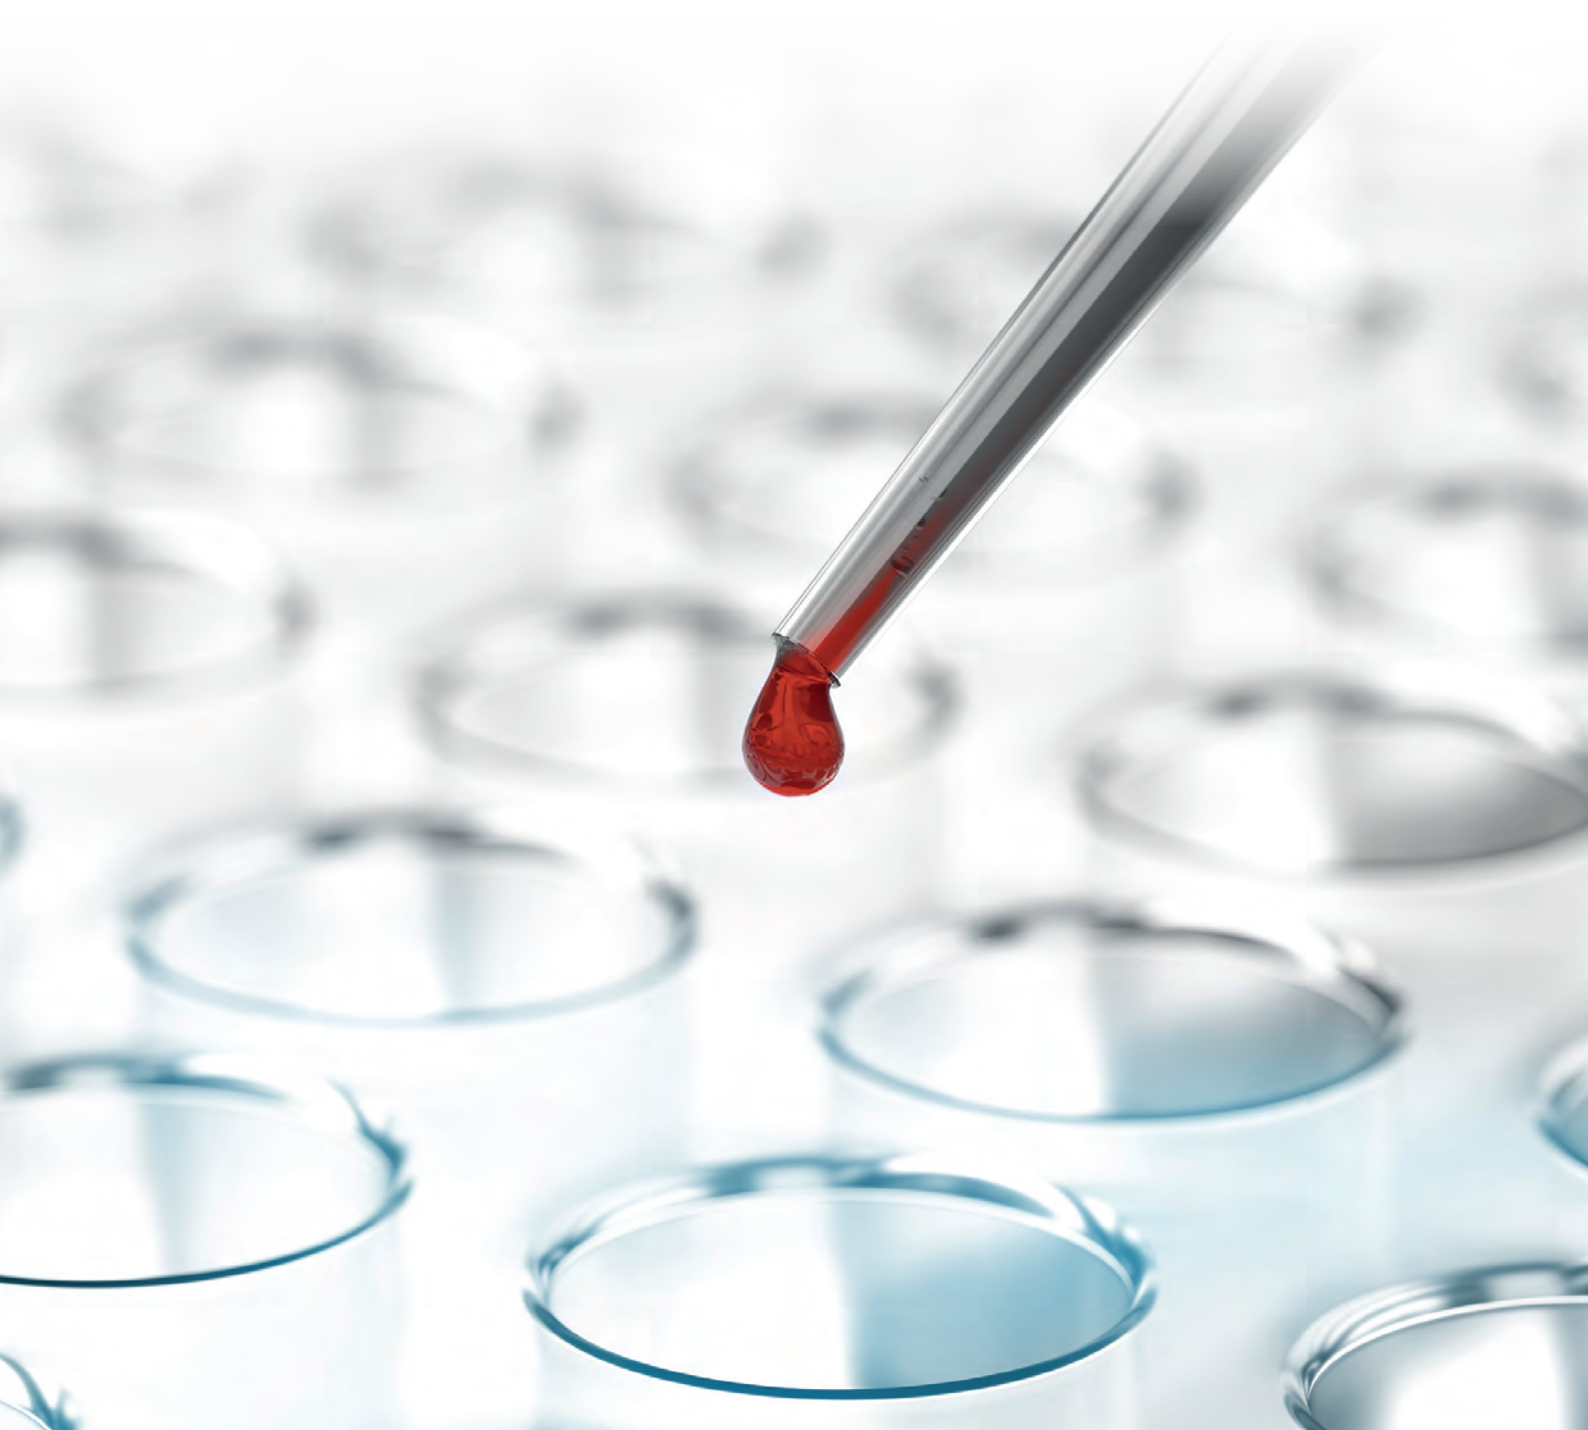

MIKRO 220 | 220 R

Fast and flexible

The MIKRO 220 spins at an unmatched speed of 18,000 RPM and delivers an RCF of 31,514 in just 26 seconds. Ultimate flexibility is provided by a choice of 8 different rotors from 0.2 ml microliter tubes to 50 ml conical tubes, allowing for numerous research applications on a single machine. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (MIKRO 220 R).

— FEATURES

- RPM: 500 - 18,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 31,514
- Max. capacity: 60 x 2.0 ml
- Compact, high-performance microlitre centrifuge
- Choice of 8 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Impulse key for short cycle mode
- Easy operation with keypad and control knob
- Impulse key for short cycle mode
- 9 program memories for more individuality
- 9 individual acceleration and 10 deceleration stages
- Model 220 R coolable from -20 to +40 °C (with pre-cooling function)

— FIELDS OF APPLICATION

- Hospitals
- Pediatric clinics
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Forensic laboratories
- Molecular diagnostics



Centrifuge packages for the model can be found on [page 50](#)



More information about the control panel can be found on [page 202](#)



according to regulation (EU) 2017/746




TECHNICAL DATA

| | MIKRO 220 non-refrigerated | MIKRO 220 R refrigerated |
|---|--|--|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 Hz |
| consumption | 510 VA | 850 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 48 x 1.5 / 2.0 ml, 6 x 50 ml | 48 x 1.5 / 2.0 ml, 6 x 50 ml |
| max. RPM | 18,000 min ⁻¹ | 18,000 min ⁻¹ |
| max. RCF | 31,514 | 31,514 |
| running time | 1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button) | 1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 330x420x313 mm | 335x650x313 mm |
| weight | approx. 21 kg | approx. 42 kg |
| noise level | ≤ 58 dB (A) with rotor 1189-A | ≤ 59 dB (A) with rotor 1016 |
| temperatur control, infinitely variable | - | from -20 to +40 °C |
| Cat. No. | 2200 | 2205 |
| 100 – 127 V 1 ~ / 60 Hz | 2200-01 | 2205-01 |
| consumption | 510 VA | 950 VA |
| emission, immunity | FCC class B | FCC class B |








*) Other voltages on request.

AVAILABLE ROTORS


SWING-OUT ROTORS

| | angle | max. RPM | max. capacity | Cat. No. | page |
|---|-------|--------------------------|---------------|---------------|------|
|  Swing-out rotor, 24-place | 90° | 13,000 min ⁻¹ | 24 x 2 ml | 1154-L | 47 |

ANGLE ROTOR

| | | | | | |
|---|-----|--------------------------|----------------|---------------|----|
|  Angle rotor, 24-place | 45° | 18,000 min ⁻¹ | 24 x 2 ml | 1195-A | 46 |
|  Angle rotor, 30-place | 45° | 14,000 min ⁻¹ | 30 x 2 ml | 1189-A | 46 |
|  Angle rotor, 48-place | 45° | 14,000 min ⁻¹ | 48 x 2 ml | 1158-L | 47 |
|  Angle rotor, 6-place | 45° | 6,000 min ⁻¹ | 6 x 50 ml | 1016 | 48 |
|  Drum rotor, 6-place | 90° | 13,000 min ⁻¹ | 60 x 2 ml | 1161 | 48 |
|  Angle rotor, 12-place | 35° | 6,000 min ⁻¹ | 12 x 15 ml | 1015 | 49 |
|  Angle rotor, 6-place | 45° | 14,000 min ⁻¹ | 6 x PCR strips | 1160 | 49 |


ANGLE ROTOR, 24-PLACE | 1195-A

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 18,000 min ⁻¹ 31,514 |
| max. capacity | 24 x 2 ml |
| run-up run-down, braked in sec | 26 23 |
| angle | 45° |
| temperature in °C ¹⁾ | +3 |
| Cat. No. | 1195-A |


Lid bioseal ⁵⁾

Cat. No.


INCLUSIVE


| | |
|---|---|
|  | |
| Vessels | |
| capacity in ml | 0.2 0.4 0.5 0.8 1.5 2.0 0.5 |
| Ø x L in mm | 6 x 18 6 x 45 8 x 30 8 x 45 11 x 38 11 x 38 10.7 x 46 |
| max. RCF ²⁾ | 31,514 31,514 31,514 31,514 31,514 31,514 30,065 |
| radius in mm | 87 87 87 87 87 87 83 |
| Cat. No. | microliter tubes Pediatric |



| | |
|---|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 6 x 40 6 x 40 8 x 40 8 x 40 10.2x19.3 11.2x40.8 11.2x39 |
| vessels per rotor | 24 24 24 24 24 24 12 |
| Cat. No. | 2024 2024 2023 2023 2031⁷⁾ - 0788 |


ANGLE ROTOR, 30-PLACE | 1189-A

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 14,000 min ⁻¹ 21,255 |
| max. capacity | 30 x 2 ml |
| run-up run-down, braked in sec | 20 22 |
| angle max. noise level | 45° 58 dB (A) |
| temperature in °C ¹⁾ | +3 |
| Cat. No. | 1189-A |



Lid bioseal ⁵⁾

Cat. No.

INCLUSIVE



| | |
|---|---|
|  | |
| Vessels | |
| capacity in ml | 0.2 0.4 0.5 0.8 1.5 2.0 0.5 |
| Ø x L in mm | 6 x 18 6 x 45 8 x 30 8 x 45 11 x 38 11 x 38 10.7 x 46 |
| max. RCF ²⁾ | 21,255 21,255 21,255 21,255 21,255 21,255 20,379 |
| radius in mm | 97 97 97 97 97 97 93 |
| Cat. No. | microliter tubes Pediatric |



| | |
|---|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 6 x 40 6 x 40 8 x 40 8 x 40 10.2x19.3 11.2x40.9 11.2x39 |
| vessels per rotor | 30 30 30 30 30 30 15 |
| Cat. No. | 2024 2024 2023 2023 2031⁷⁾ - 0788 |

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

— ANGLE ROTOR, 48-PLACE | 1158-L

| | |
|---|--------------------------------|
|  | |
| Rotor | |
| max. RPM | 14,000 min ⁻¹ |
| max. RCF | 21,255 outside / 18,845 inside |
| max. capacity | 48 x 2 ml |
| run-up run-down, braked in sec | 21 22 |
| angle max. noise level | 45° 59 dB (A) |
| temperature in °C ¹⁾ | -4 |
| Cat. No. | 1158-L |




Lid bioseal ⁵⁾
Cat. No.




INCLUSIVE




| | |
|---|---|
|  | |
| Vessels | |
| capacity in ml | 0.2 0.4 0.5 0.8 1.5 2.0 |
| Ø x L in mm | 6 x 18 6 x 45 8 x 30 8 x 45 11 x 38 11 x 38 |
| max. RCF ²⁾ | 21,255 / 18,845 21,255 / 18,845 21,255 / 18,845 21,255 / 18,845 21,255 / 18,845 21,255 / 18,845 |
| radius in mm | 97 / 86 97 / 86 97 / 86 97 / 86 97 / 86 97 / 86 |
| Cat. No. | microliter tubes |



| | |
|---|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 6 x 40 6 x 40 8 x 40 8 x 40 10.2x19.3 11.4 x 39 |
| vessels per rotor | 48 48 48 48 48 48 |
| Cat. No. | 2024 2024 2023 2023 2031⁷⁾ - |

— SWING-OUT ROTOR, 24-PLACE | 1154-L

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 13,000 min ⁻¹ 18,516 |
| max. capacity | 24 x 2 ml |
| run-up run-down, braked in sec | 25 26 |
| angle max. noise level | 90° 60 dB (A) |
| temperature in °C ¹⁾ | -2 |
| Cat. No. | 1154-L |




Lid bioseal ⁵⁾
Cat. No.




INCLUSIVE



| | |
|---|---|
|  | |
| Vessels | |
| capacity in ml | 0.2 0.4 0.5 0.8 1.5 2.0 |
| Ø x L in mm | 6 x 18 6 x 45 8 x 30 8 x 45 11 x 38 11 x 38 |
| max. RCF ²⁾ | 18,516 18,516 18,516 18,516 18,516 18,516 |
| radius in mm | 98 98 98 98 98 98 |
| Cat. No. | microliter tubes |



| | |
|---|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 6 x 40 6 x 40 8 x 40 8 x 40 10.2x19.3 11.5x38.5 |
| vessels per rotor | 24 24 24 24 24 24 |
| Cat. No. | 2024 2024 2023 2023 2031⁷⁾ - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

— ANGLE ROTOR, 6-PLACE | 1016



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 4,025 |
| max. capacity | 6 x 50 ml |
| run-up run-down, braked in sec | 14 17 |
| angle max. noise level | 35° 59 dB (A) |
| temperature in °C ¹⁾ | -20 |
| Cat. No. | 1016 |



Vessels

| | | | | | | | | | | | | | |
|------------------------|---------------------|--------|--------|--------|--------------------------------|--------|---------|----------|-------|----------------------|--------|-------|--------|
| | | | | | | | | | | | | | |
| capacity in ml | 7 | 15 | 25 | 50 | 9-10 | 10 | 1.6–5 | 4–7 | 5 | 15 | 50 | 30 | 50 |
| Ø x L in mm | 12x100 | 17x100 | 24x100 | 34x100 | 16x92 | 15x102 | 13 x 75 | 13 x 100 | 17x59 | 17x120 | 29x115 | 26x95 | 29x107 |
| max. RCF ²⁾ | 3,944 | 3,783 | 3,622 | 4,025 | 3,783 | 3,783 | 2,978 | 3,783 | 3,622 | 3,824 | 3,824 | 3,703 | 3,904 |
| radius in mm | 98 | 94 | 90 | 100 | 94 | 94 | 74 | 94 | 90 | 95 | 95 | 92 | 97 |
| Cat. No. | tubes ²⁾ | | | | blood collection / urine tubes | | | | - | tubes with screw cap | | | |



Adapter

| | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | | |
| boring Ø x L in mm | 13 x 91.5 | 17.5 x 95 | 26 x 88 | 35 x 96 | 17.5 x 95 | 17.5 x 51 | 17.5 x 95 | 17.5 x 95 | 17 x 51 | 17 x 97.8 | 30 x 97.8 | 26 x 88 | 29 x 95 |
| vessels per rotor | 18 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 3 | 6 | 6 |
| Cat. No. | 1632 | 1635 | 1633 | - | 1635 | 1635 | 1635 | 1635 | 1649 | 1631 | 1641 | 1633 | 1634 |

— DRUM ROTOR, 6-PLACE | 1161




Rotor

| | |
|----------------------------------|-----------------------------------|
| max. RPM max. RCF | 13,000 min ⁻¹ 14,171 |
| max. capacity | 60 x 2 ml |
| run-up run-down, braked in sec | 17 18 |
| angle max. noise level | 90° 60 dB (A) |
| temperature in °C ¹⁾ | -3 |
| Cat. No. | 1161 |



Lid

| | |
|-----------------|------------------|
| Cat. No. | INCLUSIVE |
|-----------------|------------------|

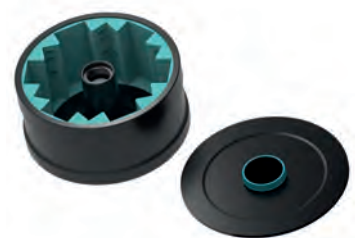

Vessels

| | | | | | | |
|------------------------|-------------------------|--------|--------|--------|---------|---------|
| | | | | | | |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 |
| max. RCF ²⁾ | 14,171 | 14,171 | 14,171 | 14,171 | 14,171 | 14,171 |
| radius in mm | 75 | 75 | 75 | 75 | 75 | 75 |
| Cat. No. | microliter tubes | | | | | |



Adapter

| | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8.4 x 42.5 | 8.4 x 42.5 | 10.8 x 37 | 10.8 x 37 |
| vessels per rotor | 192 | 192 | 126 | 126 | 60 | 60 |
| Cat. No. | 1378 | 1378 | 1379 | 1379 | 1377 | 1377 |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.

— ANGLE ROTOR, 12-PLACE | 1015



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 4,146 |
| max. capacity | 12 x 15 ml |
| run-up run-down, braked in sec | 14 16 |
| angle max. noise level | 35° 60 dB (A) |
| temperature in °C ¹⁾ | -20 |
| Cat. No. | 1015 |



Vessels

| | | | | | | | | | | | | | | |
|------------------------|---------------------|--------------------------------|---------|---------|-------|-------|-------|---------|-------|--------|-------|--------|--------|--------|
| | | | | | | | | | | | | | | |
| capacity in ml | 5 | 15 | 1.1–1.4 | 2.6–3.4 | 2.7–3 | 4.5–5 | 4.9 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 8.5–10 | 15 |
| Ø x L in mm | 12x75 | 17x100 | 8x66 | 13x65 | 11x66 | 11x92 | 13x90 | 15x92 | 16x92 | 15x102 | 13x75 | 13x100 | 16x100 | 17x120 |
| max. RCF ²⁾ | 3,300 | 4,146 | 3,300 | 3,300 | 3,300 | 4,146 | 4,146 | 4,146 | 4,146 | 4,146 | 3,300 | 4,146 | 4,146 | 4,146 |
| radius in mm | 82 | 103 | 82 | 82 | 82 | 103 | 103 | 103 | 103 | 103 | 82 | 103 | 103 | 103 |
| Cat. No. | tubes ²⁾ | blood collection / urine tubes | | | | | | | | | | | | - |



Adapter

| | | | | | | | | | | | | | | |
|--------------------|---------------|-----------|---------------|---------------|---------------|-----------|-----------|-----------|-----------|-----------|---------------|-------------|-----------|-----------|
| | | | | | | | | | | | | | | |
| boring Ø x L in mm | 13.5 x 59 | 17.7 x 88 | 13.5 x 59 | 13.5 x 59 | 13.5 x 59 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 13.5 x 59 | 13.5 x 79 | 17.7 x 88 | 17.7 x 88 |
| vessels per rotor | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 6 |
| Cat. No. | 1054-A | - | 1054-A | 1054-A | 1054-A | - | - | - | - | - | 1054-A | 1058 | - | - |

— ANGLE ROTOR, 6-PLACE | 1160



Rotor

| | |
|---|-----------------------------------|
| max. RPM max. RCF | 14,000 min ⁻¹ 18,845 |
| max. capacity | 6 x 8 PCR strips |
| run up run down, braked in sec | 20 22 |
| angle temperature in °C ¹⁾ | 45° -4 |
| Cat. No. | 1160 |



Lid

| | |
|-----------------|-------------|
| Cat. No. | 1162 |
|-----------------|-------------|



Vessels

| | | |
|------------------------|----------|-------------------|
| | | |
| capacity in ml | 0.2 | 0.2 |
| Ø x L in mm | 6x18 | - |
| max. RCF ²⁾ | 18,845 | 18,845 |
| radius in mm | 86 | 86 |
| Cat. No. | - | PCR strips |



Adapter

| | | |
|--------------------|------------|------------|
| | | |
| boring Ø x L in mm | 6.5 x 15.5 | 6.5 x 15.5 |
| vessels per rotor | 48 | 6 x 8 |
| Cat. No. | - | - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.

PACKAGES

MIKRO 220 MICROLITER TUBES PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|--------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 220 | 2200 | 24 | 0.2 - 2.0 | 11 x 38 | 18,000 | 31,514 |
| - 1 x angle rotor 24-place, incl. lid bioseal | 1195-A | 12 | 0.5 (Pediatric) | 10.7 x 46 | 18,000 | 30,065 |

2200SET1

MIKRO 220 MICROLITER TUBES PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|--------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 220 | 2200 | 30 | 0.2 - 2.0 | 11 x 38 | 14,000 | 21,255 |
| - 1 x angle rotor 30-place, incl. lid bioseal | 1189-A | 15 | 0.5 (Pediatric) | 10.7 x 46 | 14,000 | 20,379 |

2200SET2

MIKRO 220 R MICROLITER TUBES PACKAGE 1


| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|--------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 220 R | 2205 | 24 | 0.2 - 2.0 | 11 x 38 | 18,000 | 31,514 |
| - 1 x angle rotor 24-place, incl. lid bioseal | 1195-A | 12 | 0.5 (Pediatric) | 10.7 x 46 | 18,000 | 30,065 |

2205SET1

MIKRO 220 R MICROLITER TUBES PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---|--------|----------------------|-----------------|-----------|--------|--------|
| - 1 x MIKRO 220 R | 2205 | 30 | 0.2 - 2.0 | 11 x 38 | 14,000 | 21,255 |
| - 1 x angle rotor 30-place, incl. lid bioseal | 1189-A | 15 | 0.5 (Pediatric) | 10.7 x 46 | 14,000 | 20,379 |

2205SET2



DID YOU KNOW?

The Download Center on our website allows you to access the most up to date documents including catalogs, brochures, data sheets and certificates.

Try it now: www.hettichlab.com/downloadcenter



BENCHTOP CENTRIFUGES

Specialists in diversity



ROTOFIX 32 A
on page 52



UNIVERSAL 320 | 320 R
on page 64



ROTINA 380 | 380 R
on page 88

03



ROTINA 420 | 420 R
on page 100



ROTANTA 460 | 460 R
on page 110



ROTOFIX 46 | 46 H
on page 128

ROTOFIX 32 A

Rugged and indispensable

For decades, the ROTOFIX 32 A has set the standard in daily lab routine thanks to its versatility and solid construction. The benchtop centrifuge spins sample volumes up to 4 x 100 ml, 40 blood collection tubes or 8 x 50 ml conical tubes with a simple user interface. Hettich's cytology rotors are compatible with most existing funnel/slide systems and have bio-containment lids.

— FEATURES

- RPM: 500 - 6,000 min⁻¹ – adjustable in increments of 100
- Max. RCF: 4,226
- Max. capacity: 4 x 100 ml / 6 x 85 ml
- Choice of 9 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Easy operation with keypad
- 2 individual deceleration stages

— FIELDS OF APPLICATION

- Hospitals
- Cell culture laboratories
- University / Academic research
- Pharmaceutical laboratories
- Physician's Office Laboratory (POL)



Centrifuge packages for the model can be found on [page 65](#)



More information about the control panel can be found on [page 202](#)

CYTO

Cyto system available for this model. More information on [page 180](#)



according to regulation (EU) 2017/746



TECHNICAL DATA

| ROTOFIX 32 A | |
|--------------------|---|
| voltage *) | 208 – 240 V 1 ~ |
| frequency | 50 – 60 Hz |
| consumption | 300 VA |
| emission, immunity | EN/IEC 61326-1, class B |
| max. capacity | 4 x 100 ml / 6 x 94 ml |
| max. RPM | 6,000 min ⁻¹ |
| max. RCF | 4,226 |
| running time | 1–99 min, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 366x430x257 mm |
| weight | approx. 23 kg |
| noise level | 52 dB (A) with rotor 1628 |
| Cat. No. | 1206 |

100 – 127 V 1 ~ / 50 – 60 Hz *)

emission, immunity






1206-01

FCC class B




*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

| | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|---------------------------|-----------------|-------------------------|---------------|-------------|------|
|  | swing-out rotor, 4-place | 90° | 4,000 min ⁻¹ | 4 x 100 ml | 1624 | 56 |
|  | swing-out rotor, 4-place | 90° | 4,000 min ⁻¹ | 4 x 100 ml | 1324 | 59 |
|  | swing-out rotor, 6-place | 90° | 4,000 min ⁻¹ | 6 x 50 ml | 1619 | 61 |
|  | swing-out rotor, 8-place | 45° | 4,000 min ⁻¹ | 8 x 50 ml | 1617 | 61 |
|  | swing-out rotor, 8-place | 90° | 4,000 min ⁻¹ | 8 x 15 ml | 1611 | 63 |
|  | swing-out rotor, 12-place | 55° / 60° / 80° | 4,000 min ⁻¹ | 12 x 15 ml | 1628 | 63 |

ANGLE ROTORS

| | | | | | | |
|---|-----------------------|-----|-------------------------|------------|--------------|----|
|  | angle rotor, 8-place | 45° | 4,000 min ⁻¹ | 8 x 50 ml | 1418 | 63 |
|  | angle rotor, 6-place | 35° | 6,000 min ⁻¹ | 6 x 85 ml | 1620A | 65 |
|  | angle rotor, 12-place | 35° | 6,000 min ⁻¹ | 12 x 15 ml | 1613 | 65 |

SWING-OUT ROTOR, 4-PLACE | 1624



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,451 |
| max. capacity | 4 x 50 ml |
| run-up run-down, braked in sec | 22 25 |
| angle max. noise level | 90° 55 dB (A) |
| Cat. No. | 1624 |



Vessels

| | | | | | | | | | | | | |
|------------------------|---------|---------|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| capacity in ml | 5 | 5 | 6 | 7 | 9 | 9 | 15 | 15 | 20 | 25 | 45 | 50 |
| Ø x L in mm | 12 x 75 | 12 x 75 | 12 x 82 | 12 x 100 | 14 x 100 | 14 x 100 | 17 x 100 | 17 x 100 | 21 x 100 | 24 x 100 | 31 x 100 | 34 x 100 |
| max. RCF ²⁾ | 2,218 | 2,164 | 2,343 | 2,343 | 2,308 | 2,415 | 2,308 | 2,451 | 2,361 | 2,451 | 2,361 | 2,451 |
| radius in mm | 124 | 121 | 131 | 131 | 129 | 135 | 129 | 137 | 132 | 137 | 132 | 137 |

Cat. No.

tubes³⁾


Carrier

| | | | | | | | | | | | | |
|--------------------|----------------|-------------|----------------|----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12 x 75 | 13.5 x 65 | 12.5 x 71.5 | 12.5 x 71.5 | 14.6 x 74 | 14.6 x 78 | 17.6 x 71.5 | 17.6 x 78 | 21.5 x 74 | 26 x 78 | 32 x 74 | 35 x 78 |
| vessels per rotor | 16 | 68 | 16 | 16 | 20 | 40 | 16 | 28 | 8 | 8 | 4 | 4 |
| Cat. No. | 1369-91 | 1372 | 1369-92 | 1369-92 | 1370 | 1741 | 1369 | 1742 | 1346 | 1745 | 1345 | 1746 |

Vessels

| | | | | | | | | | | |
|------------------------|---------|---------|---------|---------|---------|---------|----------|----------|---------|-------------------|
| capacity in ml | 1.1–1.4 | 2.6–3.4 | 4–5.5 | 4.9 | 1.6–5 | 4–7 | 4–7 | 8.5–10 | 30 | 1–8 |
| Ø x L in mm | 8 x 66 | 13 x 65 | 15 x 75 | 13 x 90 | 13 x 75 | 16 x 75 | 13 x 100 | 16 x 100 | 26 x 95 | simple / multiple |
| max. RCF ²⁾ | 2,415 | 2,325 | 2,325 | 2,451 | 2,325 | 2,325 | 2,451 | 2,451 | 2,451 | 1,646 |
| radius in mm | 135 | 130 | 130 | 137 | 130 | 130 | 137 | 129 | 137 | 92 |

Cat. No.

blood collection / urine vessels

-
| | | | | | | | | | | cyto chambers |


Carrier

| | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|-------------|
| boring Ø x L in mm | 14.6 x 78 | 17.6 x 78 | 17.6 x 78 | 14.6 x 78 | 17.6 x 78 | 17.6 x 78 | 13.5 x 78 | 17.6 x 71.5 | 26 x 78 | - |
| vessels per rotor | 40 | 28 | 28 | 40 | 28 | 28 | 28 | 16 | 8 | 4 |
| Cat. No. | 1741 | 1742 | 1742 | 1741 | 1742 | 1742 | 1739 | 1369⁴⁾ | 1745 | 1660 |

CYTO

Cyto system available for this model.
More information on [page 180](#)



2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.

4) Please remove the spacer.


16) Packed in units of 10 pieces.


20) Vacutainers made of glass may not be used.

— SWING-OUT ROTOR, 4-PLACE | 1624



| | | | |
|---|---------------------------------|--|------|
|  | |  | |
| Rotor | | Bucket | |
| max. RPM max. RCF | 4,000 min ⁻¹ 1,968 | Cat. No. | 1366 |
| max. capacity | 48 x 4 ml | | |
| run-up run-down, braked in sec | 22 25 | | |
| angle max. noise level | 90° 56 dB (A) | | |
| Cat. No. | 1624 | | |





| | |
|---|---|
|  | |
| Vessels | |
| capacity in ml | 1.5 2.0 1 3 4 |
| Ø x L in mm | 11 x 38 11 x 38 6 x 45 10 x 60 12 x 60 |
| max. RCF ²⁾ | 1,968 1,968 1,950 1,932 1,932 |
| radius in mm | 110 110 109 108 108 |
| Cat. No. | microliter tubes Rhesus tubes ²⁾ |

| | |
|---|--|
|  | |
| Adapter | |
| boring Ø x L in mm | 11.5 x 38 11.5 x 38 6.5 x 23 10.5 x 23 12.5 x 44 |
| vessels per rotor | 36 36 120 48 48 |
| Cat. No. | 5277 5277 1357 1327 1326 |

— SWING-OUT ROTOR, 4-PLACE | 1624

| | | | |
|---|---------------------------------|--|------|
|  | |  | |
| Rotor | | Bucket | |
| max. RPM max. RCF | 4,000 min ⁻¹ 2,665 | Lid bioseal ⁵⁾ | 1492 |
| max. capacity | 4 x 100 ml | Cat. No. | 1481 |
| run-up run-down, braked in sec | 22 25 | | |
| angle max. noise level | 90° 55 dB (A) | | |
| Cat. No. | 1624 | | |



| | |
|--|--|
|  | |
| Vessels | |
| capacity in ml | 0,5 1,5 2,0 1 3 5 6 7 9 15 25 50 85 100 |
| Ø x L in mm | 10.7 x 46 11 x 38 11 x 38 6 x 45 10 x 60 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 24 x 100 34 x 100 38 x 101 44 x 100 |
| max. RCF ²⁾ | 2,379 2,451 2,451 2,594 2,630 2,558 2,558 2,558 2,540 2,540 2,433 2,415 2,612 2,558 |
| radius in mm | 133 135 135 145 147 141 141 141 142 142 136 135 146 143 |
| Cat. No. | Pediatric microtubes Rhesus tubes ²⁾ |
|  | |
| Adapter | |
| boring Ø x L in mm | 11.2 x 38 11.2 x 38 11.2 x 38 6.5 x 34 10.5 x 43 13.4 x 48 13.4 x 48 13.4 x 48 17.6 x 89 17.6 x 89 25.2 x 77 35.2 x 77 38.5 x 92 45.9 x 98 |
| vessels per rotor | 20 20 20 108 36 20 20 20 16 16 4 4 4 4 |
| Cat. No. | 1351 1351 1351 1339 1343 1383 1383 1383 1329 1329 1330 1331 1396 0761 |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by TÜV in conformity with DIN EN 61010, section 2-020.

SWING-OUT ROTOR, 4-PLACE | 1624


Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,665 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 22 25 |
| angle max. noise level | 90° 55 dB (A) |
| Cat. No. | 1624 |



Bucket

| | |
|---------------------------|-------------|
| Lid bioseal ⁵⁾ | 1492 |
| Cat. No. | 1481 |



Vessels


| | | | | | | | | | | | | | | | |
|------------------------|---|---------|------------|------------|---------|----------|-------------|-------------|-----------------------------|----------|----------|---------|----------|----------|---------|
| capacity in ml | 1.1–1.4 | 2.7–3 | 2.6–4.9 | 4–8.5 | 9–10 | 10 | 1.6–7 | 4–10 | 15 | 50 | 12 | 25 | 30 | 50 | 10 |
| Ø x L in mm | 8 x 66 | 11 x 66 | 13 x 65/90 | 15 x 75/92 | 16 x 92 | 15 x 102 | 13 x 75/100 | 16 x 75/100 | 17 x 120 | 29 x 115 | 17 x 100 | 25 x 90 | 25 x 110 | 29 x 115 | 16 x 80 |
| max. RCF ²⁾ | 2,540 | 2,558 | 2,558 | 2,576 | 2,540 | 2,665 | 2,558 | 2,522 | 2,665 | 2,665 | 2,665 | 2,343 | 2,665 | 2,665 | 2,522 |
| radius in mm | 142 | 143 | 143 | 144 | 142 | 149 | 143 | 141 | 149 | 149 | 149 | 131 | 149 | 149 | 141 |
| Cat. No. | blood collection / urine vessels | | | | | | | | tubes with screw cap | | | | | | |

Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 9 x 49 | 13.4 x 48 | 13.4 x 48 | 15.6 x 47 | 17.6 x 91 | 17.6 x 91 | 13.4 x 48 | 16.5 x 56 | 17 x 90 | 30 x 90 | 17 x 80 | 26 x 72 | 26 x 80 | 29.5 x 80 | 16.5 x 56 |
| vessels per rotor | 28 | 20 | 20 | 16 | 16 | 16 | 20 | 16 | 4 | 4 | 4 | 4 | 4 | 4 | 16 |
| Cat. No. | 1457 | 1383 | 1383 | 1459 | 1329 | 1329⁴⁾ | 1383 | 1348 | 1347 | 1384 | 6311 | 1363 | 1365 | 6318 | 1348 |

Vessels


| | | | | |
|------------------------|-----------------------------|----------|----------|--------------------------|
| capacity in ml | 30 | 50 | 85 | 30 |
| Ø x L in mm | 26 x 95 | 29 x 107 | 38 x 106 | 44 x 105 |
| max. RCF ²⁾ | 2,451 | 2,630 | 2,612 | 2,540 |
| radius in mm | 137 | 147 | 146 | 142 |
| Cat. No. | tubes with screw cap | | | 0534⁶⁾ |



chrome bath tubes

Adapter


| | | | | |
|--------------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 26 x 83 | 29 x 93 | 38.5 x 92 | 45.9 x 98 |
| vessels per rotor | 4 | 4 | 4 | 4 |
| Cat. No. | 4417 | 4416 | 1396 | 0765 |



Spacer


- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 1490 cannot be closed with lid 1492.
- Please remove spacer.
- Tested by TÜV in conformity with DIN EN 61010, section 2-020.
- A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.


SWING-OUT ROTOR, 4-PLACE | 1324


| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,000 min ⁻¹ 2,630 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 27 30 |
| angle max. noise level | 90° 55 dB (A) |
| Cat. No. | 1324 |


| | |
|--|-------------|
|  | |
| Bucket | |
| Lid bioseal ⁵⁾ | 1492 |
| Cat. No. | 1490 |





| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 0.5 1.5 2.0 1 3 4 5 6 7 9 15 25 50 85 100 |
| Ø x L in mm | 10.7x46 11x38 11x38 6x45 10x60 10x88 12x75 12x82 12x100 14x100 17x100 24x100 34x100 38x101 44x100 |
| max. RCF ²⁾ | 2,343 2,415 2,415 2,558 2,594 2,594 2,522 2,522 2,522 2,504 2,504 2,397 2,379 2,576 2,522 |
| radius in mm | 131 135 135 143 145 145 141 141 141 140 140 134 133 144 141 |
| Cat. No. | Pediatric microliter tubes Rhesus tubes²⁾ |

| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 11.2x38 11.2x38 11.2x38 6.5x34 10.5x43 10.5x43 13.4x48 13.4x48 13.4x48 17.6x91 17.6x91 25.2x87 35.2x87 38.5x92 45.9x100.5 |
| vessels per rotor | 20 20 20 108 36 36 20 20 20 16 16 4 4 4 4 |
| Cat. No. | 1351 1351 1351 1339 1343 1343 1383 1383 1383 1329 1329 1330 1331 1396 0761 |

| | |
|--|--|
|  | |
| Vessels | |
| capacity in ml | 1.1–1.4 2.6–3.4 4.9 2.7–3 4.5–5 4–5.5 7.5–8.2 9–10 10 1.6–5 4–7 4–7 8.5–10 15 |
| Ø x L in mm | 8 x 66 13x65 13x90 11x66 11x92 15x75 15x92 16x92 15x102 13x75 13x100 16x75 16x100 17x120 |
| max. RCF ²⁾ | 2,540 2,522 2,522 2,522 2,522 2,540 2,540 2,504 2,630 2,522 2,522 2,486 2,486 2,630 |
| radius in mm | 142 141 141 141 141 142 142 140 147 141 141 139 139 147 |
| Cat. No. | blood collection / urine vessels - |

| | |
|--|--|
|  | |
| Adapter | |
| boring Ø x L in mm | 9x47 13.4x45 13.4x45 13.4x45 13.4x45 15.6x47 15.6x47 17.6x91 17.6x91 13.4x45 13.4x45 16.5x56 16.5x56 17x90 |
| vessels per rotor | 28 20 20 20 20 16 16 16 16 20 20 16 16 4 |
| Cat. No. | 1457 1383 1383 1383 1383 1459 1459 1329 1329⁴⁾ 1383 1383 1348 1348 1347 |

| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 15 50 12 25 30 50 10 30 50 85 30 |
| Ø x L in mm | 17x120 29 x 115 17 x 100 25 x 90 25 x 110 29 x 115 16 x 80 26 x 95 29x107 38x106 44x105 |
| max. RCF ²⁾ | 2,630 2,630 2,630 2,308 2,630 2,630 2,486 2,415 2,594 2,576 2,504 |
| radius in mm | 147 147 147 129 147 147 139 135 145 144 140 |
| Cat. No. | tubes with screw cap 0534⁶⁾ |

| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 17x107 30x90 17x80 26x72 26x80 29.5x80 16.5x56 26x83 29x93 38.5x92 45.9x100.5 |
| vessels per rotor | 12 4 4 4 4 4 16 4 4 4 4 |
| Cat. No. | 1356 1384 6311 1363 1365 6318 1348 4417 4416 1396 0765 |

SWING-OUT ROTOR, 4-PLACE | 1324

Rotor

| | |
|----------------------------------|--------------------------------|
| max. RPM max. RCF | 4,000 min ¹ 2,612 |
| max. capacity | 4 x 50 ml |
| run-up run-down, braked in sec | 27 30 |
| angle | 90° 56 dB (A) |
| Cat. No. | 1324 |



Bucket

| | |
|----------|------|
| Cat. No. | 1398 |
|----------|------|




Vessels

| | | | | | | | | | | | | | | |
|------------------------|---------------------|-------|--------|--------|--------|----------------------------------|-------|-------|-------|-------|--------|-------|--------|-------|
| capacity in ml | 5 | 6 | 7 | 9 | 15 | 2.6–3.4 | 2.7–3 | 4.5–5 | 4.9 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 |
| Ø x L in mm | 12x75 | 12x82 | 12x100 | 14x100 | 17x100 | 13x65 | 11x66 | 11x92 | 13x90 | 16x92 | 15x102 | 13x75 | 13x100 | 16x75 |
| max. RCF ²⁾ | 2,486 | 2,486 | 2,486 | 2,522 | 2,522 | 2,486 | 2,486 | 2,486 | 2,486 | 2,522 | 2,522 | 2,486 | 2,486 | 2,397 |
| radius in mm | 139 | 139 | 139 | 141 | 141 | 139 | 139 | 139 | 139 | 141 | 141 | 139 | 139 | 134 |
| Cat. No. | tubes ²⁾ | | | | | blood collection / urine vessels | | | | | | | | |




Adapter

| | | | | | | | | | | | | | | |
|--------------------|-----------|-----------|-----------|---------|---------|-----------|-----------|-----------|-----------|---------|---------|-----------|-----------|---------|
| boring Ø x L in mm | 13.4x57.5 | 13.4x57.5 | 13.4x57.5 | 17.5x81 | 17.5x81 | 13.4x57.5 | 13.4x57.5 | 13.4x57.5 | 13.4x57.5 | 17.5x81 | 17.5x81 | 13.4x57.5 | 13.4x57.5 | 17.5x81 |
| vessels per rotor | 20 | 20 | 20 | 16 | 16 | 20 | 20 | 20 | 20 | 16 | 16 | 20 | 20 | 16 |
| Cat. No. | 1486 | 1486 | 1486 | 1482A | 1482A | 1486 | 1486 | 1486 | 1486 | 1482A | 1482A | 1486 | 1486 | 1482A |



Vessels

| | | | | |
|------------------------|----------------------|----------|----------|----------|
| capacity in ml | 15 | 50 | 12 | 50 |
| Ø x L in mm | 17 x 120 | 29 x 115 | 17 x 100 | 29 x 115 |
| max. RCF ²⁾ | 2,612 | 2,576 | 2,522 | 2,576 |
| radius in mm | 146 | 144 | 141 | 144 |
| Cat. No. | tubes with screw cap | | | |



Adapter

| | | | | |
|--------------------|--------|-------|---------|--------------------|
| boring Ø x L in mm | 17x100 | 30x98 | 17.5x81 | 30x98 |
| vessels per rotor | 16 | 4 | 16 | 4 |
| Cat. No. | 1483A | 1484 | 1482A | 1484 ⁴⁾ |



2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.

The max. RCF for glass tubes annotated with footnote 2) is 4,000.

4) Please remove spacer.

— SWING-OUT ROTOR, 6-PLACE | 1619




Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,701 |
| max. capacity | 6 x 50 ml |
| run-up run-down, braked in sec | 22 25 |
| angle max. noise level | 90° 54 dB (A) |
| Cat. No. | 1619 |



Vessels

| | | |
|------------------------|-----------------------------|----------|
| capacity in ml | 15 | 50 |
| Ø x L in mm | 17 x 120 | 29 x 115 |
| max. RCF ²⁾ | 2,701 | 2,701 |
| radius in mm | 151 | 151 |
| Cat. No. | tubes with screw cap | |



Adapter

| | | |
|--------------------|---------------|-----------|
| boring Ø x L in mm | 17 x 84 | 30 x 87.5 |
| vessels per rotor | 6 | 6 |
| Cat. No. | 1462-A | - |



— SWING-OUT ROTOR, 8-PLACE | 1617




Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,469 |
| max. capacity | 8 x 50 ml |
| run-up run-down, braked in sec | 22 25 |
| angle max. noise level | 45° 53 dB (A) |
| Cat. No. | 1617 |



Vessels

| | | |
|------------------------|-----------------------------|----------|
| capacity in ml | 15 | 50 |
| Ø x L in mm | 17 x 120 | 29 x 115 |
| max. RCF ²⁾ | 2,469 | 2,469 |
| radius in mm | 138 | 138 |
| Cat. No. | tubes with screw cap | |



Adapter

| | | |
|--------------------|---------------|-----------|
| boring Ø x L in mm | 17 x 84 | 30 x 94.5 |
| vessels per rotor | 8 | 8 |
| Cat. No. | 1462-A | - |



2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 8-PLACE | 1611



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,415 |
| max. capacity | 8 x 15 ml |
| run-up run-down, braked in sec | 22 25 |
| angle max. noise level | 90° 53 dB (A) |
| Cat. No. | 1611 |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---------------------|-------|--------|--------|--------|----------------------------------|-------|-------|-------|---------|-------|--------|-------|--------|--|
| | | | | | | | | | | | | | | | |
| capacity in ml | 5 | 6 | 7 | 10 | 15 | 2.6–3.4 | 2.7–3 | 4–5.5 | 4.5–5 | 7.5–8.2 | 1.6–5 | 4–7 | 4–7 | 8.5–10 | |
| Ø x L in mm | 12/13x75 | 12x82 | 12x100 | 13x100 | 17x100 | 13x65 | 11x66 | 15x75 | 11x92 | 15x92 | 13x75 | 13x100 | 16x75 | 16x100 | |
| max. RCF ²⁾ | 1,914 | 1,914 | 2,415 | 2,415 | 2,415 | 1,914 | 1,914 | 1,914 | 2,415 | 2,415 | 1,914 | 2,415 | 1,914 | 2,415 | |
| radius in mm | 107 | 107 | 135 | 135 | 135 | 107 | 107 | 107 | 135 | 135 | 107 | 135 | 107 | 135 | |
| Cat. No. | tubes ²⁾ | | | | | blood collection / urine vessels | | | | | | | | | |



Bucket

| | | | | | | | | | | | | | | |
|--------------------|---------------|---------------|-------------|-------------|-------------|---------------|---------------|---------------|-------------|-------------|---------------|-------------|---------------|-------------|
| | | | | | | | | | | | | | | |
| boring Ø x L in mm | 13x53 | 13x53 | 13.2x81 | 13.2x81 | 17.5x81 | 13 x 53 | 13 x 53 | 17.5 x 53 | 13.2 x 81 | 17.5 x 81 | 13 x 53 | 13.2 x 81 | 17.5 x 53 | 17.5 x 81 |
| vessels per rotor | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Cat. No. | 1131-A | 1131-A | 1643 | 1643 | 1644 | 1131-A | 1131-A | 1132-A | 1643 | 1644 | 1131-A | 1643 | 1132-A | 1644 |

SWING-OUT ROTOR, 12-PLACE | 1628



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,683 |
| max. capacity | 12 x 15 ml |
| run-up run-down, braked in sec | 22 25 |
| angle max. noise level | 55° / 60° / 80° 52 dB (A) |
| Cat. No. | 1628 |



Vessels

| | | | | | | | | | |
|------------------------|---------------------------|--------|---|-------|-------|---------|-------|-------|--------|
| | | | | | | | | | |
| capacity in ml | 5 | 15 | 2.6–3.4 | 2.7–3 | 4–5.5 | 7.5–8.2 | 1.6–5 | 4–7 | 8.5–10 |
| Ø x L in mm | 12/13x75 | 17x100 | 13x65 | 11x66 | 15x75 | 15x92 | 13x75 | 16x75 | 16x100 |
| max. RCF ²⁾ | 2,236 | 2,683 | 2,236 | 2,236 | 2,254 | 2,683 | 2,236 | 2,254 | 2,683 |
| radius in mm | 125 | 150 | 125 | 125 | 126 | 150 | 125 | 126 | 150 |
| Cat. No. | tubes²⁾ | | blood collection / urine vessels | | | | | | |



Bucket

| | | | | | | | | | |
|--------------------|---------------|-------------|---------------|---------------|-------------|-------------|---------------|-------------|-------------|
| | | | | | | | | | |
| boring Ø x L in mm | 13.2x53 | 17.5x79 | 13.2x53 | 13.2x53 | 17.5x53 | 17.5x79 | 13.2x53 | 17.5x53 | 17.5x79 |
| vessels per rotor | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| Cat. No. | 1127-A | 1621 | 1127-A | 1127-A | 1122 | 1621 | 1127-A | 1122 | 1621 |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 8-PLACE | 1418



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,612 |
| max. capacity | 8 x 50 ml |
| run-up run-down, braked in sec | 36 43 |
| angle max. noise level | 45° 53 dB (A) |
| Cat. No. | 1418 |



Vessels

| | | | | | | | | | | | | |
|------------------------|---------|----------|---------|---------|---------|---------|---------|----------|----------|----------|----------|----------|
| | | | | | | | | | | | | |
| capacity in ml | 5 | 12 | 1.1–1.4 | 2.6–3.4 | 2.7–3 | 9 – 10 | 1.6 – 5 | 15 | 50 | 15 | 50 | 50 |
| Ø x L in mm | 12 x 75 | 17 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 16 x 92 | 13 x 75 | 17 x 120 | 29 x 115 | 17 x 100 | 29 x 115 | 29 x 107 |
| max. RCF ²⁾ | 2,182 | 2,540 | 2,182 | 2,182 | 2,182 | 2,540 | 2,182 | 2,594 | 2,486 | 2,540 | 2,486 | 2,486 |
| radius in mm | 122 | 142 | 122 | 122 | 122 | 142 | 122 | 145 | 139 | 142 | 139 | 139 |

| Cat. No. | tubes ²⁾ | | blood collection / urine vessels | | | | tubes with screw cap | | | | | |
|--------------------|---------------------|-------------|----------------------------------|-------------|-------------|-------------|----------------------|-------------|-------------|-------------|-------------|-------------|
| | + 1054-A | + 0716 | + 1054-A | + 1054-A | + 1054-A | + 0716 | + 1054-A | + E2109 | + E2110-A | + 0716 | | |
| | | | | | | | | | | | | |
| boring Ø x L in mm | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 30.2 x 92 | 17.4 x 91 | 30.2 x 92 | 30.2 x 92 |
| vessels per rotor | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 8 | 32 | 8 | 8 |
| Cat. No. | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1468 | 1467 | 1468 | 1468 |



Carrier

| | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 30.2 x 92 | 17.4 x 91 | 30.2 x 92 | 30.2 x 92 |
| vessels per rotor | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 8 | 32 | 8 | 8 |
| Cat. No. | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1468 | 1467 | 1468 | 1468 |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

ANGLE ROTOR, 6-PLACE | 1620A



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 4,226 |
| max. capacity | 6 x 85 ml |
| run-up run-down, braked in sec | 19 22 |
| angle max. noise level | 35° 53 dB (A) |
| Cat. No. | 1620A |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|-----------|------------------|---------|---------|---------------------|----------|----------|----------------------------------|---------|----------|----------|----------------------|----------|----------|---------|
| | | | | | | | | | | | | | | | |
| capacity in ml | 0.5 | 1.5 | 2.0 | 3 | 15 | 50 | 94 | 7.5 – 8.2 | 9 – 10 | 10 | 8.5 – 10 | 15 | 50 | 50 | 10 |
| Ø x L in mm | 10.7 x 46 | 11 x 38 | 11 x 38 | 10 x 60 | 17 x 100 | 34 x 100 | 38 x 102 | 15 x 92 | 16 x 92 | 15 x 102 | 16 x 100 | 17 x 120 | 29 x 115 | 29 x 115 | 16 x 80 |
| max. RCF ²⁾ | 4,105 | 4,105 | 4,105 | 4,105 | 3,904 | 4,146 | 4,226 | 3,904 | 3,904 | 3,904 | 3,904 | 3,985 | 3,985 | 3,985 | 3,904 |
| radius in mm | 102 | 102 | 102 | 102 | 97 | 103 | 105 | 97 | 97 | 97 | 97 | 99 | 99 | 99 | 97 |
| Cat. No. | Pediatric | microliter tubes | | | tubes ²⁾ | | | blood collection / urine vessels | | | | tubes with screw cap | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 11.4 x 39 | 11.4 x 39 | 11.4 x 39 | 11.4 x 39 | 17.5 x 91.5 | 35 x 89.3 | 38.6 x 90.2 | 17.5 x 91.5 | 17.5 x 91.5 | 17.5 x 91.5 | 17.5 x 91.5 | 17 x 106 | 29.8 x 96.7 | - | 16.5 x 74 |
| vessels per rotor | 24 | 24 | 24 | 24 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 3 | 6 | 12 |
| Cat. No. | 1449 | 1449 | 1449 | 1449 | 1451 | 1463 | - | 1451 | 1451 | 1451 | 1451 | 1466 | 1454 | 1646⁸⁾ | 1448 |

Vessels

| | | | |
|------------------------|-----------------------------|----------|----------|
| | | | |
| capacity in ml | 30 | 50 | 85 |
| Ø x L in mm | 26 x 95 | 29 x 107 | 38 x 106 |
| max. RCF ²⁾ | 3,824 | 4,025 | 4,226 |
| radius in mm | 95 | 100 | 105 |
| Cat. No. | tubes with screw cap | | |



Adapter

| | | | |
|--------------------|-------------|-------------|-------------|
| | | | |
| boring Ø x L in mm | 26 x 85 | 29 x 92 | 38.6 x 90.2 |
| vessels per rotor | 6 | 6 | 6 |
| Cat. No. | 1447 | 1446 | - |


2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

8) Adapter (Set), 6-place: for conical 50 ml tubes with screw cap.

— ANGLE ROTOR, 12-PLACE | 1613

Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 4,146 |
| max. capacity | 12 x 15 ml |
| run-up run-down, braked in sec | 13 15 |
| angle max. noise level | 35° 55 dB (A) |
| Cat. No. | 1613 |



Vessels

| | | | | | | | | | | | | | |
|------------------------|------------------|---------------------------|------------|---------|----------|---|---------|---------|---------|---------|---------|---------|----------|
| | | | | | | | | | | | | | |
| capacity in ml | 0.5 | 4 | 5 | 6 | 15 | 1.1–1.4 | 2.6–3.4 | 2.7–3 | 4.5–5 | 4.9 | 7.5–8.2 | 9–10 | 10 |
| Ø x L in mm | 10.7 x 46 | 10 x 88 | 12/13 x 75 | 12 x 82 | 17 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 15 x 102 |
| max. RCF ²⁾ | 2,777 | 3,502 | 3,300 | 3,300 | 4,146 | 3,300 | 3,300 | 3,300 | 4,146 | 4,146 | 4,146 | 4,146 | 4,146 |
| radius in mm | 69 | 87 | 82 | 82 | 103 | 82 | 82 | 82 | 103 | 103 | 103 | 103 | 103 |
| Cat. No. | Pediatric | tubes²⁾ | | | | blood collection / urine vessels | | | | | | | |



Adapter

| | | | | | | | | | | | | |
|--------------------|----------------------------|-------------|---------------|---------------|-----------|---------------|---------------|---------------|-----------|-----------|-----------|-----------|
| | | | | | | | | | | | | |
| boring Ø x L in mm | 11 x 35 | 11.5 x 67.5 | 13.5 x 60 | 13.5 x 60 | 17.7 x 88 | 13.5 x 60 | 13.5 x 60 | 13.5 x 60 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 |
| vessels per rotor | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| Cat. No. | 2 x 1063-6 (6 pcs.) | 6305 | 1054-A | 1054-A | - | 1054-A | 1054-A | 1054-A | - | - | - | - |

Vessels

| | | | | |
|------------------------|---|----------|----------|----------|
| | | | | |
| capacity in ml | 1.6–5 | 8 | 8.5–10 | 15 |
| Ø x L in mm | 13 x 75 | 16 x 125 | 16 x 100 | 17 x 120 |
| max. RCF ²⁾ | 3,300 | 4,146 | 4,146 | 4,146 |
| radius in mm | 82 | 103 | 103 | 103 |
| Cat. No. | blood collection / urine vessels | | - | |



Adapter


| | | | | |
|--------------------|---------------|-----------|-----------|-----------|
| | | | | |
| boring Ø x L in mm | 13.5 x 60 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 |
| vessels per rotor | 12 | 6 | 12 | 6 |
| Cat. No. | 1054-A | - | - | - |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— PACKAGES

ROTOFIX 32 A BLOOD TUBE PACKAGE 1*

| ROTOFIX 32 A BLOOD TUBE PACKAGE 1* | number of vessels | volume (ml) | size (mm) | RPM | RCF | |
|------------------------------------|-------------------|-------------|-----------|---------------|-------|-------|
| - 1 x ROTOFIX 32 A centrifuge | 1206 | 20 | 1.6 - 7 | 13 x 90 / 100 | 4,000 | 2,558 |
| - 1 x swing-out rotor, 4-place | 1624 | 16 | 4 - 10 | 16 x 75 / 100 | 4,000 | 2,522 |
| - 4 x bucket | 1481 | | | | | |
| - 4 x lid (bioseal) | 1492 | | | | | |
| - 4 x adapter, 5-place | 1383 | | | | | |
| - 4 x adapter, 4-place | 1348 | | | | | |
| 1206SET1 | | | | | | |



ROTOFIX 32 A

Rugged and indispensable

The ruggedly built ROTOFIX 32 A benchtop centrifuge is a medical device used for separating whole blood or blood components of human origin, for example to obtain platelet-rich plasma for autologous therapies. The ROTOFIX 32 A delivers convincing performance thanks to its high capacity and the versatility of its rotor selection.

— FEATURES

- RPM: 500 - 6,000 min⁻¹ – adjustable in increments of 100
- Max. RCF: 3,904
- Max. capacity: 8 x 50 ml
- Choice of 9 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Easy operation with keypad
- 2 individual deceleration stages

— FIELDS OF APPLICATION

- Hospitals
- medical practices
- Dental surgeries
- Orthopedic practices



More information about the control panel can be found on [page 202](#)



* If you use special PRP kits, please contact us: info@hettichlab.com

TECHNICAL DATA

| ROTOFIX 32 A | |
|--------------------|---|
| voltage *) | 208 – 240 V 1 ~ |
| frequency | 50 – 60 Hz |
| consumption | 300 VA |
| emission, immunity | EN/IEC 61326-1, class B |
| max. capacity | 8 x 50 ml |
| max. RPM | 6,000 min ⁻¹ |
| max. RCF | 3,904 |
| running time | 1–99 min, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 366x430x257 mm |
| weight | approx. 23 kg |
| noise level | 53 dB (A) with rotor 1418 |
| Cat. No. | 1207 |

100 – 127 V 1 ~ / 50 – 60 Hz *)

emission, immunity



1206-01

FCC class B



*) Other voltages on request.

AVAILABLE ROTORS


SWING-OUT ROTORS

| | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|--------------------------|-------|-------------------------|---------------|-------------|------|
|  | swing-out rotor, 4-place | 90° | 4,000 min ⁻¹ | 16 x 10 ml | 1624 | 68 |
|  | swing-out rotor, 4-place | 90° | 4,000 min ⁻¹ | 16 x 10 ml | 1324 | 68 |

ANGLE ROTORS


| | | | | | | |
|---|----------------------|-----|-------------------------|-----------|--------------|----|
|  | angle rotor, 8-place | 45° | 4,000 min ⁻¹ | 8 x 50 ml | 1418 | 69 |
|  | angle rotor, 6-place | 35° | 6,000 min ⁻¹ | 6 x 10ml | 1620A | 69 |


SWING-OUT ROTOR, 4-PLACE | 1624

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,000 min ⁻¹ 2,665 |
| max. capacity | 16 x 10 ml |
| run-up run-down, braked in sec | 22 25 |
| angle max. noise level | 90° 55 dB (A) |
| Cat. No. | 1624 |


| | |
|--|-------------|
|  | |
| Bucket | |
| Lid bioseal ⁵⁾ | 1492 |
| Cat. No. | 1481 |




| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 4–5.5 4.5–5 4.9 7.5–8.2 7.5–8.2 9–10 10 8.5–10 20 |
| Ø x L in mm | 15 x 75 11 x 92 13 x 90 15 x 92 15 x 92 16 x 92 15 x 102 16 x 100 31 x 97 |
| max. RCF ²⁾ | 2,576 2,558 2,558 2,576 2,576 2,540 2,665 2,451 2,308 |
| radius in mm | 144 143 143 142 142 142 149 137 137 |
| Cat. No. | tubes / kits |


| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 15.6 x 47 13.4 x 48 13.4 x 48 15.6 x 47 17.6 x 91 17.6 x 91 17.6 x 91 17.6 x 71.5 31 x 85 |
| vessels per rotor | 16 20 20 16 16 16 16 16 4 |
| Cat. No. | 1459 1383 1383 1459 1329 1329 1329 1369⁴⁾ 1309 |


SWING-OUT ROTOR, 4-PLACE | 1324

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,000 min ⁻¹ 2,630 |
| max. capacity | 16 x 10 ml |
| run-up run-down, braked in sec | 27 30 |
| angle max. noise level | 90° 55 dB (A) |
| Cat. No. | 1324 |

| | |
|---|-------------|
|  | |
| Bucket | |
| Lid bioseal ⁵⁾ | 1492 |
| Cat. No. | 1490 |



| | |
|---|--|
|  | |
| Vessels | |
| capacity in ml | 1.1–1.4 2.6–3.4 4.9 2.7–3 4.5–5 4–5.5 7.5–8.2 9–10 |
| Ø x L in mm | 8 x 66 13 x 65 13 x 90 11 x 66 11 x 92 15 x 75 15 x 92 16 x 92 |
| max. RCF ²⁾ | 2,540 2,522 2,522 2,522 2,522 2,540 2,540 2,504 |
| radius in mm | 142 141 141 141 141 142 142 140 |
| Cat. No. | tubes / kits |

| | |
|---|--|
|  | |
| Adapter | |
| boring Ø x L in mm | 9 x 47 13.4 x 48 13.4 x 48 13.4 x 48 13.4 x 48 15.6 x 47 15.6 x 47 17.6 x 91 |
| vessels per rotor | 28 20 20 20 20 16 16 16 |
| Cat. No. | 1457 1383 1383 1383 1383 1459 1459 1329 |

- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
- 5) Tested by TÜV in conformity with DIN EN 61010, section 2-020.

— ANGLE ROTOR, 8-PLACE | 1418



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,683 |
| max. capacity | 8 x 50 ml |
| run-up run-down, braked in sec | 36 43 |
| angle max. noise level | 45° 53 dB (A) |
| Cat. No. | 1418 |



Vessels

| | | | | | | |
|------------------------|---------|---------|---------|---------|---------|----------|
| | | | | | | |
| capacity in ml | 1.1–1.4 | 2.6–3.4 | 2.7–3 | 9–10 | 1.6–5 | 10 |
| Ø x L in mm | 8 x 66 | 13 x 65 | 11 x 66 | 16 x 92 | 13 x 75 | 16 x 100 |
| max. RCF ²⁾ | 2,182 | 2,182 | 2,182 | 2,540 | 2,182 | 2,683 |
| radius in mm | 122 | 122 | 122 | 142 | 122 | 150 |

| Cat. No. | tubes / kits | | | | | | |
|--------------------|--------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | + 1054-A | + 1054-A | + 1054-A | + 0716 | + 1054-A | + 0716 | + E2110-A |
| | | | | | | | |
| Carrier | | | | | | | |
| boring Ø x L in mm | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 17.4 x 91 | 30.2 x 92 |
| vessels per rotor | 32 | 32 | 32 | 32 | 32 | 32 | 8 |
| Cat. No. | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1468 |

— ANGLE ROTOR, 6-PLACE | 1620A



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 3,904 |
| max. capacity | 6 x 10 ml |
| run-up run-down, braked in sec | 19 22 |
| angle max. noise level | 35° 53 dB (A) |
| Cat. No. | 1620A |



Vessels

| | | | | |
|------------------------|---------|---------|----------|----------|
| | | | | |
| capacity in ml | 7.5–8.2 | 9–10 | 10 | 8.5–10 |
| Ø x L in mm | 15 x 92 | 16 x 92 | 15 x 102 | 16 x 100 |
| max. RCF ²⁾ | 3,904 | 3,904 | 3,904 | 3,904 |
| radius in mm | 97 | 97 | 97 | 97 |

| Cat. No. | tubes / kits | | | |
|--------------------|--------------|-------------|-------------|-------------|
| | | | | |
| Adapter | | | | |
| boring Ø x L in mm | 17.5 x 92 | 17.5 x 92 | 17.5 x 92 | 17.5 x 92 |
| vessels per rotor | 6 | 6 | 6 | 6 |
| Cat. No. | 1451 | 1451 | 1451 | 1451 |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.

UNIVERSAL 320 | 320 R

A universal choice

The UNIVERSAL 320 is a compact, versatile and indispensable general purpose centrifuge. Excellent performance and a comprehensive range of accessories enable the UNIVERSAL 320 to carry out virtually any centrifuging tasks including plates, blood tubes, cell culture, microliter and cytology. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (UNIVERSAL 320 R).

— FEATURES

- RPM: 500 - 16,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 24,900
- Max. capacity: 4 x 200 ml / 6 x 94 ml
- The universal choice among the benchtop centrifuges
- Choice of 18 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Noise level of 48 dB(A) with angle rotor 1611
- Easy operation with keypad and control knob
- Impulse key for short cycle mode
- 9 program memories
- 9 individual acceleration and 10 deceleration stages
- Model 320 R coolable from -20 to +40 °C (with pre-cooling function)

— FIELDS OF APPLICATION

- Small laboratories
- Hospitals
- Cell Culture laboratories
- University / Academic research
- Pharmaceutical laboratories
- Food analyzing laboratories
- Physicians Office Lab (POL)



Centrifuge packages for the model can be found on [page 92](#)



More information about the control panel can be found on [page 202](#)

CYTO

Cyto system available for this model. More information on [page 180](#)



according to regulation (EU) 2017/746



UNIVERSAL 320



UNIVERSAL 320 R

TECHNICAL DATA

| | UNIVERSAL 320 non-refrigerated | UNIVERSAL 320 R refrigerated |
|--|---|---|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 – 60 Hz 60 Hz |
| consumption | 400 VA | 800 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 4 x 200 ml / 6 x 94 ml | 4 x 200 ml / 6 x 94 ml |
| max. RPM | 16,000 min ⁻¹ | 16,000 min ⁻¹ |
| max. RCF | 24,900 | 24,900 |
| running time | 1sec – 99 min: 59 sec, ∞ continuous run, short cycle mode (impulse button) | 1sec – 99 min: 59 sec, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 401 x 529 x 346 mm | 407 x 698 x 346 mm |
| weight | approx. 31 kg | approx. 52 kg |
| noise level | 48 dB (A) with rotor 1611 | 50 dB (A) with rotor 1611 |
| temperature control, infinitely variable | - | from -20 to +40 °C |
| Cat. No. | 1401 | 1406 |
| 100 – 127 V 1 ~ / 50–60 Hz *) | 1401-01 | 1406-01 |
| consumption | 400 VA | 950 VA |
| emission, Immunity | FCC class B | FCC class B |

*) Other voltages on request.

AVAILABLE ROTORS

| SWING-OUT ROTORS | angle | max. RPM | max. capacity | Cat. No. | page |
|----------------------------|-----------------|--------------------------|---------------|-------------|------|
| swing-out rotor, 4-places | 90° | 4,500 min ⁻¹ | 4x200 ml | 1554 | 72 |
| swing-out rotor, 4-places | 90° | 5,000 min ⁻¹ | 4x100 ml | 1494 | 75 |
| swing-out rotor, 4-places | 90° | 4,000 min ⁻¹ | 4x100 ml | 1624 | 78 |
| swing-out rotor, 4-places | 90° | 4,500 min ⁻¹ | 4x100 ml | 1324 | 81 |
| swing-out rotor, 8-places | 90° | 4,000 min ⁻¹ | 8x15 ml | 1611 | 83 |
| swing-out rotor, 12-places | 55° / 60° / 80° | 4,000 min ⁻¹ | 12x15 ml | 1628 | 83 |
| swing-out rotor, 8-places | 45° | 5,000 min ⁻¹ | 8x50 ml | 1617 | 84 |
| swing-out rotor, 6-places | 90° | 4,000 min ⁻¹ | 6x50 ml | 1619 | 84 |
| swing-out rotor, 2-places | 90° | 4,000 min ⁻¹ | 10 plates | 1460 | 85 |
| swing-out rotor, 24-places | 90° | 13,000 min ⁻¹ | 24x2 ml | 1555 | 85 |
| ANGLE ROTORS | | | | | |
| angle rotor, 24-places | 50° | 16,000 min ⁻¹ | 24x2 ml | 1552 | 86 |
| angle rotor, 30-places | 45° | 14,150 min ⁻¹ | 30x2 ml | 1553 | 86 |
| angle rotor, 64-places | 45° | 13,000 min ⁻¹ | 64x0.2 ml | 1551 | 87 |
| angle rotor, 18-places | 45° | 14,150 min ⁻¹ | 18 x 5 ml | 1627 | 87 |
| angle rotor, 6-places | 35° | 9,000 min ⁻¹ | 6x94 ml | 1556 | 88 |
| angle rotor, 12-places | 35° | 6,000 min ⁻¹ | 12x15 ml | 1613 | 89 |
| angle rotor, 12-places | 35° | 12,000 min ⁻¹ | 12x15 ml | 1615 | 90 |
| angle rotor, 8-places | 45° | 4,500 min ⁻¹ | 8x50 ml | 1418 | 91 |

SWING-OUT ROTOR, 4-PLACE | 1554

Rotor

| | |
|----------------------------------|--------------------------------|
| max. RPM max. RCF | 4,500 min ¹ 3,328 |
| max. capacity | 4 x 200 ml |
| run-up run-down, braked in sec | 28 31 |
| angle max. noise level | 90° 60 dB (A) |
| temperature in °C ¹⁾ | -8 |
| Cat. No. | 1554 |



Bucket with clamp lock

| | |
|---------------------------|-------------|
| Lid bioseal ⁵⁾ | 1561 |
| Cat. No. | 1560 |




Bucket without clamp lock¹⁴⁾

| | |
|-----------------|-------------|
| Cat. No. | 1565 |
|-----------------|-------------|




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|-------------------------|---------|---------|---------------------------|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| capacity in ml | 1.5 | 2.0 | 5 | 5 | 6 | 7 | 9 | 15 | 15 | 25 | 50 | 85 | 100 | 125 | 150 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 17 x 59 | 12 x 75 | 12 x 82 | 12 x 100 | 14 x 100 | 17 x 100 | 18 x 102 | 24 x 100 | 34 x 100 | 38 x 101 | 44 x 100 | 51 x 100 | 51 x 116 |
| max. RCF ²⁾ | 3,328 | 2,332 | 3,328 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,260 | 3,056 | 3,147 | 3,260 | 3,124 | 3,328 | 3,328 |
| radius in mm | 147 | 103 | 147 | 142 | 142 | 142 | 142 | 142 | 144 | 135 | 138 | 144 | 138 | 147 | 147 |
| Cat. No. | microliter tubes | | | tubes²⁾ | | | | | | | | | | | - |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 11.5 x 39 | 11.5 x 39 | 17 x 52 | 13.5 x 60 | 13.5 x 60 | 13.5 x 60 | 17.5 x 60 | 17.5 x 60 | 18.5 x 74 | 25.2 x 66 | 35.2 x 69 | 38.5 x 74 | 45.5 x 69 | 52 x 77 | 52 x 77 |
| vessels per rotor | 56 | 56 | 16 | 28 | 28 | 28 | 20 | 20 | 16 | 4 | 4 | 4 | 4 | 4 | 4 |
| Cat. No. | 1571 | 1571 | 1593 | 1589 | 1589 | 1589 | 1588 | 1588 | 1572 | 1573 | 1574 | 1575 | 1576 | 1594 | 1594 |




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|-------------|---|---------|---------|---------|---------|---------|---------|---------|----------|---------|----------|---------|----------|----------|
| capacity in ml | 200 | 1.1–1.4 | 2.6–3.4 | 4.9 | 2.7–3 | 4–5 | 4–5.5 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8.5–10 | 12 |
| Ø x L in mm | 56 x 112 | 8 x 66 | 13 x 65 | 13 x 90 | 11 x 66 | 11 x 92 | 15 x 75 | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 | 17 x 102 |
| max. RCF ²⁾ | 3,328 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 |
| radius in mm | 147 | 142 | 142 | 142 | 142 | 142 | 142 | 142 | 142 | 142 | 142 | 142 | 142 | 142 | 142 |
| Cat. No. | 0555 | blood collection / urine vessels | | | | | | | | | | | | | |




Adapter

| | | | | | | | | | | | | | | | |
|--------------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 57 x 77 | 13.5 x 60 | 13.5 x 60 | 13.5 x 60 | 13.5 x 60 | 13.5 x 60 | 17.5 x 60 | 17.5 x 60 | 17.5 x 60 | 17.5 x 60 | 13.5 x 60 | 13.5 x 60 | 17.5 x 60 | 17.5 x 60 | 17.5 x 74 |
| vessels per rotor | 4 | 28 | 28 | 28 | 28 | 28 | 20 | 20 | 20 | 20 | 28 | 28 | 20 | 20 | 12 |
| Cat. No. | - | 1589 | 1589 | 1589 | 1589 | 1589 | 1588 | 1588 | 1588 | 1588 | 1589 | 1589 | 1588 | 1588 | 1591 |




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|-------------------------|-----------------------------|----------|----------|----------|----------|---------|----------|----------|---------|---------|----------|----------|----------|--------------------------|
| capacity in ml | 11 | 15 | 15 | 30 | 50 | 12 | 25 | 30 | 50 | 10 | 30 | 50 | 85 | 94 | 30 |
| Ø x L in mm | 16 x 110 | 17 x 120 | 17 x 120 | 25 x 110 | 30 x 115 | 17 x 100 | 25 x 90 | 15 x 110 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | 38 x 102 | 44 x 105 |
| max. RCF ²⁾ | 3,260 | 3,328 | 3,328 | 3,328 | 3,328 | 3,260 | 3,328 | 3,328 | 3,328 | 3,215 | 3,260 | 3,260 | 3,260 | 3,260 | 3,192 |
| radius in mm | 144 | 147 | 147 | 147 | 147 | 144 | 147 | 147 | 147 | 142 | 144 | 144 | 144 | 144 | 141 |
| Cat. No. | Nunc[®] | tubes with screw cap | | | | | | | | | | | | | 0534⁶⁾ |

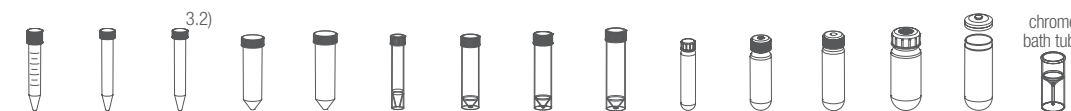

Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17.5 x 74 | 17 x 77 | 17 x 77 | 26 x 77 | 30 x 77 | 17.5 x 74 | 26 x 65 | 26 x 65 | 30 x 77 | 16.5 x 60 | 26 x 74 | 29 x 74 | 38.5 x 74 | 38.5 x 74 | 45 x 71 |
| vessels per rotor | 16 | 8 | 12 | 4 | 4 | 16 | 4 | 4 | 4 | 20 | 4 | 4 | 4 | 4 | 4 |
| Cat. No. | 1581 | 1577 | 1595 | 1578 | 1579 | 1581 | 1582 | 1582 | 1583 | 1584 | 1585 | 1586 | 1575 | 1575 | 1587 |



SWING-OUT ROTOR, 4-PLACE | 1554

Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,500 min ⁻¹ 3,328 |
| max. capacity | 4 x 50 ml |
| run-up run-down, braked in sec | 28 31 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C ¹⁾ | -8 |
| Cat. No. | 1554 |



Bucket

| | |
|-----------------|-------------|
| Cat. No. | 1559 |
|-----------------|-------------|



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|----------------------------|-------|--------|--------|--------|--------|---|---------|---------|---------|-------|--------|--------|---------|--------|
| capacity in ml | 5 | 6 | 7 | 8 | 9 | 15 | 2.6 – 3.4 | 2.7 – 3 | 4 – 5.5 | 4.5 – 5 | 4.9 | 9 – 10 | 10 | 1.6 – 5 | 4 – 7 |
| Ø x L in mm | 12x75 | 12x82 | 12x100 | 16x125 | 14x100 | 17x100 | 13x65 | 11x66 | 15x75 | 11x92 | 13x90 | 16x92 | 15x102 | 13x75 | 13x100 |
| max. RCF ²⁾ | 3,215 | 3,215 | 3,215 | 3,328 | 3,260 | 3,260 | 3,215 | 3,215 | 3,215 | 3,215 | 3,215 | 3,260 | 3,260 | 3,215 | 3,215 |
| radius in mm | 142 | 142 | 142 | 147 | 144 | 144 | 142 | 142 | 142 | 142 | 142 | 144 | 144 | 142 | 142 |
| Cat. No. | tubes ²⁾ | | | | | | blood collection / urine vessels | | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|--------------|--------------|-------------|-------------|--------------|-------------|-------------|--------------|--------------|-------------|-------------|
| boring Ø x L in mm | 13.4x57.5 | 13.4x57.5 | 13.4x57.5 | 16.4x82 | 17.5x81 | 17.5x81 | 13.4x57.5 | 13.4x57.5 | 17.5x81 | 13.4x57.5 | 13.4x57.5 | 17.5x81 | 17.5x81 | 13.4x57.5 | 13.4x57.5 |
| vessels per rotor | 20 | 20 | 20 | 16 | 16 | 16 | 20 | 20 | 16 | 20 | 20 | 16 | 16 | 20 | 20 |
| Cat. No. | 1486 | 1486 | 1486 | 1488 | 1482A | 1482A | 1486 | 1486 | 1482A | 1486 | 1486 | 1482A | 1482A | 1486 | 1486 |

Vessels

| | | | | | | | |
|------------------------|-------------------------------|----------|--------|-----------------------------|----------|--------|--------|
| capacity in ml | 4 – 7 | 8.5 – 10 | 12 | 15 | 50 | 12 | 50 |
| Ø x L in mm | 16x75 | 16x100 | 17x102 | 17x120 | 29 x 115 | 17x100 | 29x115 |
| max. RCF ²⁾ | 3,215 | 3,260 | 3,147 | 3,351 | 3,305 | 3,260 | 3,305 |
| radius in mm | 142 | 144 | 139 | 148 | 146 | 144 | 146 |
| Cat. No. | blood- / urine vessels | | | tubes with screw cap | | | |





Adapter





| | | | | | | | |
|--------------------|--------------|--------------|-------------|--------------|-------------|--------------|---------------------------|
| boring Ø x L in mm | 17.5x81 | 17.5x81 | 17.5x74 | 17x100 | 30x98 | 17.5x81 | 30x98 |
| vessels per rotor | 16 | 16 | 12 | 16 | 4 | 16 | 4 |
| Cat. No. | 1482A | 1482A | 1487 | 1483A | 1484 | 1482A | 1484 ⁴⁾ |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.2) When using these tubes, bucket 1560 cannot be closed with lid 1561.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- 6) A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.
- 14) With the E3922 add-on kit and the 1561 lid, the 1565 carrier can be converted at a later time to a 1560 carrier with single-hand clamp lock.

SWING-OUT ROTOR, 4-PLACE | 1554

| | | | |
|----------------------------------|---|---------------|--|
| |  | |  |
| Rotor | | Bucket | |
| max. RPM max. RCF | 4,500 min ⁻¹ 3,260 | Cat. No. | 1563 |
| max. capacity | 8 x 50 ml | | |
| run-up run-down, braked in sec | 28 31 | | |
| angle max. noise level | 90° 58 dB (A) | | |
| temperature in °C ¹⁾ | -8 | | |
| Cat. No. | 1554 | | |



| | | | | |
|------------------------|---|---|---|---|
| |  |  |  |  |
| Vessels | | | | |
| capacity in ml | 12 | 15 | 50 | 50 |
| Ø x L in mm | 17x100 | 17x120 | 29x115 | 29x115 |
| max. RCF ²⁾ | 3,260 | 3,260 | 3,260 | 3,260 |
| radius in mm | 144 | 144 | 144 | 144 |
| Cat. No. | tubes with screw cap | | | |

+

Adapter

boring Ø x L in mm

vessels per rotor

Cat. No.

17x87

8

1592

17x87

8

1592

30x87

8

-

30x87


8

-

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.














SWING-OUT ROTOR, 4-PLACE | 1494

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 5,000 min ⁻¹ 4,193 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 30 32 |
| angle max. noise level | 90° 56 dB (A) |
| temperature in °C ¹⁾ | -10 |
| Cat. No. | 1494 |





























| | |
|-----------------|-------------|
| Bucket | |
| Cat. No. | 1425 |
















| | | | | | | | | | | | | | |
|------------------------|---|---|---|---|---|---|---|---|--|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |  |  |  |  |  |  |
| capacity in ml | 1.5 | 2.0 | 1 | 3 | 5 | 6 | 7 | 9 | 15 | 25 | 50 | 100 | 1-8 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 6 x 45 | 10 x 60 | 12/18 x 75 | 12 x 82 | 12 x 100 | 14 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 44 x 100 | simple / multiple |
| max. RCF ²⁾ | 3,885 | 3,885 | 3,969 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,801 | 2,879 |
| radius in mm | 139 | 139 | 142 | 140 | 140 | 140 | 140 | 140 | 140 | 140 | 140 | 136 | 103 |
| Cat. No. | microliter tubes | Rhesus | tubes ²⁾ | | | | | | | | | | cyto chambers |



| | | | | | | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---|--|---|---|---|---|
| Adapter |  |  |  |  |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | 11.2 x 38 | 11.2 x 38 | 6.5 x 34 | 10.5 x 40 | 13.4 x 50 | 12.5 x 60 | 12.5 x 60 | 17.5 x 84 | 17.5 x 84 | 25.5 x 84 | 35.5 x 84 | 45.5 x 80 | - |
| vessels per rotor | 36 | 36 | 144 | 56 | 28 | 48 | 48 | 28 | 28 | 8 | 4 | 4 | 4 |
| Cat. No. | 1444 | 1444 | 1432 | 1433 | 1438 | 1434 | 1434 | 1431 | 1431 | 1435 | 1436 | 1437 | 1452 |

| | | | | | | | | | | | | | |
|------------------------|---|---|---|---|---|---|---|---|--|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |  |  |  |  |  |  |
| capacity in ml | 2.6 - 3.4 | 2.7 - 3 | 4 - 5.5 | 4.5 - 5 | 4.9 | 7.5 - 8.2 | 9 - 10 | 1.6 - 5 | 4 - 7 | 4 - 7 | 8.5 - 10 | 50 | |
| Ø x L in mm | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 | 29 x 115 | |
| max. RCF ²⁾ | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 3,913 | 4,081 | |
| radius in mm | 140 | 140 | 140 | 140 | 140 | 140 | 140 | 140 | 140 | 140 | 140 | 146 | |
| Cat. No. | blood collection / urine vessels | | | | | | | | | | | | - |



| | | | | | | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---|--|---|---|---|---|
| Adapter |  |  |  |  |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | 13.4 x 50 | 13.4 x 50 | 16.5 x 50 | 13.4 x 50 | 13.4 x 50 | 16.5 x 50 | 17 x 45 | 13.4 x 50 | 13.4 x 50 | 16.5 x 50 | 16.5 x 50 | 16.5 x 50 | 30 x 90 |
| vessels per rotor | 28 | 28 | 28 | 28 | 28 | 28 | 16 | 28 | 28 | 28 | 28 | 28 | 4 |
| Cat. No. | 1438 | 1438 | 1441 | 1438 | 1438 | 1441 | 1439 | 1438 | 1438 | 1441 | 1441 | 1441 | 1443 |

CYTO

Cyto system available for this model.
More information on [page 180](#)

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 4-PLACE | 1494



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 5,000 min ⁻¹ 4,109 |
| max. capacity | 4 x 50 ml |
| run-up run-down, braked in sec | 30 32 |
| angle max. noise level | 90° 54 dB (A) |
| temperature in °C ¹⁾ | -7 |
| Cat. No. | 1494 |



Bucket

| | |
|-----------------|-------------|
| Lid | 1421 |
| Cat. No. | 1427 |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|-------------------------|---------|---------------|----------------------------|------------|---------|----------|----------|----------|----------|----------|---|---------|---------|---------|
| | | | | | | | | | | | | | | | |
| capacity in ml | 1.5 | 2.0 | 1 | 3 | 5 | 6 | 7 | 9 | 15 | 25 | 50 | 1.1-1.4 | 2.6-2.9 | 2.7-3 | 4-5.5 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 6 x 45 | 10 x 60 | 12/13 x 75 | 12 x 82 | 12 x 100 | 14 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 15 x 75 |
| max. RCF ²⁾ | 4,109 | 4,109 | 4,081 | 4,053 | 4,025 | 4,053 | 3,941 | 3,941 | 3,941 | 3,941 | 3,941 | 4,109 | 4,025 | 4,053 | 4,109 |
| radius in mm | 147 | 147 | 146 | 145 | 144 | 145 | 141 | 141 | 141 | 141 | 141 | 147 | 144 | 145 | 147 |
| Cat. No. | microliter tubes | | Rhesus | tubes ²⁾ | | | | | | | | blood collection / urine vessels | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 11.5x38 | 11.5x38 | 6.5x23 | 10.5x23 | 13.4x58 | 12.5x42 | 12.4x82.5 | 15x69.5 | 17.8x82.5 | 25.5x82.5 | 35.5x82.5 | 9x41 | 13.4x58 | 12.5x42 | 15.6x41 |
| vessels per rotor | 36 | 36 | 120 | 48 | 32 | 48 | 48 | 24 | 24 | 8 | 4 | 48 | 32 | 48 | 20 |
| Cat. No. | 5277 | 5277 | 1357 | 1327 | 1732 | 5229 | 5230 | 5237 | 5231 | 5232 | 5233 | 5278 | 1732 | 5229 | 5279 |

Vessels

| | | | | | | | | | | | | | |
|------------------------|---|---------|---------|---------|---------|----------|---------|----------|-----------------------------|----------|---------|----------|----------|
| | | | | | | | | | | | | | |
| capacity in ml | 4.5-5 | 4.9 | 7.5-8.2 | 9-10 | 1.6-5 | 4-7 | 4-7 | 8.5-10 | 15 | 50 | 25 | 30 | 50 |
| Ø x L in mm | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 | 17 x 120 | 29 x 115 | 25 x 90 | 25 x 110 | 34 x 100 |
| max. RCF ²⁾ | 3,941 | 4,025 | 4,109 | 3,969 | 4,025 | 4,025 | 3,969 | 3,941 | 4,165 | 4,053 | 3,565 | 4,025 | 3,941 |
| radius in mm | 141 | 144 | 147 | 142 | 144 | 144 | 142 | 141 | 145 | 145 | 142 | 144 | 141 |
| Cat. No. | blood collection / urine vessels | | | | | | | | tubes with screw cap | | | | |



Adapter

| | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|---------------------------|-------------|-------------|---------------------------|-------------|-------------|-------------|-------------|-------------|---------------------------|
| | | | | | | | | | | | | | |
| boring Ø x L in mm | 12.4x82.5 | 13.4x58 | 15.6x41 | 17x66 | 13.4x58 | 13.4x58 | 17x66 | 17.8x82.5 | 17x90 | 30x90 | 25.5x72 | 25.5x85 | 35.5x82.5 |
| vessels per rotor | 48 | 32 | 20 | 20 | 32 | 32 | 20 | 24 | 4 | 4 | 8 | 4 | 4 |
| Cat. No. | 5230 | 1732 | 5279 | 5271 ⁴⁾ | 1732 | 1732 | 5271 ⁴⁾ | 5231 | 5275 | 5276 | 1731 | 5272 | 5233 ⁴⁾ |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

3.1) When using these tubes, carrier 1427 cannot be closed with lid 1421.

4) Please remove the spacer.

SWING-OUT ROTOR, 4-PLACE | 1494



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 5.000 min ⁻¹ 4.193 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 30 32 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C ¹⁾ | -10 |
| Cat. No. | 1494 |

Bucket

| | |
|---------------------------|-------------|
| Lid bioseal ⁵⁾ | 1492 |
| Cat. No. | 1495 |



UNIVERSAL
320 | 320 R

Vessels

| | | | | | | | | | | | | | | |
|------------------------|------------------|-------------------------|-------|--------|---------------|---------------------------|-------|--------|--------|--------|--------|--------|--------|--------|
| | | | | | | | | | | | | | | |
| capacity in ml | 0.5 | 1.5 | 2.0 | 1 | 3 | 5 | 6 | 7 | 9 | 15 | 25 | 50 | 94 | 100 |
| Ø x L in mm | 10.7x46 | 11x38 | 11x38 | 6 x 45 | 10 x 60 | 12/13x75 | 12x82 | 12x100 | 14x100 | 17x100 | 24x100 | 34x100 | 38x102 | 44x100 |
| max. RCF ²⁾ | 3,745 | 3,857 | 3,857 | 4,081 | 4,137 | 4,025 | 4,025 | 4,025 | 3,997 | 3,997 | 3,829 | 3,801 | 4,109 | 4,025 |
| radius in mm | 134 | 138 | 138 | 145 | 148 | 144 | 144 | 144 | 143 | 143 | 137 | 136 | 147 | 144 |
| Cat. No. | Pediatric | microliter tubes | | | Rhesus | tubes²⁾ | | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 11.2x38 | 11.2x38 | 11.2x38 | 6.5x34 | 10.5x40 | 13.4x45 | 13.4x45 | 13.4x45 | 13.4x45 | 17.6x89 | 17.6x89 | 25.2x77 | 35.2x77 | 38.5x92 | 45.6x98 |
| vessels per rotor | 20 | 20 | 20 | 108 | 36 | 20 | 20 | 20 | 20 | 16 | 16 | 4 | 4 | 4 | 4 |
| Cat. No. | 1351 | 1351 | 1351 | 1339 | 1343 | 1383 | 1383 | 1383 | 1383 | 1329 | 1329 | 1330 | 1331 | 1396 | 0761 |

Vessels

| | | | | | | | | | | | | | |
|------------------------|---|---------|---------|---------|---------|---------|---------|---------|----------|---------|----------|---------|----------|
| | | | | | | | | | | | | | |
| capacity in ml | 1.1-1.4 | 2.7-3 | 4.5-5 | 2.6-2.9 | 4.9 | 4-5.5 | 7.5-8.2 | 9-10 | 10 | 1.6-7 | 1.6-7 | 4-10 | 4-10 |
| Ø x L in mm | 8 x 66 | 11 x 66 | 11 x 92 | 13 x 65 | 13 x 90 | 15 x 75 | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 |
| max. RCF ²⁾ | 4,053 | 4,025 | 4,025 | 4,025 | 4,025 | 4,053 | 4,053 | 3,997 | 4,193 | 4,025 | 4,025 | 4,025 | 4,025 |
| radius in mm | 145 | 144 | 144 | 144 | 144 | 145 | 145 | 143 | 150 | 144 | 144 | 144 | 144 |
| Cat. No. | blood collection / urine vessels | | | | | | | | | | | | |



Adapter

| | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | | |
| boring Ø x L in mm | 9x47 | 13.4x45 | 13.4x45 | 13.4x45 | 13.4x45 | 15.6x47 | 15.6x47 | 17.6x89 | 17.6x89 | 13.4x45 | 13.4x45 | 16.5x52 | 16.5x52 |
| vessels per rotor | 28 | 20 | 20 | 20 | 20 | 16 | 16 | 16 | 16 | 20 | 20 | 16 | 16 |
| Cat. No. | 1457 | 1383 | 1383 | 1383 | 1383 | 1459 | 1459 | 1329 | 1329⁴⁾ | 1383 | 1383 | 1348 | 1348 |

Vessels

| | | | | | | | | | | | |
|------------------------|-----------------------------|----------|----------|----------|---------|----------|---------|---------|----------|----------|--------------------------|
| | | | | | | | | | | | |
| capacity in ml | 15 | 30 | 50 | 12 | 25 | 50 | 10 | 30 | 50 | 85 | 30 |
| Ø x L in mm | 17 x 120 | 25 x 110 | 29 x 115 | 17 x 100 | 25 x 90 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | 44 x 105 |
| max. RCF ²⁾ | 4,193 | 4,193 | 4,193 | 4,193 | 3,689 | 4,193 | 4,025 | 3,857 | 4,137 | 4,109 | 3,997 |
| radius in mm | 150 | 150 | 150 | 150 | 132 | 150 | 144 | 138 | 148 | 147 | 143 |
| Cat. No. | tubes with screw cap | | | | | | | | | | 0534⁴⁾ |



Adapter

| | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | |
| boring Ø x L in mm | 17x90 | 26x80 | 30x90 | 17x80 | 26x72 | 29.5x80 | 16.5x52 | 26x83 | 29x93 | 38.5x92 | 45.9x98 |
| vessels per rotor | 4 | 4 | 4 | 4 | 4 | 4 | 16 | 4 | 4 | 4 | 4 |
| Cat. No. | 1347 | 1365 | 1384 | 6311 | 1363 | 6318 | 1348 | 4417 | 4416 | 1396 | 0765 |



- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3) When using these tubes, bucket 1495 cannot be closed with lid 1492.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010. section 2-020.
- 6) A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.

SWING-OUT ROTOR, 4-PLACE | 1624



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,665 |
| max. capacity | 4 x 50 ml |
| run-up run-down, braked in sec | 20 25 |
| angle | 90° |
| Cat. No. | 1624 |



Vessels

| | | | | | | | | | | | | | |
|---------------------------------|---------------------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| | | | | | | | | | | | | | |
| capacity in ml | 5 | 5 | 6 | 7 | 9 | 9 | 15 | 15 | 20 | 25 | 45 | 50 | 1–8 |
| Ø x L in mm | 12x75 | 12x75 | 12x82 | 12x100 | 14x100 | 14x100 | 17x100 | 17x100 | 21x100 | 24x100 | 31x100 | 34x100 | simple / multiple |
| max. RCF ²⁾ | 2,057 | 2,164 | 2,308 | 2,308 | 2,308 | 2,415 | 2,308 | 2,415 | 2,361 | 2,451 | 2,361 | 2,451 | 1,646 |
| radius in mm | 115 | 121 | 129 | 129 | 129 | 135 | 129 | 137 | 132 | 137 | 132 | 137 | 92 |
| temperature in °C ¹⁾ | -17 | -17 | -17 | -17 | -17 | -15 | -17 | -15 | -15 | -15 | -15 | -15 | -16 |
| Cat. No. | tubes²⁾ | | | | | | | | | | | | cyto chambers |



Carrier

| | | | | | | | | | | | | | |
|--------------------|----------------|-------------|----------------|----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | | |
| boring Ø x L in mm | 12x75 | 13.5x65 | 12.5x71.5 | 14.6x74 | 14.6x78 | 17.6x71.5 | 17.6x78 | 21.5x74 | 26x78 | 32x74 | 35x78 | - | - |
| vessels per rotor | 16 | 68 | 16 | 16 | 20 | 40 | 16 | 28 | 8 | 8 | 4 | 4 | 4 |
| Cat. No. | 1369-91 | 1372 | 1369-92 | 1369-92 | 1370 | 1741 | 1369 | 1742 | 1346 | 1745 | 1345 | 1746 | 1660 |

Vessels

| | | | | | | | | | | |
|---------------------------------|---|-----------|---------|-------|---------|---------|----------|----------|----------|----------|
| | | | | | | | | | | |
| capacity in ml | 1.1 – 1.4 | 2.6 – 3.4 | 4.5 – 5 | 4.9 | 1.6 – 5 | 4 – 7 | 4 – 7 | 4 – 7 | 8.5 – 10 | 30 |
| Ø x L in mm | 8 x 66 | 13x65 | 15x75 | 13x90 | 13x75 | 16 x 75 | 13 x 100 | 13 x 100 | 16 x 100 | 26 x 95 |
| max. RCF ²⁾ | 2,415 | 2,325 | 2,325 | 2,451 | 2,325 | 2,325 | 2,361 | 2,451 | 2,308 | 2,451 |
| radius in mm | 135 | 130 | 130 | 137 | 130 | 130 | 132 | 137 | 129 | 137 |
| temperature in °C ¹⁾ | -15 | -15 | -15 | -15 | -15 | -15 | -15 | -15 | -17 | -15 |
| Cat. No. | blood collection / urine vessels | | | | | | | | | - |



Carrier


| | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|--------------------------|
| | | | | | | | | | |
| boring Ø x L in mm | 14.6x78 | 17.6x78 | 17.6x78 | 14.6x78 | 17.6x78 | 17.6x78 | 14.6x74 | 13.5x78 | 17.6x71.5 |
| vessels per rotor | 40 | 28 | 28 | 40 | 28 | 28 | 20 | 28 | 16 |
| Cat. No. | 1741 | 1742 | 1742 | 1741 | 1742 | 1742 | 1370⁴⁾ | 1739 | 1369⁴⁾ |

CYTO

For more information about our Cyto accessory, see [page 178](#)

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Please remove spacer.
- Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- Packed in units of 10 pieces.
- This combination permits no Vacutainers made of glass.


— SWING-OUT ROTOR, 4-PLACE | 1624

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,000 min ⁻¹ 1,968 |
| max. capacity | 48 x 4 ml |
| run-up run-down, braked in sec | 22 25 |
| angle max. noise level | 90° 48 dB (A) |
| temperature in °C | -15 |
| Cat. No. | 1624 |




| | |
|--|-------------|
|  | |
| Bucket | |
| Cat. No. | 1366 |




| | |
|---|---|
|  | |
| Vessels | |
| capacity in ml | 1.5 2.0 1 4 |
| Ø x L in mm | 11 x 38 11 x 38 6 x 45 12 x 60 |
| max. RCF ²⁾ | 1,968 1,968 1,950 1,932 |
| radius in mm | 110 110 109 108 |
| Cat. No. | microliter tubes Rhesus tubes²⁾ |



| | |
|---|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 11.5 x 38 11.5 x 38 6.5 x 23 12.5 x 44 |
| vessels per rotor | 36 36 120 48 |
| Cat. No. | 5277 5277 1357 1326 |



— SWING-OUT ROTOR, 4-PLACE | 1624

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF ²⁾ | 4,000 min ⁻¹ 2,665 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 20 25 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C | -15 |
| Cat. No. | 1624 |



| | |
|--|-------------|
|  | |
| Bucket | |
| Lid bioseal ⁵⁾ | 1492 |
| Cat. No. | 1481 |



| | |
|--|--|
|  | |
| Vessels | |
| capacity in ml | 0.5 1.5 2.0 1 3 4 5 6 7 9 15 25 50 85 100 |
| Ø x L in mm | 10.7 x 46 11 x 38 11 x 38 6 x 45 10 x 60 10 x 88 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 24 x 100 34 x 100 38 x 106 44 x 100 |
| max. RCF ²⁾ | 2,379 2,451 2,451 2,594 2,630 2,630 2,558 2,558 2,558 2,540 2,540 2,433 2,415 2,612 2,558 |
| radius in mm | 133 137 137 145 147 131 143 143 143 142 142 136 135 146 143 |
| Cat. No. | Pediatric microliter tubes Rhesus tubes²⁾ |
|  | |
| Adapter | |
| boring Ø x L in mm | 11.2 x 38 11.2 x 38 11.2 x 38 6.5 x 34 10.5 x 43 13.4 x 45 13.4 x 45 13.4 x 45 13.4 x 45 17.6 x 89 17.6 x 89 25.2 x 77 35.2 x 75 38.5 x 92 45.9 x 98 |
| vessels per rotor | 20 20 20 108 36 20 20 20 20 16 16 4 4 4 4 |
| Cat. No. | 1351 1351 1351 1339 1343 1383 1383 1383 1383 1329 1329 1330 1331 1396 0761 |

SWING-OUT ROTOR, 4-PLACE | 1624



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,665 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 20 25 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C | -15 |
| Cat. No. | 1624 |



Bucket

| | |
|---------------------------|-------------|
| Lid bioseal ⁵⁾ | 1492 |
| Cat. No. | 1481 |



Vessels

| | | | | | | | | | | | | | |
|------------------------|----------------------------------|---------|---------|---------|---------|---------|---------|---------|----------|---------|----------|---------|----------|
| | | | | | | | | | | | | | |
| capacity in ml | 1.1–1.4 | 2.7–3 | 4.5–5 | 2.6–2.9 | 4.9 | 4–8.5 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8.5–10 |
| Ø x L in mm | 8 x 66 | 11 x 66 | 11 x 92 | 13 x 65 | 13 x 90 | 15 x 75 | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 |
| max. RCF ²⁾ | 2,576 | 2,558 | 2,558 | 2,558 | 2,558 | 2,576 | 2,576 | 2,540 | 2,665 | 2,558 | 2,558 | 2,522 | 2,522 |
| radius in mm | 144 | 143 | 143 | 143 | 143 | 144 | 144 | 142 | 149 | 143 | 143 | 141 | 141 |
| Cat. No. | blood collection / urine vessels | | | | | | | | | | | | |



Adapter

| | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | | |
| boring Ø x L in mm | 9 x 47 | 13.4 x 45 | 13.4 x 45 | 13.4 x 45 | 13.4 x 45 | 15.6 x 47 | 15.6 x 47 | 17.6 x 89 | 17.6 x 89 | 13.4 x 45 | 13.4 x 45 | 16.5 x 52 | 16.5 x 52 |
| vessels per rotor | 28 | 20 | 20 | 20 | 20 | 16 | 16 | 16 | 16 | 20 | 20 | 16 | 16 |
| Cat. No. | 1457 | 1383 | 1383 | 1383 | 1383 | 1459 | 1459 | 1329 | 1329⁴⁾ | 1383 | 1383 | 1348 | 1348 |

Vessels

| | | | | | | | | | | | | | |
|------------------------|-----------------------------|----------|----------|---------|----------|----------|---------|---------|----------|----------|----------|--------------------------|--|
| | | | | | | | | | | | | | |
| capacity in ml | 15 | 50 | 12 | 25 | 30 | 50 | 10 | 30 | 50 | 85 | 30 | chrome bath tube | |
| Ø x L in mm | 17 x 120 | 29 x 115 | 17 x 100 | 25 x 90 | 25 x 110 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | 44 x 105 | | |
| max. RCF ²⁾ | 2,665 | 2,665 | 2,665 | 2,343 | 2,665 | 2,665 | 2,522 | 2,451 | 2,630 | 2,612 | 2,540 | | |
| radius in mm | 149 | 149 | 149 | 131 | 149 | 149 | 141 | 137 | 147 | 146 | 142 | | |
| Cat. No. | tubes with screw cap | | | | | | | | | | | 0534⁶⁾ | |



Adapter

| | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------|--|
| | | | | | | | | | | | | | |
| boring Ø x L in mm | 17 x 90 | 30 x 90 | 17 x 80 | 26 x 72 | 26 x 80 | 29.5 x 80 | 16.5 x 52 | 26 x 83 | 29 x 93 | 38.5 x 92 | 45.9 x 98 | Spacer | |
| vessels per rotor | 4 | 4 | 4 | 4 | 4 | 4 | 16 | 4 | 4 | 4 | 4 | | |
| Cat. No. | 1347 | 1384 | 6311 | 1363 | 1365 | 6318 | 1348 | 4417 | 4416 | 1396 | 0765 | | |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.) When using these tubes, bucket 1752 or 5051 cannot be closed with lid 1751 or 5053.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- 6) A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.

SWING-OUT ROTOR, 4-PLACE | 1324



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,500 min ⁻¹ 3,328 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 27 30 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C | -6 |
| Cat. No. | 1324 |

Bucket

| | |
|---------------------------|-------------|
| Lid bioseal ⁵⁾ | 1492 |
| Cat. No. | 1490 |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|------------------|-------------------------|-------|-------|---------------|---------------------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
| capacity in ml | 0.5 | 1.5 | 2.0 | 1 | 3 | 4 | 5 | 6 | 7 | 9 | 15 | 25 | 50 | 85 | 100 |
| Ø x L in mm | 10.7x46 | 11x38 | 11x38 | 6x45 | 10x60 | 10x88 | 12x75 | 12x82 | 12x100 | 14x100 | 17x100 | 24x100 | 34x100 | 38x106 | 44x100 |
| max. RCF ²⁾ | 2,966 | 3,056 | 3,056 | 3,237 | 3,283 | 3,283 | 3,192 | 3,192 | 3,192 | 3,170 | 3,170 | 3,034 | 3,011 | 3,260 | 3,192 |
| radius in mm | 131 | 135 | 135 | 143 | 145 | 145 | 141 | 141 | 141 | 140 | 140 | 134 | 133 | 144 | 141 |
| Cat. No. | Pediatric | microliter tubes | | | Rhesus | tubes²⁾ | | | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 11.2x38 | 11.2x38 | 11.2x38 | 6.5x34 | 10.5x43 | 10.5x43 | 13.4x45 | 13.4x45 | 13.4x45 | 17.6x89 | 17.6x89 | 25.2x77 | 35.2x77 | 38.5x92 | 45.9x100.5 |
| vessels per rotor | 20 | 20 | 20 | 108 | 36 | 36 | 20 | 20 | 20 | 16 | 16 | 4 | 4 | 4 | 4 |
| Cat. No. | 1351 | 1351 | 1351 | 1339 | 1343 | 1343 | 1383 | 1383 | 1383 | 1329 | 1329 | 1330 | 1331 | 1396 | 0761 |

Vessels

| | | | | | | | | | | | | | | |
|------------------------|---|---------|-------|-------|-------|-------|---------|-------|--------|-------|--------|-------|--------|----------|
| capacity in ml | 1.1–1.4 | 2.6–2.9 | 4.9 | 2.7–3 | 4.5–5 | 4–5.5 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8.5–10 | 15 |
| Ø x L in mm | 8 x 66 | 13x65 | 13x90 | 11x66 | 11x92 | 15x75 | 15x92 | 16x92 | 15x102 | 13x75 | 13x100 | 16x75 | 16x100 | 17x120 |
| max. RCF ²⁾ | 3,215 | 3,192 | 3,192 | 3,192 | 3,192 | 3,215 | 3,215 | 3,170 | 3,328 | 3,192 | 3,192 | 3,147 | 3,147 | 3,328 |
| radius in mm | 142 | 141 | 141 | 141 | 141 | 142 | 142 | 140 | 147 | 141 | 141 | 139 | 139 | 147 |
| Cat. No. | blood collection / urine vessels | | | | | | | | | | | | | - |



Adapter

| | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 9x47 | 13.4x45 | 13.4x45 | 13.4x45 | 13.4x45 | 15.6x47 | 15.6x47 | 17.6x89 | 17.6x89 | 13.4x45 | 13.4x45 | 16.5x52 | 16.5x52 | 17x90 |
| vessels per rotor | 28 | 20 | 20 | 20 | 20 | 16 | 16 | 16 | 16 | 20 | 20 | 16 | 16 | 4 |
| Cat. No. | 1457 | 1383 | 1383 | 1383 | 1383 | 1459 | 1459 | 1329 | 1329⁴⁾ | 1383 | 1383 | 1348 | 1348 | 1347 |

Vessels

| | | | | | | | | | | | | |
|------------------------|-----------------------------|----------|----------|----------|---------|----------|----------|---------|---------|----------|----------|-------------|
| Kapazität in ml | 15 | 30 | 50 | 12 | 25 | 30 | 50 | 10 | 30 | 50 | 85 | 30 |
| Ø x L in mm | 17x120 | 25 x 110 | 29 x 115 | 17 x 100 | 25 x 90 | 25 x 110 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | 44 x 105 |
| max. RCF ²⁾ | 3,328 | 3,328 | 3,328 | 3,328 | 2,920 | 3,328 | 3,328 | 3,147 | 3,056 | 3,283 | 3,260 | 3,170 |
| radius in mm | 147 | 147 | 147 | 147 | 129 | 147 | 147 | 139 | 135 | 145 | 144 | 140 |
| Cat. No. | tubes with screw cap | | | | | | | | | | | - 6) |



Adapter

| | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17 x 107 | 26x80 | 30x90 | 17x80 | 26x72 | 26x80 | 29.5x80 | 16,5x52 | 26x83 | 29x93 | 38.5x92 | 45.9x100.5 |
| vessels per rotor | 12 | 4 | 4 | 4 | 4 | 4 | 4 | 16 | 4 | 4 | 4 | 4 |
| Cat. No. | 1356 | 1365 | 1384 | 6311 | 1363 | 1365 | 6318 | 1348 | 4417 | 4416 | 1396 | 0765 |

SWING-OUT ROTOR, 4-PLACE | 1324

Rotor

| | |
|----------------------------------|--------------------------------|
| max. RPM max. RCF | 4,500 min ¹ 3,305 |
| max. capacity | 4 x 50 ml |
| run-up run-down, braked in sec | 27 30 |
| angle max. noise level | 90° 54 dB (A) |
| temperature in °C | -6 |
| Cat. No. | 1324 |



Bucket

| | |
|-----------------|-------------|
| Cat. No. | 1398 |
|-----------------|-------------|



Vessels

| | | | | | | | | | | | |
|------------------------|---------------------------|--------|---|-------|--------|-------|--------|-----------------------------|----------|----------|----------|
| | | | | | | | | | | | |
| capacity in ml | 9 | 15 | 4–4,5 | 9–10 | 10 | 4–7 | 8,5–10 | 15 | 50 | 12 | 50 |
| Ø x L in mm | 14x100 | 17x100 | 15x75 | 16x92 | 15x102 | 16x75 | 16x100 | 17 x 120 | 29 x 115 | 17 x 100 | 29 x 115 |
| max. RCF ²⁾ | 3,192 | 3,192 | 2,875 | 3,192 | 3,192 | 3,034 | 3,034 | 3,305 | 3,260 | 3,192 | 3,260 |
| radius in mm | 141 | 141 | 127 | 141 | 141 | 134 | 134 | 146 | 144 | 141 | 144 |
| Cat. No. | tubes²⁾ | | blood collection / urine vessels | | | | | tubes with screw cap | | | |



Adapter

| | | | | | | | | | | | |
|--------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|--------------|--------------------------|
| | | | | | | | | | | | |
| boring Ø x L in mm | 17.5x81 | 17.5x81 | 17.5x81 | 17.5x81 | 17.5x81 | 17.5x81 | 17.5x81 | 17x100 | 30x98 | 17.5x81 | 30x98 |
| vessels per rotor | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 4 | 16 | 4 |
| Cat. No. | 1482A | 1482A | 1482A | 1482A | 1482A | 1482A | 1482A | 1483A | 1484 | 1482A | 1484⁴⁾ |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

4) Please remove spacer.

— SWING-OUT ROTOR, 8-PLACE | 1611



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,415 |
| max. capacity | 8 x 15 ml |
| run-up run-down, braked in sec | 20 20 |
| angle max. noise level | 90° 48 dB (A) |
| temperature in °C ¹⁾ | -16 |
| Cat. No. | 1611 |



Vessels

| | | | | | | | | | | | | | | |
|------------------------|----------------------------|---------|----------|----------|----------|---|---------|---------|---------|-----------|---------|----------|---------|----------|
| | | | | | | | | | | | | | | |
| capacity in ml | 5 | 6 | 7 | 10 | 15 | 2.6 – 2.9 | 2.7 – 3 | 4 – 5.5 | 4.5 – 5 | 7.5 – 8.2 | 1.6 – 5 | 4 – 7 | 4 – 7 | 8.5 – 10 |
| Ø x L in mm | 12/13 x 75 | 12 x 82 | 12 x 100 | 13 x 100 | 17 x 100 | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 15 x 92 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 |
| max. RCF ²⁾ | 1,914 | 1,914 | 2,415 | 2,415 | 2,415 | 1,914 | 1,914 | 1,914 | 2,415 | 2,415 | 1,914 | 2,415 | 1,914 | 2,415 |
| radius in mm | 107 | 107 | 135 | 135 | 135 | 107 | 107 | 107 | 135 | 135 | 107 | 135 | 107 | 135 |
| Cat. No. | tubes ²⁾ | | | | | blood collection / urine vessels | | | | | | | | |



Bucket

| | | | | | | | | | | | | | | |
|--------------------|---------------|---------------|-------------|-------------|-------------|---------------|---------------|---------------|-------------|-------------|---------------|-------------|---------------|-------------|
| | | | | | | | | | | | | | | |
| boring Ø x L in mm | 13 x 53 | 13 x 53 | 13.2 x 81 | 13.2 x 81 | 17.5 x 81 | 13 x 53 | 13 x 53 | 17.5 x 53 | 13.2 x 81 | 17.5 x 81 | 13 x 53 | 13.2 x 81 | 17.5 x 53 | 17.5 x 81 |
| vessels per rotor | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Cat. No. | 1131-A | 1131-A | 1643 | 1643 | 1644 | 1131-A | 1131-A | 1132-A | 1643 | 1644 | 1131-A | 1643 | 1132-A | 1644 |

— SWING-OUT ROTOR, 12-PLACE | 1628



Rotor

| | |
|-----------------------------------|---------------------------------|
| max. RPM max. RCF ²⁾ | 5,000 min ⁻¹ 4,193 |
| max. capacity | 12 x 15 ml |
| run-up run-down, braked in sec | 16 16 |
| angle max. noise level | 55° / 60° / 80° 54 dB (A) |
| Cat. No. | 1628 |



Vessels

| | | | | | | | | | | |
|---------------------------------|----------------------------|----------|----------|---|---------|---------|-----------|---------|---------|----------|
| | | | | | | | | | | |
| capacity in ml | 5 | 10 | 15 | 2.6 – 2.9 | 2.7 – 3 | 4 – 5.5 | 7.5 – 8.2 | 1.6 – 5 | 4 – 7 | 8.5 – 10 |
| Ø x L in mm | 12/13 x 75 | 17 x 100 | 17 x 100 | 13 x 65 | 11 x 66 | 15 x 75 | 15 x 92 | 13 x 75 | 16 x 75 | 16 x 100 |
| max. RCF ²⁾ | 3,466 | 3,522 | 4,193 | 3,466 | 3,466 | 3,522 | 4,193 | 3,466 | 3,522 | 4,193 |
| radius in mm | 124 | 126 | 150 | 124 | 124 | 126 | 150 | 124 | 126 | 150 |
| temperature in °C ¹⁾ | -10 | -10 | -10 | -15 | -15 | -15 | -10 | -15 | -15 | -10 |
| Cat. No. | tubes ²⁾ | | | blood collection / urine vessels | | | | | | |



Bucket

| | | | | | | | | | | |
|--------------------|---------------|-------------|-------------|---------------|---------------|-------------|-------------|---------------|-------------|-------------|
| | | | | | | | | | | |
| boring Ø x L in mm | 13.2 x 53 | 17.5 x 53 | 17.5 x 79 | 13.2 x 53 | 13.2 x 53 | 17.5 x 53 | 17.5 x 79 | 13.2 x 53 | 17.5 x 53 | 17.5 x 79 |
| vessels per rotor | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| Cat. No. | 1127-A | 1122 | 1621 | 1127-A | 1127-A | 1122 | 1621 | 1127-A | 1122 | 1621 |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— SWING-OUT ROTOR, 8-PLACE | 1617



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 5,000 min ⁻¹ 3,857 |
| max. capacity | 8 x 50 ml |
| run-up run-down, braked in sec | 20 19 |
| angle max. noise level | 45° 50 dB (A) |
| temperature in °C ¹⁾ | -10 |


Cat. No. 1617



Vessels

| | | |
|------------------------|----------|----------|
| capacity in ml | 15 | 50 |
| Ø x L in mm | 17 x 120 | 29 x 115 |
| max. RCF ²⁾ | 3,857 | 3,857 |
| radius in mm | 138 | 138 |

Cat. No. tubes with screw cap



Adapter

| | | |
|--------------------|---------|-----------|
| boring Ø x L in mm | 17 x 84 | 30 x 94.5 |
| vessels per rotor | 8 | 8 |

Cat. No. 1462-A -



— SWING-OUT ROTOR, 6-PLACE | 1619



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,701 |
| max. capacity | 6 x 50 ml |
| run-up run-down, braked in sec | 20 22 |
| angle max. noise level | 90° 50 dB (A) |
| temperature in °C ¹⁾ | -15 |


Cat. No. 1619



Vessels

| | | |
|------------------------|----------|----------|
| capacity in ml | 15 | 50 |
| Ø x L in mm | 17 x 120 | 29 x 115 |
| max. RCF ²⁾ | 2,701 | 2,701 |
| radius in mm | 151 | 151 |

Cat. No. tubes with screw cap



Adapter


| | | |
|--------------------|---------|-----------|
| boring Ø x L in mm | 17 x 84 | 30 x 87.5 |
| vessels per rotor | 6 | 6 |

Cat. No. 1462-A -















- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.


— SWING-OUT ROTOR, 2-PLACE | 1460

| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 4,000 min ⁻¹ 2,218 |
| max. capacity | 10 plates |
| run-up run-down, braked in sec | 40 45 |
| angle max. noise level | 90° 55 dB (A) |
| temperature in °C ¹⁾ | -6 |
| Cat. No. | 1460 |



| | | | | | | |
|------------------------|---|---|---|---|---|--|
| Vessels |  |  |  |  |  |  |
| capacity in ml | - | - | - | - | - | 0,2 |
| W x D x H in mm | 128x86x15 | 128x86x22 | 128x86x44.5 | 128x86x46 | 124x82x20 | - |
| max. RCF ²⁾ | 2,433 | 2,433 | 2,433 | 2,433 | 2,433 | 2,433 |
| radius in mm | 136 | 136 | 136 | 136 | 136 | 136 |
| Cat. No. | MTP | CP | DWP | MS | PCR plate, 96 wells | PCR strips |
| + | | | | | | |
| Bucket |  |  |  |  |  |  |
| boring Ø x L in mm | - | - | - | - | - | - |
| vessels per rotor | 10 | 8 | 2 | 2 | 2 | 24 x 8 |
| Cat. No. | 1453-A | 1453-A | 1453-A | 1453-A | 1453-A + 1485 | 1453-A + 1485 |

— SWING-OUT ROTOR, 24-PLACE | 1555

| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 13,000 min ⁻¹ 18,327 |
| max. capacity | 24x2 ml |
| run-up run-down, braked in sec | 36 31 |
| angle | 90° |
| temperature in °C ¹⁾ | 3 |
| Cat. No. | 1555 |













Lid bioseal[®],
phenol-resistant

Cat. No.




INCLUSIVE



| | | | | | | |
|------------------------|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2 |
| Ø x L in mm | 6x18 | 6x45 | 8x30 | 8x45 | 11x38 | 11x38 |
| max. RCF ²⁾ | 18,327 | 18,327 | 18,327 | 18,327 | 18,327 | 18,327 |
| radius in mm | 97 | 97 | 97 | 97 | 97 | 97 |
| Cat. No. | microliter tubes | | | | | |
| + | | | | | | |
| Adapter |  |  |  |  |  |  |
| boring Ø x L in mm | 6x40 | 6x40 | 8x40 | 8x40 | 10.2x19.3 | 11.5x38.5 |
| vessels per rotor | 24 | 24 | 24 | 24 | 24 | 24 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by TÜV in conformity with DIN EN 61010, section 2-020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.


— ANGLE ROTOR, 24-PLACE | 1552

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 16,000 min ⁻¹ 24,900 |
| max. capacity | 24 x 2 ml |
| run-up run-down, braked in sec | 30 29 |
| angle max. noise level | 50° 58 dB (A) |
| temperature in °C ¹⁾ | 2 |
| Cat. No. | 1552 |


Lid bioseal[®],
phenol-resistant

Cat. No.


**INCLUSIVE**

| | |
|---|--|
|  | |
| Vessels | |
| capacity in ml | 0.2 0.4 0.5 0.8 1.5 2 0.5 |
| Ø x L in mm | 6x18 6x45 8x30 8x45 11x38 11x38 10,7 x 46 |
| max. RCF ²⁾ | 24,900 24,900 24,900 24,900 24,900 24,900 23,755 |
| radius in mm | 87 87 87 87 87 87 83 |
| Cat. No. | microliter tubes Pediatric |



| | |
|---|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 6x40 6x40 8x40 8x40 10,2x19,3 11,2x42,6 11,2x39 |
| vessels per rotor | 24 24 24 24 24 24 12 |
| Cat. No. | 2024 2024 2023 2023 2031⁷⁾ - 0788¹⁷⁾ |


— ANGLE ROTOR, 30-PLACE | 1553

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 14,150 min ⁻¹ 21,713 |
| max. capacity | 30 x 2 ml |
| run-up run-down, braked in sec | 35 32 |
| angle | 45° |
| temperature in °C ¹⁾ | -1 |
| Cat. No. | 1553 |


Lid bioseal[®],
phenol-resistant

Cat. No.

**INCLUSIVE**


| | |
|---|--|
|  | |
| Vessels | |
| capacity in ml | 0.2 0.4 0.5 0.8 1.5 2 0.5 |
| Ø x L in mm | 6x18 6x45 8x30 8x45 11x38 11x38 10,7 x 46 |
| max. RCF ²⁾ | 21,713 21,713 21,713 21,713 21,713 21,713 20,818 |
| radius in mm | 97 97 97 97 97 97 93 |
| Cat. No. | microliter tubes Pediatric |



| | |
|---|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 6x40 6x40 8x40 8x40 10,2x19,3 11,2x40,9 11,2x39 |
| vessels per rotor | 30 30 30 30 30 30 15 |
| Cat. No. | 2024 2024 2023 2023 2031⁷⁾ - 0788¹⁷⁾ |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by TÜV in conformity with DIN EN 61010, section 2-020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.
- 17) Packed in units of 15 pieces.

— ANGLE ROTOR, 8-PLACE | 1551

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 13,000 min ⁻¹ 13,604 |
| max. capacity | 8 x PCR-Strips |
| run-up run-down, braked in sec | 36 31 |
| angle max. noise level | 45° 58 dB (A) |
| temperature in °C ¹⁾ | -4 |
| Cat. No. | 1551 |




Lid bioseal[®],
phenol-resistant
Cat. No.




INCLUSIVE



| | |
|---|----------|
|  | |
| Vessels | |
| capacity in ml | 0.2 |
| Ø x L in mm | 6 x 18 |
| max. RCF ²⁾ | 13,604 |
| radius in mm | 64 |
| Cat. No. | - |

PCR-
Strips

— ANGLE ROTOR, 18-PLACE | 1627

| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 14,150 min ⁻¹ 22,161 |
| max. capacity | 18 x 5 ml |
| run-up run-down, braked in sec | 35 32 |
| angle | 45° |
| temperature in °C ¹⁾ | 2 |
| Cat. No. | 1627 |




Lid bioseal[®],
phenol-resistant
Cat. No.



INCLUSIVE




| | |
|---|----------|
|  | |
| Vessels | |
| capacity in ml | 5 |
| Ø x L in mm | 17 x 59 |
| max. RCF ²⁾ | 22,161 |
| radius in mm | 18 |
| Cat. No. | - |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by TÜV in conformity with DIN EN 61010, section 2-020.

— ANGLE ROTOR, 6-PLACE | 1556

| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 9.000 min ⁻¹ 10.595 |
| max. capacity | 6 x 94 ml |
| run-up run-down, braked in sec | 36 32 |
| angle max. noise level | 35° 60 dB (A) |
| temperature in °C ¹⁾ | 0 |
| Cat. No. | 1556 |

+































Lid bioseal[®],
phenol-resistant



Cat. No.





INCLUSIVE



| | | | | | | | | | | | | | | | |
|------------------------|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| capacity in ml | 1.5 | 2 | 15 | 50 | 50 | 85 | 7.5–8.2 | 9–10 | 10 | 8.5–10 | 15 | 50 | 10 | 30 | 50 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 17 x 100 | 35 x 105 | 34 x 100 | 38 x 101 | 15 x 92 | 16 x 92 | 15 x 102 | 16 x 100 | 17 x 120 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 |
| max. RCF ²⁾ | 10,324 | 10,324 | 10,052 | 10,414 | 10,414 | 10,595 | 10,052 | 10,052 | 10,052 | 10,052 | 10,052 | 10,052 | 10,414 | 9,690 | 10,142 |
| radius in mm | 114 | 114 | 111 | 115 | 115 | 117 | 111 | 111 | 111 | 111 | 111 | 111 | 115 | 107 | 112 |
| Cat. No. | microliter tubes | | tubes ³⁾ | | | | blood collection / urine vessels | | | | tubes with screw cap | | | | |
| Adapter |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | 11.4 x 39 | 11.4 x 39 | 17.5 x 78 | 35 x 89 | 35 x 89 | - | 17.5 x 78 | 17.5 x 78 | 17.5 x 78 | 17.5 x 78 | 17 x 106 | 29.8 x 97 | 16.5 x 72 | 26 x 85 | 29 x 92 |
| vessels per rotor | 24 | 24 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 12 | 6 | 6 |
| Cat. No. | 1449 | 1449 | 1478 | 1463 | 1463 | - | 1478 | 1478 | 1478 | 1478 | 1466 | 1454 | 1477 | 1447 | 1446 |

| | | |
|------------------------|---|---|
| Vessels |  |  |
| capacity in ml | 85 | 94 |
| Ø x L in mm | 38 x 106 | 38 x 102 |
| max. RCF ²⁾ | 10,595 | 10,595 |
| radius in mm | 117 | 117 |
| Cat. No. | tubes with screw cap | |

| | | |
|--------------------|---|---|
| Adapter |  |  |
| boring Ø x L in mm | - | - |
| vessels per rotor | 6 | 6 |
| Cat. No. | - | - |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by TÜV in conformity with DIN EN 61010, section 2-020.

— ANGLE ROTOR, 12-PLACE | 1613



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 4,146 |
| max. capacity | 12 x 15 ml |
| run-up run-down, braked in sec | 15 15 |
| angle max. noise level | 35° 50 dB (A) |
| temperature in °C ¹⁾ | -16 |
| Cat. No. | 1613 |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|------------------|-------------------------|---------|----------------------------|------------|---------|----------|---|-----------|---------|---------|---------|-----------|---------|----------|
| | | | | | | | | | | | | | | | |
| capacity in ml | 0.5 | 1.5 | 2.0 | 4 | 5 | 6 | 15 | 1.1 – 1.4 | 2.6 – 2.9 | 2.7 – 3 | 4.5 – 5 | 4.9 | 7.5 – 8.2 | 9 – 10 | 10 |
| Ø x L in mm | 10.7 x 46 | 11 x 38 | 11 x 38 | 10 x 88 | 12/13 x 75 | 12 x 82 | 17 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 15 x 102 |
| max. RCF ²⁾ | 2,777 | 2,737 | 2,737 | 3,502 | 3,300 | 3,300 | 4,146 | 3,300 | 3,300 | 3,300 | 4,146 | 4,146 | 4,146 | 4,146 | 4,146 |
| radius in mm | 69 | 68 | 68 | 87 | 82 | 82 | 103 | 82 | 82 | 82 | 103 | 103 | 103 | 103 | 103 |
| Cat. No. | Pediatric | microliter tubes | | tubes ²⁾ | | | | blood collection / urine vessels | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|----------------------------|---------|---------|-------------|---------------|---------------|-----------|---------------|---------------|---------------|-----------|-----------|-----------|-----------|-----------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 11 x 35 | 11 x 35 | 11 x 35 | 11.5 x 67.5 | 13.5 x 59 | 13.5 x 59 | 17.7 x 88 | 13.5 x 59 | 13.5 x 59 | 13.5 x 59 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 |
| vessels per rotor | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| Cat. No. | 2 x 1063-6 (6 pcs.) | | | 6305 | 1054-A | 1054-A | - | 1054-A | 1054-A | 1054-A | - | - | - | - | - |

Vessels

| | | | | | | |
|------------------------|---|----------|----------|----------|----------|----------|
| | | | | | | |
| capacity in ml | 1.6 – 5 | 4 – 7 | 8 | 8.5 – 10 | 5 | 15 |
| Ø x L in mm | 13 x 75 | 13 x 100 | 16 x 125 | 16 x 100 | 17 x 59 | 17 x 120 |
| max. RCF ²⁾ | 3,300 | 4,146 | 4,146 | 4,146 | 3,180 | 4,146 |
| radius in mm | 82 | 103 | 103 | 103 | 79 | 103 |
| Cat. No. | blood collection / urine vessels | | | - | - | - |




Adapter

| | | | | | | |
|--------------------|---------------|-----------|-----------|-----------|-----------|-----------|
| | | | | | | |
| boring Ø x L in mm | 13.5 x 60 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 |
| vessels per rotor | 12 | 12 | 6 | 12 | 12 | 6 |
| Cat. No. | 1054-A | - | - | - | - | - |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 12-PLACE | 1615



Rotor

| | |
|----------------------------------|-----------------------------------|
| max. RPM max. RCF | 12,000 min ⁻¹ 16,582 |
| max. capacity | 12 x 15 ml |
| run-up run-down, braked in sec | 40 40 |
| angle max. noise level | 35° 52 dB (A) |
| temperature in °C ¹⁾ | -2 |
| Cat. No. | 1615 |



Vessels

| | | | | | | | | | | | | | | |
|------------------------|------------------|-------------------------|---------|----------------------------|------------|---------|----------|---|-----------|---------|---------|---------|------------|----------|
| | | | | | | | | | | | | | | |
| capacity in ml | 0.5 | 1.5 | 2.0 | 4 | 5 | 6 | 15 | 1.1 - 1.4 | 2.6 - 2.9 | 2.7 - 3 | 4.5 - 5 | 4.9 | 7.5 - 10 | 10 |
| Ø x L in mm | 10.7 x 46 | 11 x 38 | 11 x 38 | 10 x 88 | 12/13 x 75 | 12 x 82 | 17 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 11 x 92 | 13 x 90 | 15/16 x 92 | 15 x 102 |
| max. RCF ²⁾ | 11,108 | 10,947 | 10,947 | 14,006 | 13,201 | 13,201 | 16,582 | 13,201 | 13,201 | 13,201 | 16,582 | 16,582 | 16,582 | 16,582 |
| radius in mm | 69 | 68 | 68 | 87 | 82 | 82 | 103 | 82 | 82 | 82 | 103 | 103 | 103 | 103 |
| Cat. No. | Pediatric | microliter tubes | | tubes ²⁾ | | | | blood collection / urine vessels | | | | | | |



Adapter

| | | | | | | | | | | | | | | |
|--------------------|----------------------------|---------|---------|-------------|---------------|---------------|-----------|---------------|---------------|---------------|-----------|-----------|-----------|-----------|
| | | | | | | | | | | | | | | |
| boring Ø x L in mm | 11 x 35 | 11 x 35 | 11 x 35 | 11.5 x 67.5 | 13.5 x 59 | 13.5 x 59 | 17.7 x 88 | 13.5 x 59 | 13.5 x 59 | 13.5 x 59 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 |
| vessels per rotor | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| Cat. No. | 2 x 1063-6 (6 pcs.) | | | 6305 | 1054-A | 1054-A | - | 1054-A | 1054-A | 1054-A | - | - | - | - |

Vessels

| | | | | | | |
|------------------------|---|----------|----------|----------|----------|----------|
| | | | | | | |
| capacity in ml | 1.6 - 5 | 4 - 7 | 8.5 - 10 | 8 | 5 | 15 |
| Ø x L in mm | 13 x 75 | 13 x 100 | 16 x 100 | 16 x 125 | 17 x 59 | 17 x 120 |
| max. RCF ²⁾ | 13,201 | 16,582 | 16,582 | 16,582 | 12,718 | 15,455 |
| radius in mm | 82 | 103 | 103 | 103 | 79 | 96 |
| Cat. No. | blood collection / urine vessels | | | - | - | - |



Adapter

| | | | | | | |
|--------------------|---------------|-----------|-----------|-----------|-------------|----------------------------|
| | | | | | | |
| boring Ø x L in mm | 13.5 x 59 | 17.7 x 88 | 17.7 x 88 | 17.7 x 88 | 17 x 25 | 17 x 104 |
| vessels per rotor | 12 | 12 | 12 | 6 | 12 | 6 |
| Cat. No. | 1054-A | - | - | - | 1064 | 1647 ²⁵⁾ |


1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

25) Adapter (set), 6-place: For conical 15 ml tubes with screw cap, remove carriers from rotor and replace them with adapters.

— ANGLE ROTOR, 8-PLACE | 1418

Rotor



| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,500 min ⁻¹ 3,305 |
| max. capacity | 8 x 50 ml |
| run-up run-down, braked in sec | 30 31 |
| angle max. noise level | 45° 54 dB (A) |
| temperature in °C ¹⁾ | -5 |
| Cat. No. | 1418 |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|----------|--------|---------|---------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| | | | | | | | | | | | | | | | |
| capacity in ml | 5 | 15 | 1.1-1.4 | 2.6-2.9 | 2.7-3 | 9-10 | 1.6-5 | 4-7 | 8.5-10 | 12 | 15 | 50 | 12 | 50 | 50 |
| Ø x L in mm | 12/13x75 | 17x100 | 8x66 | 13x65 | 11x66 | 16x92 | 13x75 | 13x100 | 16x100 | 17x102 | 17x120 | 29x115 | 17x100 | 29x115 | 29x107 |
| max. RCF ²⁾ | 2,762 | 3,215 | 2,762 | 2,762 | 2,762 | 3,215 | 2,762 | 3,215 | 3,215 | 3,215 | 3,283 | 3,147 | 3,215 | 3,147 | 3,147 |
| radius in mm | 122 | 142 | 122 | 122 | 122 | 142 | 122 | 146 | 142 | 142 | 145 | 139 | 142 | 139 | 139 |

Cat. No.

| tubes ²⁾ | blood collection / urine vessels | | | | | | | | | | tubes with screw cap | | | | |
|---------------------|----------------------------------|----------|----------|----------|--------|----------|--------|--------|--------|--------|----------------------|-----------|--------|--|--|
| + 1054-A | + 0716 | + 1054-A | + 1054-A | + 1054-A | + 0716 | + 1054-A | + 0716 | + 0716 | + 0716 | + 0716 | + E2109 | + E2110-A | + 0716 | | |



Carrier

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 17.4x91 | 17.4x91 | 17.4x91 | 17.4x91 | 17.4x91 | 17.4x91 | 17.4x91 | 17.4x91 | 17.4x91 | 17.4x91 | 17.4x91 | 30.2x92 | 17.4x91 | 30.2x92 | 30.2x92 |
| vessels per rotor | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 8 | 32 | 8 | 8 |
| Cat. No. | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1467 | 1468 | 1467 | 1468 | 1468 |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

PACKAGES

UNIVERSAL 320 BLOOD TUBE PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--------------------------------|------|----------------------|-------------|---------------|-------|-------|
| - 1 x UNIVERSAL 320 centrifuge | 1401 | 28 | 1.6 - 7 | 13 x 90 / 100 | 5,000 | 3,913 |
| - 1 x swing-out rotor, 4-place | 1494 | 28 | 4 - 10 | 16 x 75 / 100 | 5,000 | 3,913 |
| - 4 x bucket | 1425 | | | | | |
| - 4 x adapter, 7-place | 1438 | | | | | |
| - 4 x adapter, 7-place | 1441 | | | | | |
| 1401SET1 | | | | | | |



UNIVERSAL 320 BLOOD TUBE PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--------------------------------|------|----------------------|-------------|---------------|-------|-------|
| - 1 x UNIVERSAL 320 centrifuge | 1401 | 28 | 1.6 - 7 | 13 x 90 / 100 | 4,500 | 3,215 |
| - 1 x swing-out rotor, 4-place | 1554 | 20 | 4 - 10 | 16 x 75 / 100 | 4,500 | 3,215 |
| - 4 x bucket | 1560 | | | | | |
| - 4 x lid (bioseal) | 1561 | | | | | |
| - 4 x adapter, 7-place | 1589 | | | | | |
| - 4 x adapter, 5-place | 1588 | | | | | |
| 1401SET2 | | | | | | |



UNIVERSAL 320 CONICAL PACKAGE 3

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|-------|----------------------|-------------|-----------|-------|-------|
| - 1 x UNIVERSAL 320 centrifuge | 1401 | 16 | 15 | 17 x 120 | 4,500 | 3,305 |
| - 1 x swing-out rotor, 4-place | 1324 | 4 | 50 | 29 x 115 | 4,500 | 3,260 |
| - 4 x bucket | 1398 | | | | | |
| - 4 x adapter, 4-place (conical) | 1483A | | | | | |
| - 4 x adapter, 1-place (conical) | 1484 | | | | | |
| 1401SET3 | | | | | | |



UNIVERSAL 320 R CONICAL PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|------|----------------------|-------------|-----------|-------|-------|
| - 1 x UNIVERSAL 320 R centrifuge | 1406 | 16 | 15 | 17 x 120 | 4,500 | 3,328 |
| - 1 x swing-out rotor, 4-place | 1554 | 4 | 50 | 30 x 115 | 4,500 | 3,328 |
| - 4 x bucket | 1560 | | | | | |
| - 4 x lid (bioseal) | 1561 | | | | | |
| - 4 x adapter, 2-place (conical) | 1577 | | | | | |
| - 4 x adapter, 1-place (conical) | 1579 | | | | | |
| 1406SET1 | | | | | | |



UNIVERSAL 320 R BLOOD TUBE PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|------|----------------------|-------------|---------------|-------|-------|
| - 1 x UNIVERSAL 320 R centrifuge | 1406 | 28 | 1.6 - 7 | 13 x 90 / 100 | 5,000 | 3,913 |
| - 1 x swing-out rotor, 4-place | 1494 | 28 | 4 - 10 | 16 x 75 / 100 | 5,000 | 3,913 |
| - 4 x bucket | 1425 | | | | | |
| - 4 x adapter, 7-place | 1438 | | | | | |
| - 4 x adapter, 7-place | 1441 | | | | | |
| 1406SET2 | | | | | | |



UNIVERSAL 320 R CONICAL PACKAGE 3

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|-------|----------------------|-------------|---------------|-------|-------|
| - 1 x UNIVERSAL 320 R centrifuge | 1406 | 20 | 1.6 - 7 | 13 x 90 / 100 | 4,000 | 2,558 |
| - 1 x swing-out rotor, 4-place | 1324 | 16 | 4 - 10 | 16 x 75 / 100 | 4,000 | 2,522 |
| - 4 x bucket | 1398 | | | | | |
| - 4 x adapter, 4-place (conical) | 1483A | | | | | |
| - 4 x adapter, 1-place (conical) | 1484 | | | | | |
| 1406SET3 | | | | | | |



UNIVERSAL 320 R BLOOD TUBE PACKAGE 4

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|------|----------------------|-------------|-----------|-------|-------|
| - 1 x UNIVERSAL 320 R centrifuge | 1406 | 16 | 15 | 17 x 120 | 4,500 | 3,305 |
| - 1 x swing-out rotor, 4-place | 1624 | 4 | 50 | 29 x 115 | 4,500 | 3,260 |
| - 4 x bucket | 1481 | | | | | |
| - 4 x lid (bioseal) | 1492 | | | | | |
| - 4 x adapter, 5-place | 1383 | | | | | |
| - 4 x adapter, 4-place | 1348 | | | | | |
| 1406SET4 | | | | | | |



UNIVERSAL 320 R BLOOD TUBE PACKAGE 5

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|------|----------------------|-------------|---------------|-------|-------|
| - 1 x UNIVERSAL 320 R centrifuge | 1406 | 28 | 1.1 - 7 | 13 x 90 / 100 | 4,500 | 3,215 |
| - 1 x swing-out rotor, 4-place | 1554 | 20 | 4 - 10 | 17 x 100 | 4,500 | 3,215 |
| - 4 x bucket | 1560 | | | | | |
| - 4 x lid (biobio) | 1561 | | | | | |
| - 4 x adapter, 7-place | 1589 | | | | | |
| - 4 x adapter, 5-place | 1588 | | | | | |
| 1406SET5 | | | | | | |



UNIVERSAL 320 R BLOOD TUBE PACKAGE 6

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|------|----------------------|-------------|---------------|-------|-------|
| - 1 x UNIVERSAL 320 R centrifuge | 1406 | 32 | 1.6 - 7 | 13 x 90 / 100 | 5,000 | 4,025 |
| - 1 x swing-out rotor, 4-place | 1494 | 24 | 8.5 - 15 | 17 x 100 | 5,000 | 3,941 |
| - 4 x bucket | 1427 | | | | | |
| - 4 x lid (bioseal) | 1421 | | | | | |
| - 4 x adapter, 8-place | 1732 | | | | | |
| - 4 x adapter, 6-place | 5231 | | | | | |
| 1406SET6 | | | | | | |



ROTINA 380 | 380 R

High speed with space saving design

High performance unit supporting a wide array of accessories for multiple applications in just one rotor. Its size and performance make it the ideal benchtop centrifuge for most clinical, research and industrial laboratories. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (ROTINA 380 R).

— FEATURES

- RPM: 50 - 15,000 min⁻¹ – adjustable in increments of 10
- RCF: 50 - 24,400 – adjustable in increments of 1
- Max. capacity: 4 x 290 ml
- Choice of 8 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Max. noise level of 54 dB(A) with rotor 1760
- Easy operation with keypad and control knob
- 98 program memories for more individuality
- 9 individual acceleration and 10 deceleration stages
- Model 380 R coolable from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Hematological laboratories
- Small blood centers
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research
- Forensic laboratories
- Paternity testing laboratories
- Environmental testing laboratories
- Cell culture laboratories



Centrifuge packages for the model can be found on [page 105](#)



More information about the control panel can be found on [page 202](#)

CYTO

Cyto system available for this model. More information on [page 180](#)



according to regulation (EU) 2017/746



ROTINA 380





ROTINA 380 R

TECHNICAL DATA


| | ROTINA 380 non-refrigerated | ROTINA 380 R refrigerated |
|--|--|--|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 – 60 Hz |
| consumption | 650 VA | 1,300 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 4 x 290 ml | 4 x 290 ml |
| max. RPM | 15,000 min ⁻¹ | 15,000 min ⁻¹ |
| max. RCF | 24,400 | 24,400 |
| running time | 1 – 99 h: 59 min: 59 sec, ∞ continuous run, short cycle mode | 1 – 99 h: 59 min: 59 sec, ∞ continuous run, short cycle mode |
| dimensions (WxDxH) | 457x600x418 mm | 457x750x418 mm |
| weight | approx. 51 kg | approx. 81 kg |
| noise level | 54 dB (A) with rotor 1760 | 54 dB (A) with rotor 1760 |
| temperature control, infinitely variable | - | from -20 to +40 °C |
| Cat. No. | 1701 | 1706 |
| 100 – 127 V 1 ~ / 50 – 60 Hz *) | 1701-01 | 1706-01 |
| consumption | 700 VA | 1,400 VA |
| emission, immunity | FCC class B | FCC class B |
| weight | approx. 58.5 kg | approx. 88.5 kg |

*) Other voltages on request.

AVAILABLE ROTORS


| SWING-OUT ROTORS | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|--------------------------|-------|--------------------------------------|---------------|---------------|------|
|  | swing-out rotor, 4-place | 90° | 5,000 min ⁻¹ | 4x290 ml | 1754 | 96 |
| | swing-out rotor, 4-place | 90° | 4,000 min ⁻¹ | 4x290 ml | 1798 | 98 |
| | swing-out rotor, 6-place | 90° | 4,000 min ⁻¹ | 6x50 ml | 1726 | 100 |
| | swing-out rotor, 2-place | 90° | 4,000 min ⁻¹ | 10 plates | 1760 | 102 |
| | swing-out rotor, 2-place | 90° | 5,100 min ⁻¹ | 10 plates | 1770 | 102 |
| ANGLE ROTORS | | | | | | |
|  | angle rotor, 6-place | 45° | 10,000 l 11,000 min ⁻¹ | 6x94 ml | 1720 | 103 |
| | angle rotor, 6-place | 45° | 10,000 l 11,000 min ⁻¹ | 6x94 ml | 1792 | 104 |
| | angle rotor, 30-place | 45° | 15,000 min ⁻¹ | 30x2 ml | 1789-A | 105 |


SWING-OUT ROTOR, 4-PLACE | 1754


| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 5,000 min ⁻¹ 4,863 |
| max. capacity | 4 x 290 ml |
| run-up run-down, braked in sec | 42 27 |
| angle max. noise level | 90° 60 dB (A) |
| temperature in °C ¹⁾ | 0 |
| Cat. No. | 1754 |


| | |
|--|-------------|
|  | |
| Bucket | |
| lid bioseal ⁵⁾ | 1751 |
| Cat. No. | 1752 |



| | |
|--|--|
|  | |
| Vessels | |
| capacity in ml | 1.5 2.0 3 4 5 6 7 9 15 20 25 45 50 94 100 |
| Ø x L in mm | 11 x 38 11 x 38 10 x 60 12 x 60 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 21 x 100 24 x 100 31 x 100 34 x 100 38 x 106 40 x 115 |
| max. RCF ²⁾ | top / bottom 3,494 / 4,779 3,494 / 4,779 4,779 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,807 4,640 |
| radius in mm | top / bottom 125 / 171 125 / 171 171 167 167 167 167 167 167 167 167 167 167 172 166 |
| Cat. No. | microliter tubes tubes ²⁾ |

| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 11.2x39.5 11.2x39.5 11.2x39.5 12.5x56 12.5x56 12.5x56 12.5x56 17.5x62 17.5x62 25.5x81 25.5x81 35.5x81 35.5x81 38.5x80 41x97 |
| vessels per rotor | 144 144 72 96 96 96 96 52 52 24 24 12 12 8 4 |
| Cat. No. | 1761 1761 1761 1762-A 1762-A 1762-A 1762-A 1763-A 1763-A 1764 1764 1765 1765 1777 1767 |

| | |
|--|--|
|  | |
| Vessels | |
| capacity in ml | 100 250 1.1–1.4 2.6–2.9 2.7–3 4.5–5 4.5–5 4.5–5 4.9 4.9 7.5–8.2 9–10 10 1.6–5 4–7 |
| Ø x L in mm | 44 x 100 65 x 115 8 x 66 13 x 65 11 x 66 15 x 75 11 x 92 11 x 92 13 x 90 13 x 90 15 x 92 16 x 92 15 x 102 13 x 75 13 x 100 |
| max. RCF ²⁾ | 4,640 4,640 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 4,668 |
| radius in mm | 166 166 167 167 167 167 167 167 167 167 167 167 167 167 167 |
| Cat. No. | tubes ²⁾ blood collection tubes / urine tubes |


| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 45 x 87 66 x 104.5 9 x 49 13.5 x 54 12.5 x 56 17.5 x 62 12.5 x 56 13.2 x 72 13.5 x 54 13.2 x 72 17.5 x 62 17.5 x 62 17.5 x 62 13.5 x 54 13.5 x 54 |
| vessels per rotor | 4 4 96 64 96 52 96 76 64 76 52 52 52 64 64 |
| Cat. No. | 1766 1768 1781 1783-A 1762-A 1763-A 1762-A 1787 1783-A 1787 1763-A 1763-A 1763-A 1783-A 1783-A |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.


5) Tested by TÜV in conformity with DIN EN 61010, section 2-020.


SWING-OUT ROTOR, 4-PLACE | 1754


| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 5,000 min ⁻¹ 4,863 |
| max. capacity | 4 x 290 ml |
| run-up run-down, braked in sec | 42 27 |
| angle max. noise level | 90° 60 dB (A) |
| temperature in °C ¹⁾ | 0 |
| Cat. No. | 1754 |


| | |
|--|-------------|
|  | |
| Bucket | |
| lid bioseal ⁵⁾ | 1751 |
| Cat. No. | 1752 |



| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 4 – 7 4 – 7 8 8.5 – 10 5 15 50 12 25 30 50 50 14 10 30 |
| Ø x L in mm | 13x100 16x75 16x125 16x100 17x59 17x120 29 x 115 17x100 25x90 25x110 29x115 29x115 16,5x106 16x80 26x95 |
| max. RCF ²⁾ | 4,668 4,668 4,668 4,668 4,863 4,863 4,863 4,696 4,528 4,528 4,752 4,752 4,668 4,668 4,807 |
| radius in mm | 167 167 167 167 174 174 174 168 162 162 170 170 167 167 172 |
| Cat. No. | blood collection tubes / urine tubes - tubes with screw cap |


| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 13.2x72 17.5x62 17.5x62 17.5x62 17x52 17x84 30x84 17x78 26.5x72 26.5x72 30x80 30x80 17.5x62 17.5x62 26.5x70 |
| vessels per rotor | 76 52 12 52 32 36 16 36 20 20 16 16 52 52 24 |
| Cat. No. | 1787 1763-A 1763-A 1763-A 1738 1771-A 1772-A 1773 1779 1779 1774-A 1774-A 1763-A 1763-A 1775 |

| | |
|--|--|
|  | |
| Vessels | |
| capacity in ml | 50 85 94 175 175 200 225 250 290 |
| Ø x L in mm | 29x107 38x106 38x106 61 x 118 62 x 144 60 x 130 61 x 137 62 x 122 62 x 137 |
| max. RCF ²⁾ | 4,752 4,807 4,807 4,863 4,863 4,863 4,863 4,863 4,863 |
| radius in mm | 170 172 172 174 174 174 174 174 174 |
| Cat. No. | tubes with screw cap Falcon Nalgene Nunc® Falcon 5127 ²⁴⁾ - ²⁴⁾ |

| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 30 x 80 38.5 x 80 38.5 x 80 62 x 111 62 x 111 62 x 111 62 x 111 62 x 100 62 x 100 |
| vessels per rotor | 16 8 8 4 4 4 4 4 4 |
| Cat. No. | 1774-A 1777 1777 1782 1778 1778 1782 1769 1769 |

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 1752 or 5051 cannot be closed with lid 1751 or 5053.
- Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- Adapter must be loaded as illustrated.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 1798




Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,898 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 24 17 |
| angle max. noise level | 90° 55 dB (A) |
| temperature in °C ¹⁾ | -8 |
| Cat. No. | 1798 |

Bucket

| | |
|-----------------|-------------|
| lid | 5053 |
| Cat. No. | 5051 |



Vessels

| | | | | | | | | | | | | | | |
|------------------------|-------------------------|---------------|---------|---------|---------------------------|---------|---------|----------|----------|----------|----------|----------|----------|----------|
| capacity in ml | 1.5 | 2 | 1.5 | 2 | 3 | 5 | 6 | 7 | 9 | 15 | 25 | 50 | 100 | 100 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 11 x 38 | 11 x 38 | 10 x 60 | 12 x 75 | 12 x 82 | 12 x 100 | 14 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 40 x 115 | 44 x 100 |
| max. RCF ²⁾ | 1,950 / 2,826 | 1,950 / 2,826 | 2,826 | 2,826 | 2,737 | 2,773 | 2,773 | 2,755 | 2,773 | 2,755 | 2,755 | 2,755 | 2,755 | 2,755 |
| radius in mm | 109 / 158 | 109 / 158 | 158 | 158 | 153 | 155 | 155 | 154 | 155 | 154 | 154 | 154 | 154 | 154 |
| Cat. No. | microliter tubes | | | | tubes²⁾ | | | | | | | | | |

Adapter

| | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------------------|-------------|---------------------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.5 x 37 | 12.5 x 37 | 11.5 x 50 | 11.5 x 50 | 11 x 41.5 | 12.5 x 39.5 | 12.5 x 39.5 | 12.5 x 82.5 | 16 x 47.5 | 17.5 x 82.5 | 26 x 82.5 | 36 x 82.5 | 42 x 86 | 45.5 x 86 |
| vessels per rotor | 160 | 160 | 64 | 64 | 80 | 80 | 80 | 80 | 48 | 48 | 20 | 8 | 4 | 4 |
| Cat. No. | 5257 | 5257 | 5281 | 5281 | 5267 | 5227 | 5227 | 5247¹⁵⁾ | 5264 | 5248¹⁵⁾ | 5242 | 5243 | 5249 | 5262 |

Vessels

| | | | | | | | | | | | | | |
|------------------------|---|---------|---------|---------|---------|---------|---------|---------|----------|---------|----------|---------|----------|
| capacity in ml | 1.1–1.4 | 2.6–2.9 | 2.7–3 | 4–5.5 | 4.5–5 | 4.9 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8.5–10 |
| Ø x L in mm | 8 x 66 | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 |
| max. RCF ²⁾ | 2,737 | 2,808 | 2,773 | 2,773 | 2,773 | 2,808 | 2,773 | 2,755 | 2,755 | 2,808 | 2,808 | 2,773 | 2,755 |
| radius in mm | 153 | 157 | 155 | 155 | 155 | 157 | 155 | 154 | 154 | 157 | 157 | 155 | 154 |
| Cat. No. | blood collection tubes / urine tubes | | | | | | | | | | | | |

Adapter

| | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 11 x 41.5 | 13.5 x 49.5 | 12.5 x 39.5 | 16 x 47.5 | 12.5 x 39.5 | 13.5 x 49.5 | 16 x 47.5 | 17.6 x 82.5 | 17.6 x 82.5 | 13.5 x 49.5 | 13.5 x 49.5 | 16 x 47.5 | 17.5 x 82.5 |
| vessels per rotor | 80 | 48 | 80 | 48 | 80 | 48 | 48 | 44 | 44 | 48 | 48 | 48 | 48 |
| Cat. No. | 5267 | 5268 | 5227 | 5264 | 5227 | 5268 | 5264 | 5258 | 5258 | 5268 | 5268 | 5264 | 5248 |

Vessels

| | | | | | | | |
|------------------------|-----------------------------|----------|----------|----------|----------|----------|----------------------|
| capacity in ml | 30 | 50 | 15 | 12 | 30 | 50 | 1–8 |
| Ø x L in mm | 25 x 110 | 29 x 115 | 17 x 120 | 17 x 100 | 25 x 110 | 29 x 115 | simple / multiple |
| max. RCF ²⁾ | 2,755 | 2,826 | 2,898 | 2,898 | 2,755 | 2,755 | 1,735 / 2,737 |
| radius in mm | 154 | 158 | 162 | 162 | 154 | 154 | 97 / 153 |
| Cat. No. | tubes with screw cap | | | | | | cyto chambers |

Adapter


| | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 26 x 82.5 | 30 x 90 | 17.2 x 90 | 17.2 x 90 | 26 x 82.5 | 36 x 82.5 | - |
| vessels per rotor | 20 | 8 | 28 | 28 | 20 | 8 | 8 |
| Cat. No. | 5266 | 5259 | 6306 | 6306 | 5266 | 5243 | 5280 |

CYTO

Cyto system available for this model.
More information on [page 178](#)


- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.3) When using these tubes, bucket 1752 or 5051 cannot be closed with lid 1751 or 5053.
- 15) Also available with decanting aid. (Cat. No. 5247-91 or 5248-91).


SWING-OUT ROTOR, 4-PLACE | 1798


| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,000 min ⁻¹ 3,095 |
| max. capacity | 4 x 290 ml |
| run-up run-down, braked in sec | 24 17 |
| angle max. noise level | 90° 56 dB (A) |
| temperature in °C ¹⁾ | -8 |
| Cat. No. | 1798 |


| | |
|--|-------------|
|  | |
| Bucket | |
| lid bioseal ⁵⁾ | 5093 |
| Cat. No. | 5092 |





| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 5 6 7 15 25 50 100 100 250 15 30 50 12 25 30 |
| Ø x L in mm | 12x75 12x82 12x100 17x100 24x100 34x100 44x100 40x115 65x115 17x120 25x110 29x115 17x100 25x90 25x110 |
| max. RCF ²⁾ | 3,005 3,005 3,005 2,952 2,898 2,952 2,952 2,952 3,095 3,095 2,898 3,095 3,005 2,826 2,898 |
| radius in mm | 168 168 168 165 162 165 165 165 173 173 162 173 168 158 162 |
| Cat. No. | tubes ²⁾ tubes with screw cap |

| | |
|--|--|
|  | |
| Adapter | |
| boring Ø x L in mm | 12.8x42 12.8x42 12.8x79.5 17.5x56.7 25.5x74 35.5x77.5 45.5x76.5 42x76.5 65x103 17x74 25.5x82 30x85 17.5x79.5 26x73 25.5x74 |
| vessels per rotor | 48 48 48 32 16 4 4 4 4 28 16 8 28 12 16 |
| Cat. No. | 5128 5128 5120 5136 5122 5124 5125 5126 1791 5129 5122 5123 5121 5134 5122 |

| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 50 10 250 290 1.1–1.4 2.7–3 4–4.5 4.9 7.5–8.2 9–10 10 1.6–5 4–7 4–7 8 |
| Ø x L in mm | 29x115 16 x 80 61 x 122 62 x 137 8 x 66 11x66 15x75 13x90 15x92 16x92 15x102 13x75 16x75 13x100 16x125 |
| max. RCF ²⁾ | 3,023 2,952 3,095 3,095 2,952 2,952 2,952 2,952 2,952 2,952 2,952 2,952 2,952 3,005 3,059 |
| radius in mm | 169 165 173 173 165 165 165 165 165 165 165 165 165 168 171 |
| Cat. No. | tubes with screw cap 5127 ^{2 4)} - ^{2 4)} blood collection tubes / urine tubes |

| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 30x99 17.5x56.7 63x90 63x90 12.8x54.5 12.8x54.5 17.5x56.7 17.5x56.7 17.5x56.7 17.5x56.7 17.5x56.7 12.8x54.5 17.5x56.7 12.8x79.5 17.5x79.5 |
| vessels per rotor | 8 32 4 4 48 48 32 32 32 32 32 48 32 48 28 |
| Cat. No. | 5135 5136 6319 6319 5138 5138 5136 5137 5136 5136 5136 5138 5136 5120 5121⁴⁾ |

| | |
|---|----------|
|  | |
| Vessels | |
| capacity in ml | 8.5 – 10 |
| Ø x L in mm | 16x100 |
| max. RCF ²⁾ | 2,952 |
| radius in mm | 165 |
| Cat. No. | - |

| | |
|---|-------------|
|  | |
| Adapter | |
| boring Ø x L in mm | 17.5x56.7 |
| vessels per rotor | 32 |
| Cat. No. | 5136 |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.5) When using these tubes, bucket 5092 cannot be closed with lid 5053.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 6-PLACE | 1726



Rotor

| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,808 |
| max. capacity | 6 x 50 ml |
| run-up run-down, braked in sec | 19 18 |
| angle temperature in °C ¹⁾ | 90° -6 |
| Cat. No. | 1726 |



Vessels

| | | | | | | | | | | | | | |
|------------------------|---------------------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|----------|----------|----------------------|
| capacity in ml | 5 | 5 | 6 | 7 | 9 | 15 | 20 | 25 | 45 | 50 | 8.5 – 10 | 30 | 1 – 8 |
| Ø x L in mm | 12x75 | 12x75 | 12x82 | 12x100 | 14x100 | 17x100 | 21x100 | 24x100 | 31x100 | 34x100 | 16x100 | 26x95 | simple / multiple |
| max. RCF ²⁾ | 2,576 | 2,522 | 2,665 | 2,665 | 2,665 | 2,665 | 2,719 | 2,808 | 2,719 | 2,808 | 2,665 | 2,808 | 2,003 |
| radius in mm | 144 | 141 | 149 | 149 | 149 | 149 | 152 | 157 | 152 | 157 | 149 | 157 | 112 |
| Cat. No. | tubes²⁾ | | | | | | | | | | | - | cyto chambers |



Carrier

| | | | | | | | | | | | | | |
|--------------------|----------------|-------------|----------------|----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.5x74 | 14.5x63 | 12.5x74 | 12.5x74 | 14.6x74 | 17.6x74 | 21.5x74 | 25x78 | 32x74 | 35x78 | 17.6x74 | 25x78 | - |
| vessels per rotor | 24 | 102 | 24 | 24 | 30 | 24 | 12 | 12 | 6 | 6 | 24 | 12 | 6 |
| Cat. No. | 1369-91 | 1372 | 1369-92 | 1369-92 | 1370 | 1369 | 1346 | 1745 | 1345 | 1746 | 1369 | 1745 | 1660 |

CYTO

Cyto system available for this model.
More information on [page 180](#)

SWING-OUT ROTOR, 6-PLACE | 1726



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,808 |
| max. capacity | 42 x 15 ml |
| run-up run-down, braked in sec | 19 18 |
| angle max. noise level | 90° 54 dB (A) |
| temperature in °C ¹⁾ | -6 |
| Cat. No. | 1726 |



Carrier

| | |
|-----------------|-------------|
| Cat. No. | 1742 |
|-----------------|-------------|



Vessels

| | | | | | | | | | | |
|------------------------|-----------------------|---|-------|---------|-------|--------|-------|-------|--------|----------|
| capacity in ml | 15 | 2.6–2.9 | 4–4.5 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 8.5–10 | 15 |
| Ø x L in mm | 17x100 | 13x65 | 15x75 | 15x92 | 16x92 | 15x102 | 13x75 | 16x75 | 16x100 | 17x120 |
| max. RCF ²⁾ | 2,808 | 2,683 | 2,683 | 2,808 | 2,808 | 2,808 | 2,683 | 2,683 | 2,808 | 2,808 |
| radius in mm | 157 | 150 | 150 | 157 | 157 | 157 | 150 | 150 | 157 | 157 |
| Cat. No. | -²⁾ | blood collection tubes / urine tubes | | | | | | | | - |




Spacer

| | | | | | | | | | | |
|--------------------|-----------|-------------|-------------|-----------|-----------|-----------|-------------|-------------|-----------|-----------|
| boring Ø x L in mm | 17.6 x 78 | 17.6 x 78 | 17.6 x 78 | 17.6 x 78 | 17.6 x 78 | 17.6 x 78 | 17.6 x 78 | 17.6 x 78 | 17.6 x 78 | 17.6 x 78 |
| vessels per rotor | 42 | 42 | 42 | 42 | 42 | 18 | 42 | 42 | 42 | 18 |
| Cat. No. | - | 0716 | 0716 | - | - | - | 0716 | 0716 | - | - |

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Adaptor must be loaded as illustrated.


— SWING-OUT ROTOR, 6-PLACE | 1726

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,000 min ⁻¹ 2,325 |
| max. capacity | 72 x 4 ml |
| run-up run-down, braked in sec | 19 18 |
| angle max. noise level | 90° 54 dB (A) |
| temperature in °C ¹⁾ | -6 |
| Cat. No. | 1726 |




| | |
|--|-------------|
|  | |
| Bucket | |
| Cat. No. | 1366 |




| | |
|---|--|
|  | |
| Vessels | |
| capacity in ml | 1.5 2.0 1 3 4 |
| Ø x L in mm | 11 x 38 11 x 38 6 x 45 10 x 60 12 x 60 |
| max. RCF ²⁾ | 2,325 2,325 2,308 2,290 2,290 |
| radius in mm | 130 130 129 128 128 |
| Cat. No. | microliter tubes Rhesus tubes ²⁾ |



| | |
|---|--|
|  | |
| Adapter | |
| boring Ø x L in mm | 11.5 x 38 11.5 x 38 6.5 x 23 10.5 x 23 12.5 x 42 |
| vessels per rotor | 54 54 180 72 72 |
| Cat. No. | 5277 5277 1357 1327 1326 |


— SWING-OUT ROTOR, 6-PLACE | 1726

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,000 min ⁻¹ 2,808 |
| max. capacity | 60 x 9 ml |
| run-up run-down, braked in sec | 19 18 |
| angle max. noise level | 90° 54 dB (A) |
| temperature in °C ¹⁾ | -6 |
| Cat. No. | 1726 |




| | |
|--|-------------|
|  | |
| Carrier | |
| Cat. No. | 1741 |




| | |
|---|--|
|  | |
| Vessels | |
| capacity in ml | 9 1.1 – 1.4 4.5 – 5 4.9 4 – 7 |
| Ø x L in mm | 14 x 100 8 x 66 11 x 92 13 x 90 13 x 100 |
| max. RCF ²⁾ | 2,773 2,773 2,808 2,808 2,808 |
| radius in mm | 155 155 157 157 157 |
| Cat. No. | - ²⁾ blood collection tubes / urine tubes |





















| | |
|---|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 14.6 x 78 14.6 x 78 14.6 x 78 14.6 x 78 14.6 x 78 |
| vessels per rotor | 60 60 60 60 60 |
| Cat. No. | 0701 0701 - - - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 16) Packaging unit 10 pieces.
- 21) Adapter must be loaded as illustrated.


SWING-OUT ROTOR, 2-PLACE | 1760

| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 4,000 min ⁻¹ 2,397 |
| max. capacity | 10 plates |
| run-up run-down, braked in sec | 30 23 |
| angle max. noise level | 90° 54 dB (A) |
| temperature in °C ¹⁾ | -8 |
| Cat. No. | 1760 |




| | | | | | | | | | |
|---------------------------|---|---|---|---|---|---|---|---|---|
| Plates |  |  |  |  |  |  |  |  |  |
| W x D x H in mm | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 128x86x46 | 128x86x83 | 84x59x11 | 124x82x20 | - |
| capacity in ml | - | - | - | - | - | - | - | - | 0.2 |
| max. RCF ²⁾ | 2,397 | 2,397 | 2,397 | 2,397 | 2,397 | 2,397 | 2,397 | 2,397 | 2,397 |
| radius in mm | 134 | 134 | 134 | 134 | 134 | 134 | 134 | 134 | 134 |
| Cat. No. | MTP | MTP | CP | DWP | MS | QP | Microtest plates | PCR plate | PCR strips |
| + |  |  |  |  |  |  |  |  |  |
| Bucket | | | | | | | | | |
| boring Ø x L in mm | - | - | - | - | - | - | - | - | - |
| plates / strips per rotor | 10 | 8 | 6 | 2 | 2 | 2 | 4 | 2 | 48 x 8 |
| Cat. No. | 1753-A | 1753-A | 1753-A | 1753-A | 1753-A | 1753-A | 1753-A | 1753-A+1485 | 1753-A+1485 |















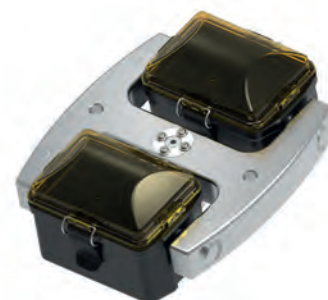



SWING-OUT ROTOR, 2-PLACE | 1770

| | |
|---|---|
| Rotor |  |
| max. RPM max. RCF | 5,100 min ⁻¹ 3,926 |
| capacity in ml | 10 plates |
| run-up run-down, braked in sec | 65 30 |
| angle temperature in °C ¹⁾ | 90° -3 |
| Cat. No. | 1770 |




| | |
|---------------------------|--|
| Bucket |  |
| lid bioseal ³⁾ | 4627 |
| Cat. No. | 4745 |



| | | | | | | | | | |
|---------------------------|---|---|---|---|---|---|---|---|---|
| Plates |  |  |  |  |  |  |  |  |  |
| W x D x H in mm | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 128x86x46 | 128x86x83 | 84x59x11 | 124x82x20 | - |
| Ø x L in mm | - | - | - | - | - | - | - | - | 0,2 |
| max. RCF ²⁾ | 3,926 | 3,926 | 3,926 | 3,926 | 3,926 | 3,926 | 3,926 | 3,926 | 3,926 |
| radius in mm | 135 | 135 | 135 | 135 | 135 | 135 | 135 | 135 | 135 |
| Cat. No. | MTP | MTP | CP | DWP | MS | QP | Microtest plates | PCR plate | PCR strips |
| + |  |  |  |  |  |  |  |  |  |
| Removal frame | | | | | | | | | |
| boring Ø x L in mm | - | - | - | - | - | - | - | - | - |
| plates / strips per rotor | 10 | 8 | 8 | 2 | 2 | 2 | 4 | 2 | 24 x 8 |
| Cat. No. | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 + 1485 | 4626 + 1485 |

— ANGLE ROTOR, 6-PLACE | 1720



Rotor

| | | |
|----------------------------------|--------------------|---|
| max. RPM | ROTINA 380 380 R | 10,000 min ⁻¹ 11,000 min ⁻¹ |
| max. RCF | | 13,528 16,369 |
| max. capacity | | 6 x 94 ml |
| run-up / run-down, braked in sec | | 39 / 36 45 / 44 |
| angle max. noise level | | 45° 59 dB (A) |
| temperature in °C ¹⁾ | | +1 |
| Cat. No. | | 1720 |



Vessels

| | | | | | | | | | | | | | | | | |
|------------------------|------------------|---------|---------------------|----------|----------|----------|---|---------|----------|----------------------|----------|---------|---------|----------|----------|--------|
| | | | | | | | | | | | | | | | | |
| capacity in ml | 1.5 | 2.0 | 15 | 25 | 50 | 94 | 7.5 – 8.2 | 9 – 10 | 8.5 – 10 | 15 | 50 | 10 | 30 | 50 | 85 | |
| Ø x L in mm | 11 x 38 | 11 x 38 | 17 x 100 | 24 x 100 | 34 x 100 | 38 x 102 | 15 x 92 | 16 x 92 | 16 x 100 | 17 x 120 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | |
| max. RCF ²⁾ | ROTINA 380 | 12,969 | 12,969 | 12,745 | 12,410 | 13,304 | 13,528 | 12,745 | 12,745 | 12,745 | 13,081 | 12,745 | 12,410 | 12,410 | 12,969 | 13,528 |
| max. RCF ²⁾ | ROTINA 380 R | 15,692 | 15,692 | 15,422 | 15,016 | 16,098 | 16,369 | 15,422 | 15,422 | 15,422 | 15,828 | 15,422 | 15,016 | 15,016 | 15,692 | 16,369 |
| radius in mm | 116 | 116 | 114 | 111 | 119 | 121 | 114 | 114 | 114 | 117 | 114 | 111 | 111 | 116 | 121 | |
| Cat. No. | microliter tubes | | tubes ²⁾ | | | | blood collection tubes / urine tubes | | | tubes with screw cap | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 11.4 x 39 | 11.4 x 39 | 17.5 x 91.5 | 26 x 85 | 35 x 89 | 38.4 x 89.3 | 17.5 x 91.5 | 17.5 x 91.5 | 17.5 x 91.5 | 17 x 106 | 29.8 x 96.7 | 16.5 x 74 | 26 x 85 | 29 x 92 | 38.4 x 89 |
| vessels per rotor | 24 | 24 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 12 | 6 | 6 | 6 |
| Cat. No. | 1449 | 1449 | 1451 | 1447 | 1463 | - | 1451 | 1451 | 1451 | 1466 | 1454 | 1448 | 1447 | 1446 | - |



Vessels

| | | |
|------------------------|--------------|----------|
| capacity in ml | | 94 |
| Ø x L in mm | | 38 x 102 |
| max. RCF ²⁾ | ROTINA 380 | 13,528 |
| max. RCF ²⁾ | ROTINA 380 R | 16,369 |
| radius in mm | | 121 |
| Cat. No. | | - |



Adapter
















| | |
|--------------------|-----------|
| boring Ø x L in mm | 38.4 x 89 |
| vessels per rotor | 6 |
| Cat. No. | - |
















1) For cooled versions: Lowest temperature achievable with precooling and max. speed.



2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.



ANGLE ROTOR, 6-PLACE | 1792

| | | | | | |
|----------------------------------|--------------------|---|---|--|------------------|
| | |  | + |  | |
| Rotor | | | | lid bioseal⁵⁾ | |
| max. RPM | ROTINA 380 380 R | 10,000 min ⁻¹ 11,000 min ⁻¹ | | Cat. No. | INCLUSIVE |
| max. RCF | | 13,640 16,504 | | | |
| max. capacity | | 6 x 94 ml | | | |
| run-up run-down, braked in sec | | 40 / 37 48 / 44 | | | |
| angle max. noise level | | 45° 59 dB (A) | | | |
| temperature in °C ¹⁾ | | +4 | | | |
| Cat. No. | | 1792 | | | |

| | | | | | | | | | | | | | | | | |
|------------------------|--------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Vessels | | | | | | | | | | | | | | | | |
| capacity in ml | | 1.5 | 2.0 | 15 | 25 | 50 | 94 | 7.5 – 8.2 | 9 – 10 | 10 | 8.5 – 10 | 5 | 15 | 50 | 10 | 30 |
| Ø x L in mm | | 11 x 38 | 11 x 38 | 17 x 100 | 24 x 100 | 34 x 100 | 38 x 102 | 15 x 92 | 16 x 92 | 15 x 102 | 16 x 100 | 17 x 59 | 17 x 120 | 29 x 115 | 16 x 80 | 26 x 95 |
| max. RCF ²⁾ | ROTINA 380 | 13,081 | 13,081 | 12,857 | 12,522 | 13,416 | 13,640 | 12,857 | 12,857 | 12,857 | 12,857 | 12,745 | 13,081 | 13,304 | 12,857 | 12,522 |
| max. RCF ²⁾ | ROTINA 380 R | 15,828 | 15,828 | 15,557 | 15,151 | 16,233 | 16,504 | 15,557 | 15,557 | 15,557 | 15,557 | 15,422 | 15,828 | 16,098 | 15,557 | 15,151 |
| radius in mm | | 117 | 117 | 115 | 112 | 120 | 122 | 115 | 115 | 115 | 115 | 114 | 117 | 119 | 115 | 112 |
| Cat. No. | | microliter tubes | | | tubes²⁾ | | | blood collection tubes / urine tubes | | | | - | tubes with screw cap | | | |

| | | | | | | | | | | | | | | | | |
|--------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Adapter | | | | | | | | | | | | | | | | |
| boring Ø x L in mm | | 11.4x39 | 11.4x39 | 17.5x92 | 26x85 | 35x89 | 38.2x89.6 | 17.5x92 | 17.5x92 | 17.5x92 | 17.5x92 | 17x51 | 17x106 | 29.8x97 | 16.5x74 | 26x85 |
| vessels per rotor | | 24 | 24 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 12 | 6 |
| Cat. No. | | 1449 | 1449 | 1451 | 1447 | 1463 | - | 1451 | 1451 | 1451 | 1451 | 1476 | 1466 | 1454 | 1448 | 1447 |

| | | | |
|------------------------|--------------|---|---|
| | |  |  |
| Vessels | | | |
| capacity in ml | | 50 | 85 |
| Ø x L in mm | | 29 x 107 | 38 x 106 |
| max. RCF ²⁾ | ROTINA 380 | 13,081 | 13,640 |
| max. RCF ²⁾ | ROTINA 380 R | 15,828 | 16,504 |
| radius in mm | | 117 | 122 |
| Cat. No. | | tubes with screw cap | |

| | | | |
|--------------------|--|---|---|
| | |  |  |
| Adapter | | | |
| boring Ø x L in mm | | 29 x 92 | 38.2 x 89.6 |
| vessels per rotor | | 6 | 6 |
| Cat. No. | | 1446 | - |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.


5) Tested by TÜV in conformity with DIN EN 61010, section 2-020.

ANGLE ROTOR, 30-PLACE | 1789-A

| | |
|----------------------------------|---|
| Rotor | |
| max. RPM max. RCF | 15,000 min ⁻¹ 24,400 min ⁻¹ |
| max. capacity | 30 x 2 ml |
| run-up run-down, braked in sec | 24 24 |
| angle max. noise level | 45° 60 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 1789-A |



Lid bioseal[®],
phenol-resistant
Cat. No.




INCLUSIVE



| | |
|------------------------|---|
| Vessels | |
| capacity in ml | 0.2 0.4 0.5 0.8 1.5 2 |
| Ø x L in mm | 6 x 18 6 x 45 8 x 30 8 x 45 11 x 38 11 x 38 |
| max. RCF ²⁾ | 24,400 24,400 24,400 24,400 24,400 24,400 |
| radius in mm | 97 97 97 97 97 97 |
| Cat. No. | microliter tubes |



| | |
|--------------------|---|
| Adapter | |
| boring Ø x L in mm | 6 x 40 6 x 40 8 x 40 8 x 40 10.2 x 19.3 11.2 x 40.9 |
| vessels per rotor | 30 30 30 30 30 30 |
| Cat. No. | 2024 2024 2023 2023 2031⁷⁾ - |



- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- 7) For centrifugation at high speeds, we recommend to use form-fitting, phenol-resistant adapters. Cat. No. 2031.
- 17) Packaging unit 15 pieces.

PACKAGES

| ROTINA 380 BLOOD TUBE PACKAGE 1 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---------------------------------|--------|-------------------|-------------|---------------|-------|-------|
| - 1 x ROTINA 380 centrifuge | 1701 | 64 | 1.6 - 7 | 13 x 90 / 100 | 5,000 | 4,668 |
| - 1 x swing-out rotor, 4-place | 1754 | 52 | 4 - 10 | 17 x 100 | 5,000 | 4,668 |
| - 4 x bucket | 1752 | | | | | |
| - 4 x lid (bioseal) | 1751 | | | | | |
| - 4 x adapter, 16-place | 1783-A | | | | | |
| - 4 x adapter, 13-place | 1763-A | | | | | |
| 1701SET1 | | | | | | |



| ROTINA 380 CONICAL PACKAGE 2 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTINA 380 centrifuge | 1701 | 36 | 15 | 17 x 120 | 5,000 | 4,863 |
| - 1 x swing-out rotor, 4-place | 1754 | 16 | 50 | 29 x 115 | 5,000 | 4,863 |
| - 4 x bucket | 1752 | | | | | |
| - 4 x adapter, 9-place (conical) | 1771-A | | | | | |
| - 4 x adapter, 4-place (conical) | 1772-A | | | | | |
| 1701SET2 | | | | | | |



| ROTINA 380 R CONICAL PACKAGE 1 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTINA 380 R centrifuge | 1706 | 36 | 15 | 17 x 120 | 5,000 | 4,863 |
| - 1 x swing-out rotor, 4-place | 1754 | 16 | 50 | 29 x 115 | 5,000 | 4,863 |
| - 4 x bucket | 1752 | | | | | |
| - 4 x adapter, 9-place (conical) | 1771-A | | | | | |
| - 4 x adapter, 4-place (conical) | 1772-A | | | | | |
| 1706SET1 | | | | | | |



| ROTINA 380 R BLOOD TUBE PACKAGE 2 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------------|--------|-------------------|-------------|---------------|-------|-------|
| - 1 x ROTINA 380 R centrifuge | 1706 | 64 | 1.6 - 10 | 13 x 90 / 100 | 5,000 | 4,668 |
| - 1 x swing-out rotor, 4-place | 1754 | 52 | 4 - 15 | 17 x 100 | 5,000 | 4,668 |
| - 4 x bucket | 1752 | | | | | |
| - 4 x lid (bioseal) | 1751 | | | | | |
| - 4 x adapter, 16-place | 1783-A | | | | | |
| - 4 x adapter, 13-place | 1763-A | | | | | |
| 1706SET2 | | | | | | |



ROTINA 420 | 420 R

Many solutions – one rotor

This compact benchtop centrifuge has been developed for large sample volumes. It has a maximum capacity of 4 x 600 ml bottles, 140 blood tubes, 16 microtiter plates or 52 x 15 ml conical tubes, all on a single cost-effective rotor. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (ROTINA 420 R).

— FEATURES

- RPM: 50 - 15,000 min⁻¹ – adjustable in increments of 10
- RCF: 50 - 24,400 – adjustable in steps of 1
- Max. capacity: 4 x 600 ml
- High-performance with first-class equipment
- Choice of 5 rotors
- IVDR-conform according to regulation (EU) 2017/746
- Max. noise level of 51 dB(A) with rotor 4790-A
- Easy operation with keypad and control knob
- 98 program memories for more individuality
- 9 individual acceleration and 10 deceleration stages
- Model 420 R coolable from -20 to +40 °C (with pre-cooling function)

— FIELDS OF APPLICATION

- Hospitals
- Hematological laboratories
- Blood centers
- Pharmaceutical laboratories
- Food analyzing laboratories
- University / Academic research



Centrifuge packages for the model can be found on [page 113](#)



More information about the control panel can be found on [page 202](#)

CYTO

Cyto system available for this model. More information on [page 180](#)



according to regulation (EU) 2017/746



ROTINA 420



ROTINA 420 R



TECHNICAL DATA

| | ROTINA 420 non-refrigerated | ROTINA 420 R refrigerated |
|--|---|---|
| voltage *) | 200–240 V 1 ~ | 200–240 V 1 ~ |
| frequency | 50–60 Hz | 50 Hz |
| consumption | 870 VA | 1,600 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 4 x 600 ml | 4 x 600 ml |
| max. RPM | 15,000 min ⁻¹ | 15,000 min ⁻¹ |
| max. RCF | 24,400 | 24,400 |
| running time | 1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode | 1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode |
| dimensions (WxDxH) | 506x650x423 mm | 713x654x423 mm |
| weight | approx. 75 kg | approx. 108 kg |
| noise level | 51 dB (A) with rotor 4790-A | 50 dB (A) with rotor 4790-A |
| temperature control, infinitely variable | - | from -20 to +40 °C |
| Cat. No. | 4701 | 4706 |
| 100–127 V 1 ~ / 50–60 Hz *) | 4701-01 | 4706-01 |
| consumption | 900 VA | 1,850 VA |
| emission, immunity | FCC class B | FCC class B |
| weight | approx. 84 kg | approx. 117 kg |




*) Other voltages on request.

AVAILABLE ROTORS


SWING-OUT ROTORS



| | angle | max. RPM | max. capacity | Cat. No. | page |
|--|-------|-------------------------|---------------|---------------|------|
|  swing-out rotor, 4-place | 90° | 4,800 min ⁻¹ | 4x600 ml | 4784-A | 108 |
|  swing-out rotor, 4-place | 90° | 4,000 min ⁻¹ | 4x290 ml | 4753 | 110 |

ANGLE ROTORS


| | | | | | |
|---|-----|--------------------------|----------|---------------|-----|
|  angle rotor, 4-place | 25° | 9,500 min ⁻¹ | 4x250 ml | 4795 | 112 |
|  angle rotor, 6-place | 45° | 11,000 min ⁻¹ | 6x94 ml | 4794 | 112 |
|  angle rotor, 30-place | 45° | 15,000 min ⁻¹ | 30x2 ml | 4790-A | 113 |


SWING-OUT ROTOR, 4-PLACE | 4784-A


| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,800 min ⁻¹ 4,740 |
| max. capacity | 4x600 ml |
| run-up run-down, braked in sec | 54 38 |
| angle max. noise level | 90° 56 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 4784-A |


| | |
|--|-------------|
|  | |
| Bucket with clamp lock | |
| lid bioseal ⁵⁾ | 4783 |
| Cat. No. | 4780 |
|  | |
| Bucket without clamp lock ¹⁴⁾ | |
| Cat. No. | 4785 |




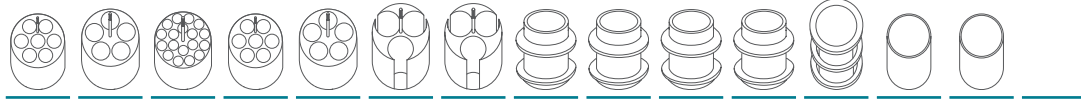
| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 1.5 2.0 3 4 4 5 6 7 15 25 50 94 100 100 250 |
| Ø x L in mm | 11 x 38 11 x 38 10 x 60 10 x 88 12 x 60 12 x 75 12 x 82 12 x 100 17 x 100 24 x 100 34 x 100 38 x 102 40 x 115 44 x 100 65 x 115 |
| max. RCF ²⁾ | 4,585 4,585 4,585 4,585 4,585 4,585 4,585 4,585 4,585 4,585 4,559 4,534 4,534 4,534 4,534 |
| radius in mm | 178 178 178 178 178 178 178 178 178 178 177 176 176 176 176 |
| Cat. No. | microliter tubes tubes ³⁾ |
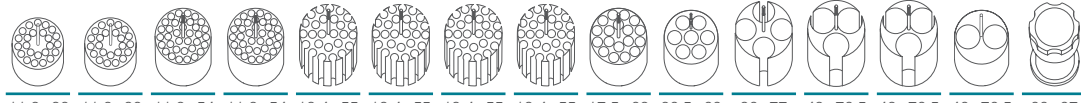
| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 11.2x38 11.2x38 11.2x54 11.2x54 13.4x55 13.4x55 13.4x55 13.4x55 17.5x62 26.5x69 36x77 42x76.5 42x76.5 46x76.5 66x97 |
| vessels per rotor | 96 96 140 140 104 104 104 104 72 28 16 12 12 8 4 |
| Cat. No. | 4773 4773 4761 4761 4762A 4762A 4762A 4762A 4763A 4764 4765 4766 4766 4767 4768 |

| | |
|--|--|
|  | |
| Vessels | |
| capacity in ml | 1.1–1.4 2.6–3.4 4–5.5 4.5–5 4.9 7.5–8.2 9–10 1.6–7 1.6–7 4–7 8 8.5–10 15 50 12 |
| Ø x L in mm | 8 x 66 13 x 65 15 x 75 11 x 92 13 x 90 15 x 92 16 x 92 13 x 75 13 x 100 16 x 75 16 x 125 16 x 100 17 x 120 29 x 115 17 x 100 |
| max. RCF ²⁾ | 4,585 4,585 4,585 4,585 4,585 4,585 4,585 4,720 4,720 4,585 4,585 4,585 4,740 4,688 4,688 |
| radius in mm | 178 178 178 178 178 178 178 178 178 178 178 178 184 182 182 |
| Cat. No. | blood collection / urine vessels - tubes with screw cap |
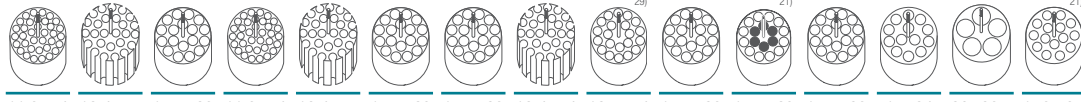
| | |
|--|---|
|  | |
| Adapter | |
| boring Ø x L in mm | 11.2x54 13.4x55 17.5x62 11.2x54 13.4x55 17.5x62 17.5x62 13.4x54 13.7x54 17.5x62 17.5x62 17.5x62 17x84 30x82.5 17.2x58.5 |
| vessels per rotor | 140 104 72 140 104 72 72 104 84 72 24 72 52 20 56 |
| Cat. No. | 4761 4762A 4763A 4761 4762A 4763A 4763A 4762A 4775A 4763A 4763A 4763A 4769A 4770A 4774A |

| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 25–30 50 10 30 50 85 94 175 175 200 225 250 400 400 600 |
| Ø x L in mm | 25x90/110 29x115 16x80 26x95 29x107 38x106 38x102 61 x 118 62 x 144 60 x 130 61 x 137 62 x 122 81 x 136 84x134 93x134 |
| max. RCF ²⁾ | 4,585 4,688 4,585 4,585 4,688 4,534 4,534 4,740 4,740 4,740 4,740 4,740 4,740 4,740 4,740 |
| radius in mm | 178 182 178 178 182 176 176 184 184 184 184 184 184 184 184 |
| Cat. No. | tubes with screw cap Falcon Nalgene Nunc® Falcon 5127 ²⁴⁾ - ²⁴⁾ - ²⁴⁾ 0551 ²⁴⁾ |

| | |
|--|--|
|  | |
| Adapter | |
| boring Ø x L in mm | 26.5x69 30x82.5 17.5x62 26.5x69 30x82.5 42x76.5 42x76.5 61x105 61.5x110 61.5x110 61x105 62x100 85x100 85x100 94x99 |
| vessels per rotor | 28 20 72 28 20 12 12 4 4 4 4 4 4 4 4 |
| Cat. No. | 4764 4770A⁴⁾ 4763A 4764 4770A⁴⁾ 4766 4766 4776 4777 4777 4776 4771 4772 4772 - |

SWING-OUT ROTOR, 4-PLACE | 4753




Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,898 |
| max. capacity | 4 x 100 ml |
| run-up run-down, braked in sec | 18 16 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C ¹⁾ | -1 |
| Cat. No. | 4753 |

Bucket

| | |
|-----------------|-------------|
| lid | 5053 |
| Cat. No. | 5051 |



Vessels

| | | | | | | | | | | | | | | |
|------------------------|-------------------------|---------------|---------|---------|---------------------------|---------|---------|----------|----------|----------|----------|----------|----------|----------|
| capacity in ml | 1.5 | 2 | 1.5 | 2 | 3 | 5 | 6 | 7 | 9 | 15 | 25 | 50 | 100 | 100 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 11 x 38 | 11 x 38 | 10 x 60 | 12 x 75 | 12 x 82 | 12 x 100 | 14 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 44 x 100 | 40 x 115 |
| max. RCF ²⁾ | 1,950 / 2,826 | 1,950 / 2,826 | 2,826 | 2,826 | 2,737 | 2,773 | 2,773 | 2,755 | 2,773 | 2,755 | 2,755 | 2,755 | 2,755 | 2,755 |
| radius in mm | 109 / 158 | 109 / 158 | 158 | 158 | 153 | 155 | 155 | 154 | 155 | 154 | 154 | 154 | 154 | 154 |
| Cat. No. | microliter tubes | | | | tubes²⁾ | | | | | | | | | |

Adapter

| | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------------------|-------------|---------------------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.5 x 37 | 12.5 x 37 | 11.5 x 50 | 11.5 x 50 | 11 x 44 | 12.5 x 39.5 | 12.5 x 39.5 | 12.5 x 82.5 | 16 x 50 | 17.5 x 82.5 | 26 x 82.5 | 36 x 82.5 | 45.5 x 82.5 | 42 x 86 |
| vessels per rotor | 160 | 160 | 64 | 64 | 80 | 80 | 80 | 80 | 48 | 48 | 20 | 8 | 4 | 4 |
| Cat. No. | 5257 | 5257 | 5281 | 5281 | 5267 | 5227 | 5227 | 5247¹⁵⁾ | 5264 | 5248¹⁵⁾ | 5242 | 5243 | 5262 | 5249 |

Vessels

| | | | | | | | | | | | | | |
|------------------------|---|---------|---------|---------|---------|---------|---------|---------|-----------------------------|---------|---------|----------------------|-------------------|
| capacity in ml | 1.1–1.4 | 2.6–3.4 | 2.7–3 | 4–5.5 | 4.5–5 | 4.9 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 8.5–10 | 1–8 |
| Ø x L in mm | 8 x 66 | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 16 x 75 | 16 x 100 | simple / multiple |
| max. RCF ²⁾ | 2,737 | 2,808 | 2,773 | 2,773 | 2,773 | 2,808 | 2,773 | 2,755 | 2,755 | 2,808 | 2,773 | 2,755 | 1,735 / 2,737 |
| radius in mm | 153 | 157 | 155 | 155 | 155 | 157 | 155 | 154 | 154 | 157 | 155 | 154 | 97 / 153 |
| Cat. No. | blood collection / urine vessels | | | | | | | | tubes with screw cap | | | cyto chambers | |

Adapter

| | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 11 x 41.5 | 13.5 x 52 | 12.5 x 37 | 16 x 50 | 12.5 x 37 | 13.5 x 52 | 16 x 50 | 17.6 x 82.5 | 17.6 x 82.5 | 13.5 x 52 | 16 x 50 | 17.5 x 82.5 | - |
| vessels per rotor | 80 | 48 | 80 | 48 | 80 | 48 | 48 | 44 | 44 | 48 | 48 | 48 | 8 |
| Cat. No. | 5267 | 5268 | 5227 | 5264 | 5227 | 5268 | 5264 | 5258 | 5258 | 5268 | 5264 | 5248 | 5280 |

Vessels

| | | | | | | |
|------------------------|-----------------------------|----------|----------|----------|----------|----------|
| capacity in ml | 15 | 30 | 50 | 12 | 30 | 50 |
| Ø x L in mm | 17 x 120 | 25 x 110 | 29 x 115 | 17 x 100 | 25 x 110 | 29 x 115 |
| max. RCF ²⁾ | 2,898 | 2,755 | 2,826 | 2,898 | 2,755 | 2,755 |
| radius in mm | 162 | 154 | 158 | 162 | 154 | 154 |
| Cat. No. | tubes with screw cap | | | | | |

Adapter

| | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17 x 90 | 26 x 82.5 | 30 x 90 | 17 x 90 | 26 x 82.5 | 36 x 82.5 |
| vessels per rotor | 28 | 20 | 8 | 28 | 20 | 8 |
| Cat. No. | 6306 | 5266 | 5259 | 6306 | 5266 | 5243 |

CYTO

Cyto system available for this model.
More information on page 180

- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, carrier 4780 cannot be closed with lid 4783.
- Please remove the spacer.
- Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- The screw cap for tube No. 0538 is available with Cat. No. 0539. Dimensions with cap 38 x 110 mm.
- With the E3905 add-on kit and the 4783 lid, the 4785 carrier can be converted at a later time to a 4780 carrier with single-hand clamp lock.
- Adapter must be loaded as illustrated.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.
- Suitable for blood collection systems with a lid larger than 17 mm in diameter.

SWING-OUT ROTOR, 4-PLACE | 4753

Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 3,095 |
| max. capacity | 4 x 250 ml |
| run-up run-down, braked in sec | 18 16 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C ¹⁾ | -1 |
| Cat. No. | 4753 |



Bucket

| | |
|---------------------------|-------------|
| lid bioseal ⁵⁾ | 5093 |
| Cat. No. | 5092 |




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------|-------|--------|--------|--------|--------|--------|--------|--------|---|---------|-------|-------|-------|-------|
| capacity in ml | 5 | 6 | 7 | 15 | 25 | 50 | 100 | 100 | 250 | 1.1–1.4 | 2.6–2.9 | 2.7–3 | 4–4.5 | 4.5–5 | 4.9 |
| Ø x L in mm | 12x75 | 12x82 | 12x100 | 17x100 | 24x100 | 34x100 | 44x100 | 40x115 | 65x115 | 8 x 66 | 13 x 65 | 11x66 | 15x75 | 11x92 | 13x90 |
| max. RCF ²⁾ | 3,005 | 3,005 | 3,005 | 2,952 | 2,898 | 2,952 | 2,952 | 2,952 | 3,095 | 2,540 | 2,540 | 2,540 | 2,952 | 3,005 | 2,952 |
| radius in mm | 168 | 168 | 168 | 165 | 162 | 165 | 165 | 165 | 173 | 142 | 142 | 142 | 165 | 168 | 165 |
| Cat. No. | tubes²⁾ | | | | | | | | | blood collection / urine vessels | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.8x42 | 12.8x42 | 13.2x79.5 | 17.5x56.7 | 25.5x75 | 35.5x77.5 | 45.5x85 | 42x76.5 | 66x103 | 12.8x54.5 | 12.8x54.5 | 12.8x54.5 | 17.5x56.7 | 13.2x79.5 | 13.5x56.7 |
| vessels per rotor | 48 | 48 | 48 | 32 | 16 | 4 | 4 | 4 | 4 | 48 | 48 | 48 | 32 | 48 | 32 |
| Cat. No. | 5128 | 5128 | 5120 | 5136 | 5122 | 5124 | 5125 | 5126 | 1791 | 5138 | 5138 | 5138 | 5136 | 5120 | 5137 |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---|-------|--------|-------|--------|-------|--------|-----------------------------|--------|--------|-------|--------|--------|---------|---------------------------|
| capacity in ml | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8.5–10 | 15 | 50 | 12 | 25 | 30 | 50 | 10 | 250 |
| Ø x L in mm | 15x92 | 16x92 | 15x102 | 13x75 | 13x100 | 16x75 | 16x100 | 17x120 | 29x115 | 17x100 | 25x90 | 25x110 | 29x115 | 16 x 80 | 61 x 122 |
| max. RCF ²⁾ | 2,952 | 2,952 | 2,952 | 2,540 | 3,005 | 2,952 | 2,952 | 3,095 | 3,095 | 3,005 | 2,826 | 2,898 | 3,023 | 2,952 | 3,095 |
| radius in mm | 165 | 165 | 165 | 142 | 168 | 165 | 165 | 173 | 173 | 168 | 158 | 162 | 169 | 165 | 173 |
| Cat. No. | blood collection / urine vessels | | | | | | | tubes with screw cap | | | | | | | 5127²⁴⁾ |




Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17.5x56.7 | 17.5x56.7 | 17.5x56.7 | 12.8x54.5 | 13.2x79.5 | 17.5x56.7 | 17.5x56.7 | 17 x 85 | 30x85 | 17.5x85 | 26x73 | 25.5x75 | 30x99 | 17.5x57.7 | 62x90 |
| vessels per rotor | 32 | 32 | 32 | 48 | 48 | 32 | 32 | 28 | 8 | 28 | 12 | 16 | 8 | 32 | 4 |
| Cat. No. | 5136 | 5136 | 5136 | 5138 | 5120 | 5136 | 5136 | 5129 | 5123 | 5121 | 5134 | 5122 | 5135 | 5136 | 6319 |



- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 5092 cannot be closed with lid 5053.
- When using these tubes, bucket 4780 or 5051 cannot be closed with lid 4783 or 5053.
- Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 4784-A



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,800 min ⁻¹ 4,096 |
| max. capacity | 16 plates |
| run-up run-down, braked in sec | 54 38 |
| angle max. noise level | 90° 56 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 4784-A |



Bucket

Cat. No.



4782



Plates

| | | | | | | | | |
|------------------------|------------|-------------|-----------|-------------|-----------|------------------------|---------------------------|-------------------|
| | | | | | | | | |
| W x D x H in mm | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 128x86x46 | 84x59x11 | 124x82x20 | - |
| capacity in ml | - | - | - | - | - | - | - | 0,2 |
| max. RCF ²⁾ | 4,096 | 4,096 | 4,096 | 4,096 | 4,096 | 4,096 | 4,096 | 4,096 |
| radius in mm | 159 | 159 | 159 | 159 | 159 | 159 | 159 | 159 |
| Cat. No. | MTP | MTP | CP | DWP | MS | Microtest plate | PCR plate 96 wells | PCR strips |



Adapter

| | | | | | | | | |
|---------------------------|----------|----------|----------|----------|----------|----------|-------------|-------------|
| boring Ø x L in mm | - | - | - | - | - | - | - | - |
| plates / strips per rotor | 16 | 16 | 12 | 4 | 4 | 8 | 4 | 48 x 8 |
| Cat. No. | - | - | - | - | - | - | 1485 | 1485 |

ANGLE ROTOR, 4-PLACE | 4795



Rotor

| | |
|----------------------------------|----------------------------------|
| max. RPM max. RCF | 9,500 min ⁻¹ 12,007 |
| max. capacity | 4x250 ml |
| run-up run-down, braked in sec | 45 55 |
| angle | 25° |
| temperature in °C ¹⁾ | +2 |
| Cat. No. | 4795 |



Vessels

| | | | | | | | | | |
|------------------------|---------------------------|----------|----------|-----------------------------|---------|----------|----------|---------------------------|----------|
| | | | | | | | | | |
| capacity in ml | 15 | 25 | 94 | 10 | 30 | 50 | 85 | 85 | 250 |
| Ø x L in mm | 17 x 100 | 24 x 100 | 38 x 106 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | 38 x 106 | 62 x 122 |
| max. RCF ²⁾ | 11,301 | 10,897 | 10,292 | 11,402 | 10,897 | 10,090 | 10,292 | 10,292 | 12,007 |
| radius in mm | 112 | 108 | 102 | 113 | 108 | 100 | 102 | 102 | 119 |
| Cat. No. | tubes²⁾ | | | tubes with screw cap | | | | 5127²⁴⁾ | |



Adapter

| | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|----------|
| boring Ø x L in mm | 17.6x83 | 26x80 | 38.6x88 | 16.6x70 | 26x80 | 29x90 | 38.6 x 88 | 38.6 x 88 | 61.5x109 |
| vessels per rotor | 28 | 12 | 4 | 32 | 12 | 4 | 4 | 4 | 4 |
| Cat. No. | 5646 | 5642 | 5644 | 5641 | 5642 | 5643 | 5644 | 5644 | - |

ANGLE ROTOR, 6-PLACE | 4794



Rotor















| | |
|----------------------------------|-----------------------------------|
| max. RPM max. RCF | 11,000 min ⁻¹ 16,504 |
| max. capacity | 6 x 94 ml |
| run-up run-down, braked in sec | 40 63 |
| angle max. noise level | 45° 58 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 4794 |















+








Lid bioseal⁵⁾








| | |
|-----------------|------------------|
| Cat. No. | INCLUSIVE |
|-----------------|------------------|



| Vessels |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| capacity in ml | 1.5 | 2 | 3 | 6 | 15 | 25 | 50 | 85 | 94 | 7.5 – 8,2 | 9 – 10 | 10 | 8.5 – 10 | 5 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 10 x 60 | 17 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 38 x 106 | 38 x 102 | 15 x 92 | 16 x 92 | 15 x 102 | 16 x 100 | 17 x 51 |
| max. RCF ²⁾ | 15,828 | 15,828 | 15,828 | 15,557 | 15,557 | 15,151 | 16,233 | 16,504 | 16,504 | 15,557 | 15,557 | 15,557 | 15,557 | 16,504 |
| radius in mm | 117 | 117 | 117 | 115 | 115 | 112 | 120 | 122 | 122 | 115 | 115 | 115 | 117 | 122 |
| Cat. No. | microliter tubes | | | | tubes²⁾ | | | | | blood collection / urine vessels | | | | - |

| Adapter |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| boring Ø x L in mm | 11.4 x 39 | 11.4 x 39 | 11.4 x 39 | 17.5 x 91,5 | 17.5 x 91,5 | 26 x 85 | 35 x 89,3 | 38,2 x 89,6 | 38,2 x 89,6 | 17,5 x 91,5 | 17,5 x 91,5 | 17,5 x 91,5 | 17,5 x 91,5 | 17 x 51 |
| vessels per rotor | 24 | 24 | 24 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |
| Cat. No. | 1449 | 1449 | 1449 | 1451 | 1451 | 1447 | 1463 | - | - | 1451 | 1451 | 1451 | 1451 | 1476 |

| Vessels |  |  |  |  |  |  |  |
|------------------------|---|---|---|---|---|---|---|
| capacity in ml | 4 | 15 | 20 | 10 | 30 | 50 | 85 |
| Ø x L in mm | 12 x 40 | 17 x 120 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 |
| max. RCF ²⁾ | 15,557 | 15,828 | 16,098 | 15,557 | 15,151 | 15,828 | 16,504 |
| radius in mm | 115 | 117 | 119 | 115 | 112 | 117 | 122 |
| Cat. No. | tubes with screw cap | | | | | | |


| Adapter |  |  |  |  |  |  |  |
|--------------------|---|---|---|---|---|---|---|
| boring Ø x L in mm | 15,6 x 30 | 17 x 106 | 29,8 x 96,7 | 16,5 x 74 | 26 x 85 | 29 x 92 | 38,2 x 89,6 |
| vessels per rotor | 24 | 6 | 6 | 12 | 6 | 6 | 6 |
| Cat. No. | 1403 | 1466 | 1454 | 1448 | 1447 | 1446 | - |


1) For cooled versions: Lowest temperature achievable with precooling and max. speed.


2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.

— ANGLE ROTOR, 30-PLACE | 4790-A


| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 15,000 min ⁻¹ 24,400 |
| max. capacity | 30 x 2 ml |
| run-up run-down, braked in sec | 19 24 |
| angle max. noise level | 45° 50 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 4790-A |


Lid bioseal⁹⁾, phenol-resistant
Cat. No.




INCLUSIVE



| | |
|---|---|
|  | |
| Vessels | |
| capacity in ml | 0.2 0.4 0.5 0.8 1.5 2 |
| Ø x L in mm | 6x18 6x45 8x30 8x45 11x38 11x38 |
| max. RCF ²⁾ | 24,400 24,400 24,400 24,400 24,400 24,400 |
| radius in mm | 97 97 97 97 97 97 |
| Cat. No. | microliter tubes |



| | |
|---|--|
|  | |
| Adapter | |
| boring Ø x L in mm | 6x40 6x40 8x40 8x40 10.2x19.3 11.2x40.9 |
| vessels per rotor | 30 30 30 30 30 30 |
| Cat. No. | 2024 2024 2023 2023 2031⁷⁾ - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.

— PACKAGES

| ROTINA 420 BLOOD TUBE PACKAGE 1 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--|--------|-------------------|-------------|---------------|-------|-------|
| - 1 x ROTINA 420 centrifuge | 4701 | 104 | 1.6 - 7 | 13 x 90 / 100 | 4,800 | 4,585 |
| - 1 x swing-out rotor, 4-place | 4784-A | 72 | 4 - 15 | 17 x 100 | 4,800 | 4,585 |
| - 4 x bucket | 4780 | | | | | |
| - 4 x lid (bioseal) | 4783 | | | | | |
| - 4 x adapter, 26-place | 4762A | | | | | |
| - 4 x adapter, 18-place | 4763A | | | | | |
| 4701SET1 | | | | | | |




| ROTINA 420 CONICAL PACKAGE 2 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-------------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTINA 380 centrifuge | 4701 | 52 | 15 | 17 x 120 | 4,800 | 4,740 |
| - 1 x swing-out rotor, 4-place | 4784-A | 20 | 50 | 29 x 115 | 4,800 | 4,688 |
| - 4 x bucket | 4785 | | | | | |
| - 4 x adapter, 13-place (conical) | 4769A | | | | | |
| - 4 x adapter, 5-place (conical) | 4770A | | | | | |
| 4701SET2 | | | | | | |



| ROTINA 420 R BLOOD TUBE PACKAGE 1 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--|--------|-------------------|-------------|---------------|-------|-------|
| - 1 x ROTINA 420 centrifuge | 4706 | 104 | 1.6 - 7 | 13 x 90 / 100 | 4,800 | 4,585 |
| - 1 x swing-out rotor, 4-place | 4784-A | 72 | 4 - 15 | 17 x 100 | 4,800 | 4,585 |
| - 4 x bucket | 4780 | | | | | |
| - 4 x lid (bioseal) | 4783 | | | | | |
| - 4 x adapter, 26-place | 4762A | | | | | |
| - 4 x adapter, 18-place | 4763A | | | | | |
| 4706SET1 | | | | | | |



| ROTINA 420 R CONICAL PACKAGE 2 | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---------------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTINA 420 R centrifuge | 4706 | 52 | 15 | 17 x 120 | 4,800 | 4,740 |
| - 1 x swing-out rotor, 4-place | 4784-A | 20 | 50 | 29 x 115 | 4,800 | 4,688 |
| - 4 x bucket | 4785 | | | | | |
| - 4 x adapter, 13-place (conical) | 4769A | | | | | |
| - 4 x adapter, 5-place (conical) | 4770A | | | | | |
| 4706SET2 | | | | | | |



ROTANTA 460 | 460 R

Superior benchtop for multi-purpose use

This powerful unit is capable of virtually any application you choose. It is able to spin high sample volumes of blood tubes, conical tubes, plates and bottles. Speciality buckets are able to accommodate 450 ml blood bags. This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (ROTANTA 460 R).

FEATURES

- RPM: 50 - 15,000 min⁻¹ – adjustable in increments of 10
- RCF: 50 - 24,400 min⁻¹ – adjustable in increments of 1
- Max. Capacity: 4 x 1,000 ml
- Choice of 8 rotors
- Medical device according to regulation (EU) 2017/745
- 9 individual acceleration and 19 deceleration stages
- Easy operation with keypad and control knob
- 98 program memories for more individuality
- Model 460 R coolable from -20 to +40 °C (with pre-cooling function)

FIELDS OF APPLICATION

- Hospitals
- Blood centers
- Cell Culture Laboratories



Centrifuge packages for the model can be found on [page 130](#)



More information about the control panel can be found on [page 202](#)



ROTANTA 460



ROTANTA 460 R






TECHNICAL DATA

| | ROTANTA 460 non-refrigerated | ROTANTA 460 R refrigerated |
|--|---|---|
| voltage *) | 220 – 240 V 1 ~ | 220 – 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 Hz |
| consumption | 1,000 VA | 1,800 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 4 x 1,000 ml | 4 x 1,000 ml |
| max. RPM | 15,000 min ⁻¹ | 15,000 min ⁻¹ |
| max. RCF | 24,400 | 24,400 |
| running time | 1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode | 1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode |
| dimensions (WxDxH) | 554x706x456 mm | 770x706x456 mm |
| weight | approx. 101 kg | approx. 141 kg |
| noise level | 46 dB (A) with rotor 4474 | 58 dB (A) with rotor 4474 |
| temperature control, infinitely variable | - | from -20 to +40 °C |
| Cat. No. | 5650 | 5660 |
| 100 – 127 V 1 ~ / 60 Hz *) | 5650-01 | 5660-01 |
| consumption | 1,100 VA | 2,000 VA |
| emission, immunity | FCC class B | FCC class B |
| weight | approx. 111 kg | approx. 151 kg |




*) Other voltages on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

| | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|--------------------------|-------|--|---------------|---------------|------|
|  | swing-out rotor, 4-place | 90° | 4,600 min ⁻¹ | 4 x 750 ml | 5699-R | 116 |
|  | swing-out rotor, 4-place | 90° | 3,800 min ⁻¹ | 4 x 1,000 ml | 5654 | 123 |
|  | swing-out rotor, 6-place | 90° | 4,000 min ⁻¹ | 6 x 290 ml | 4446 | 125 |
|  | swing-out rotor, 4-place | 90° | 2,000 min ⁻¹ | 4 x 100 ml | 4474 | 127 |
|  | swing-out rotor, 2-place | 90° | 5,900 min ⁻¹ / 6,200 min ⁻¹ | 12 plates | 5622 | 127 |

ANGLE ROTORS

| | | | | | | |
|---|-----------------------|-----|--|------------|---------------|-----|
|  | angle rotor, 30-place | 45° | 15,000 min ⁻¹ | 30 x 2 ml | 4489-A | 128 |
|  | angle rotor, 6-place | 25° | 8,500 min ⁻¹ / 9,500 min ⁻¹ | 6 x 250 ml | 5645 | 128 |
|  | angle rotor, 6-place | 45° | 11,500 min ⁻¹ | 6 x 94 ml | 5615 | 129 |

SWING-OUT ROTOR, 4-PLACE | 5699-R


Rotor

| | |
|---|---------------------------------|
| max. RPM max. RCF ²⁾ | 4,600 min ⁻¹ 5,063 |
| max. capacity | 4x250 ml |
| run-up run-down, braked in sec | 79 88 |
| angle temperature in °C ¹⁾ | 90° +10 |
| Cat. No. | 5699-R |



Bucket

| | |
|---------------------------|---------------|
| lid bioseal ³⁾ | 5627 |
| Cat. No. | 5625-A |




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|-------------------------|---------------|---------|---------------------------|---------|---------|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| capacity in ml | 1.5 | 2.0 | 3 | 4 | 4 | 5 | 6 | 7 | 15 | 25 | 75 | 94 | 100 | 100 | 250 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 10 x 60 | 10 x 88 | 12 x 60 | 12 x 75 | 12 x 82 | 12 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 38 x 110 | 44 x 100 | 40 x 115 | 65 x 115 |
| max. RCF ²⁾ | 3,572 / 4,637 | 3,572 / 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,495 | 4,495 | 4,637 | 4,495 | 4,495 |
| radius in mm | 151/196 | 151/196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 190 | 190 | 196 | 190 | 190 |
| Cat. No. | microliter tubes | | | tubes²⁾ | | | | | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 11 x 84 | 11 x 84 | 11 x 84 | 11 x 84 | 13.5 x 84 | 13.5 x 84 | 13.5 x 84 | 13.5 x 84 | 17.5 x 84 | 26.5 x 84 | 36 x 80 | 42 x 80 | 46 x 84 | 42 x 80 | 66 x 80 |
| vessels per rotor | 224 | 224 | 120 | 120 | 80 | 80 | 80 | 80 | 68 | 24 | 12 | 12 | 8 | 12 | 4 |
| Cat. No. | 4730 | 4730 | 4730 | 4730 | 4732 | 4732 | 4732 | 4732 | 4733 | 4734 | 4735 | 4736 | 4737 | 4736 | 4738 |




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---|---------|---------|---------|---------|---------|---------|---------|----------|---------|----------|---------|----------|-----------------------------|----------|
| capacity in ml | 1.1–1.4 | 2.6–2.9 | 2.7–3 | 4–5.5 | 4.5–5 | 4.9 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8.5–10 | 14 | 15 |
| Ø x L in mm | 8 x 66 | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 | 16.5 x 106 | 17 x 120 |
| max. RCF ²⁾ | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 |
| radius in mm | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 |
| Cat. No. | blood collection / urine vessels | | | | | | | | | | | | | tubes with screw cap | |




Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|
| boring Ø x L in mm | 11 x 84 | 13.5 x 84 | 13.5 x 84 | 17.5 x 84 | 13.5 x 84 | 13.5 x 84 | 17.5 x 84 | 17.5 x 84 | 17.5 x 84 | 13.5 x 84 | 13.5 x 84 | 17.5 x 84 | 17.5 x 84 | 17 x 80 | 17 x 80 |
| vessels per rotor | 120 | 80 | 80 | 68 | 80 | 80 | 68 | 68 | 68 | 80 | 80 | 68 | 68 | 48 | 48 |
| Cat. No. | 4730 | 4732 | 4732 | 4733 | 4732 | 4732 | 4733 | 4733 | 4733 | 4732 | 4732 | 4733 | 4733 | 4739⁴⁾ | 4739 |




Vessels

| | | | | | | | | | | |
|------------------------|-----------------------------|----------|---------|----------|----------|---------|---------|----------|----------|----------|
| capacity in ml | 50 | 12 | 25 | 30 | 50 | 10 | 30 | 50 | 85 | 94 |
| Ø x L in mm | 30 x 115 | 17 x 100 | 25 x 90 | 25 x 110 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | 38 x 110 |
| max. RCF ²⁾ | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,495 | 4,495 |
| radius in mm | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 190 | 190 |
| Cat. No. | tubes with screw cap | | | | | | | | | |

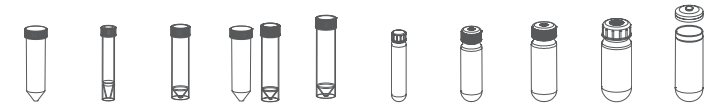

Adapter

| | | | | | | | | | | |
|--------------------|-------------|--------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 30 x 80 | 17 x 80 | 26.5 x 84 | 26.5 x 84 | 30 x 80 | 17.5 x 84 | 26.5 x 84 | 30 x 80 | 42 x 80 | 42 x 80 |
| vessels per rotor | 20 | 48 | 24 | 24 | 20 | 68 | 24 | 20 | 12 | 12 |
| Cat. No. | 4740 | 4739⁴⁾ | 4734 | 4734 | 4740 | 4733 | 4734 | 4740 | 4736 | 4736 |



- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.

SWING-OUT ROTOR, 4-PLACE | 5699-R


Rotor

| | |
|---|---------------------------------|
| max. RPM max. RCF ²⁾ | 4,600 min ⁻¹ 4,779 |
| max. capacity | 4 x 750 ml |
| run-up run-down, braked in sec | 90 95 |
| angle temperature in °C ¹⁾ | 90° +7 |
| Cat. No. | 5699-R |



Bucket with clamp lock

| | |
|---------------------------|------|
| lid bioseal ³⁾ | 4883 |
| Cat. No. | 4880 |




Bucket without clamp lock¹⁴⁾

| | |
|----------|------|
| Cat. No. | 4885 |
|----------|------|




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|------------------|---------------|---------|---------------------|---------|---------|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| capacity in ml | 1.5 | 2.0 | 3 | 4 | 4 | 5 | 6 | 7 | 15 | 25 | 45 | 50 | 94 | 100 | 100 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 10 x 60 | 10 x 88 | 12 x 60 | 12 x 75 | 12 x 82 | 12 x 100 | 17 x 100 | 24 x 100 | 31 x 100 | 34 x 100 | 38 x 110 | 40 x 115 | 44 x 100 |
| max. RCF ²⁾ | 3,572 / 4,637 | 3,572 / 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,495 | 4,495 | 4,495 | 4,495 | 4,637 |
| radius in mm | 151/196 | 151/196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 196 | 190 | 190 | 190 | 190 | 196 |
| Cat. No. | microliter tubes | | | tubes ²⁾ | | | | | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|---------|---------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|---------|---------|---------|---------|---------|
| boring Ø x L in mm | 11 x 84 | 11 x 84 | 11 x 84 | 11 x 84 | 13.5 x 84 | 13.5 x 84 | 13.5 x 84 | 13.5 x 84 | 17.5 x 84 | 26.5 x 84 | 36 x 80 | 36 x 80 | 42 x 80 | 42 x 80 | 46 x 84 |
| vessels per rotor | 192 | 192 | 96 | 96 | 76 | 76 | 76 | 76 | 76 | 28 | 16 | 16 | 12 | 12 | 8 |
| Cat. No. | 4830 | 4830 | 4830 | 4830 | 4832 | 4832 | 4832 | 4832 | 4833 | 4834 | 4835 | 4835 | 4836 | 4836 | 4837 |




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|----------|----------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|----------|---------|---------|
| capacity in ml | 250 | 1.1–1.4 | 2.6–2.9 | 2.6–2.9 | 2.7–3 | 4–5.5 | 4.5–5 | 4.9 | 4.9 | 7.5–8.2 | 9–10 | 9–10 | 10 | 1.6–5 | 1.6–5 |
| Ø x L in mm | 65 x 115 | 8 x 66 | 13 x 65 | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 13 x 90 | 13 x 90 | 15 x 92 | 16 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 75 |
| max. RCF ²⁾ | 4,495 | 4,637 | 4,116 | 4,637 | 4,637 | 4,637 | 4,637 | 4,637 | 4,684 | 4,637 | 4,684 | 4,637 | 4,637 | 4,116 | 4,637 |
| radius in mm | 190 | 196 | 174 | 196 | 196 | 196 | 196 | 196 | 198 | 196 | 198 | 196 | 196 | 174 | 196 |
| Cat. No. | - 2) | blood collection / urine vessels | | | | | | | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| boring Ø x L in mm | 66 x 80 | 11 x 84 | 13.2 x 61 | 13.5 x 84 | 13.5 x 84 | 17.5 x 84 | 13.5 x 84 | 13.5 x 84 | 13.2 x 61 | 17.5 x 84 | 17.5 x 61 | 17.5 x 84 | 17.5 x 84 | 13.2 x 61 | 13.5 x 84 |
| vessels per rotor | 4 | 96 | 108 | 76 | 76 | 76 | 76 | 76 | 108 | 76 | 88 | 76 | 76 | 108 | 76 |
| Cat. No. | 4838 | 4830 | 4847 | 4832 | 4832 | 4833 | 4832 | 4832 | 4847 ⁴⁾ | 4833 | 4848 | 4833 | 4833 | 4847 | 4832 |




Vessels

| | | | | | | | | | | | | | |
|------------------------|----------------------------------|---------|---------|----------|----------|----------|------------|----------------------|----------|----------|----------|---------|----------|
| capacity in ml | 4–7 | 4–7 | 4–7 | 8 | 8.5–10 | 8.5–10 | 14 | 15 | 50 | 50 | 12 | 25 | 30 |
| Ø x L in mm | 13 x 100 | 16 x 75 | 16 x 75 | 16 x 125 | 16 x 100 | 16 x 100 | 16.5 x 106 | 17 x 120 | 29 x 115 | 29 x 115 | 17 x 100 | 25 x 90 | 25 x 110 |
| max. RCF ²⁾ | 4,684 | 4,637 | 4,684 | 4,637 | 4,637 | 4,684 | 4,637 | 4,637 | 4,708 | 4,637 | 4,637 | 4,637 | 4,637 |
| radius in mm | 198 | 196 | 198 | 196 | 196 | 198 | 196 | 196 | 199 | 196 | 196 | 196 | 196 |
| Cat. No. | blood collection / urine vessels | | | | | | | tubes with screw cap | | | | | |



Adapter

| | | | | | | | | | | | | | |
|--------------------|--------------------|-----------|-----------|-----------|-----------|-----------|--------------------|---------|-----------|---------|--------------------|-----------|-----------|
| boring Ø x L in mm | 13.2 x 61 | 17.5 x 84 | 17.5 x 61 | 17.5 x 84 | 17.5 x 84 | 17.5 x 61 | 17 x 80 | 17 x 80 | 30 x 96.5 | 30 x 80 | 17 x 80 | 26.5 x 84 | 26.5 x 84 |
| vessels per rotor | 108 | 76 | 88 | 76 | 76 | 88 | 56 | 56 | 28 | 20 | 56 | 28 | 28 |
| Cat. No. | 4847 ⁴⁾ | 4833 | 4848 | 4833 | 4833 | 4848 | 4839 ⁴⁾ | 4839 | 5647 | 4840 | 4839 ⁴⁾ | 4834 | 4834 |



SWING-OUT ROTOR, 4-PLACE | 5699-R


Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,600 min ⁻¹ 4,779 |
| max. capacity | 4 x 750 ml |
| run-up run-down, braked in sec | 90 95 |
| angle | 90° |
| temperature in °C ¹⁾ | +7 |
| Cat. No. | 5699-R |



Bucket with clamp lock

| | |
|---------------------------|-------------|
| lid bioseal ⁵⁾ | 4883 |
| Cat. No. | 4880 |



Bucket without clamp lock¹⁴⁾

| | |
|-----------------|-------------|
| Cat. No. | 4885 |
|-----------------|-------------|




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|----------------------|----------|---------|---------|---------|----------|----------|----------|----------|---------------------|----------|---------------------|---------------------|----------|----------|
| capacity in ml | 50 | 50 | 10 | 10 | 30 | 50 | 50 | 85 | 94 | 250 | 500 | 600 | 750 | 450 | 750 |
| Ø x L in mm | 30 x 115 | 29 x 115 | 16 x 80 | 16 x 80 | 26 x 95 | 29 x 107 | 29 x 107 | 38 x 106 | 38 x 110 | 61 x 122 | 96 x 147 | 93 x 134 | 97 x 152 | 97 x 110 | 96 x 135 |
| max. RCF ²⁾ | 4,708 | 4,637 | 4,637 | 4,684 | 4,637 | 4,637 | 4,708 | 4,495 | 4,495 | 4,779 | 4,779 | 4,779 | 4,779 | 4,779 | 4,779 |
| radius in mm | 199 | 196 | 196 | 198 | 196 | 196 | 199 | 190 | 190 | 202 | 202 | 202 | 202 | 202 | 202 |
| Cat. No. | tubes with screw cap | | | | | | | | | 5127 ²⁴⁾ | Corning® | 0551 ²⁴⁾ | 0512 ²⁴⁾ | 4447 | 4234-A |




Adapter

| | | | | | | | | | | | | | | | | |
|--------------------|--------------------------|--------------------------|-------------|-------------|-------------|--------------------------|--------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 30 x 96.5 | 30 x 80 | 17.5 x 84 | 17.5 x 61 | 26.5 x 84 | 30 x 80 | 30 x 96.5 | 42 x 80 | 42 x 80 | 62 x 100 | 98 x 100 | 94 x 95 | 98 x 100 | 98 x 100 | 98 x 100 | 98 x 100 |
| vessels per rotor | 28 | 20 | 76 | 88 | 28 | 20 | 28 | 12 | 12 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Cat. No. | 5647⁴⁾ | 4840⁴⁾ | 4833 | 4848 | 4834 | 4840⁴⁾ | 5647⁴⁾ | 4836 | 4836 | 4841 | 4845 | 4846 | 4845 | 4845 | 4845 | 4845 |

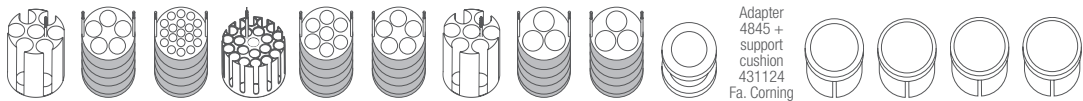


Vessels

| | | | | | | | |
|------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| capacity in ml | 30 | 50 | 40 | 160 | 200 | 200 | 200 |
| Ø x L in mm | - | - | - | - | - | - | - |
| max. RCF ²⁾ | 4,613 ²⁷⁾ | 4,613 ²⁷⁾ | 4,613 ²⁷⁾ | 4,613 ²⁷⁾ | 4,613 ²⁷⁾ | 4,613 ²⁷⁾ | 4,613 ²⁷⁾ |
| radius in mm | 195 | 195 | 195 | 195 | 195 | 195 | 195 |
| Cat. No. | Falcon® | Corning® | Nunc® | Nunc® | Falcon® | Greiner® | Nunc® |

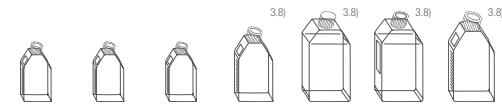

Adapter

| | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | - | - | - | - | - | - | - |
| vessels per rotor | 8 | 8 | 4 | 8 | 4 | 4 | 4 |
| Cat. No. | 4849 | 4849 | 4852 | 4851 | 4831 | 4831 | 4831 |



1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

3.8) When using these tubes, bucket 4880 cannot be closed with lid 4883.

3.9) When using these tubes, bucket 4890 cannot be closed with lid 4883.

4) Please remove the spacer.

5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.

14) With the E3906 add-on kit and the 4783 lid, the 4885/4895 carrier can be converted at a later time to a 4780 carrier with single-hand clamp lock.

21) Adapter must be loaded as illustrated.

24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

27) RCF values indicated refer only to rotor performance. The max. RCF for the accommodated cell culture flasks is 2,300.

28) We recommend the use of the refrigerated ROTANTA 460 R, 460 RC, or 460 RF to ensure that the temperature of the blood is maintained during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 5699-R


Rotor

| | |
|-----------------------------------|---------------------------------|
| max. RPM max. RCF ²⁾ | 4,600 min ⁻¹ 5,063 |
| max. capacity | 4 x 750 ml |
| run-up run-down, braked in sec | 90 95 |
| angle | 90° |
| temperature in °C ¹⁾ | +7 |
| Cat. No. | 5699-R |



Bucket with clamp lock

| | |
|---------------------------|------|
| lid bioseal ⁵⁾ | 4883 |
| Cat. No. | 4890 |




Bucket without clamp lock¹⁴⁾

| | |
|----------|------|
| Cat. No. | 4895 |
|----------|------|




Vessels

| | | | | | | | | | | | | | | | |
|------------------------|------------------|---------------|---------|---------------------|---------|----------|----------|----------|----------|----------|----------------------------------|---------|---------|---------|---------|
| capacity in ml | 1.5 | 2.0 | 5 | 7 | 8 | 9 | 15 | 25 | 50 | 100 | 2.6–2.9 | 2.7–3 | 4–5.5 | 4.5–5 | 4.9 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 12 x 75 | 12 x 100 | 16 x 81 | 14 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 44 x 100 | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 13 x 90 |
| max. RCF ²⁾ | 3,407 / 4,542 | 3,407 / 4,542 | 4,471 | 4,471 | 4,637 | 4,637 | 4,637 | 4,353 | 4,424 | 4,400 | 4,471 | 4,471 | 4,637 | 4,471 | 4,471 |
| radius in mm | 144 / 192 | 144 / 192 | 189 | 189 | 196 | 196 | 196 | 184 | 187 | 186 | 189 | 189 | 196 | 189 | 189 |
| Cat. No. | microliter tubes | | | tubes ²⁾ | | | | | | | blood collection / urine vessels | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-----------|-----------|---------|---------|-----------|-----------|-----------|---------|---------|---------|-----------|---------|-----------|---------|-----------|
| boring Ø x L in mm | 11.5 x 38 | 11.5 x 38 | 13 x 58 | 13 x 58 | 17.5 x 53 | 17.5 x 53 | 17.5 x 53 | 26 x 72 | 36 x 79 | 45 x 78 | 13.5 x 58 | 13 x 58 | 17.5 x 53 | 13 x 58 | 13.5 x 58 |
| vessels per rotor | 168 | 168 | 120 | 120 | 76 | 76 | 76 | 28 | 16 | 8 | 84 | 120 | 76 | 120 | 84 |
| Cat. No. | 4432 | 4432 | 4433 | 4433 | 4434 | 4434 | 4434 | 4438 | 4439 | 4442 | 4435 | 4433 | 4434 | 4433 | 4435 |

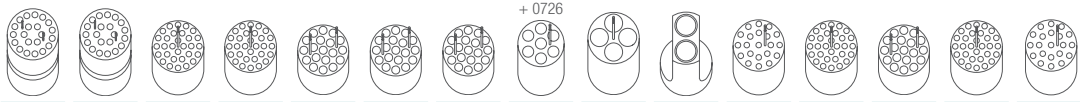

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|----------------------------------|---------|----------|---------|----------|---------|---------|----------|---------|----------|----------------------|---------|----------|----------|----------|
| capacity in ml | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8 | 8.5–10 | 10 | 15 | 50 | 25 | 30 | 50 | 50 |
| Ø x L in mm | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 81 | 16 x 100 | 16 x 80 | 17 x 120 | 29 x 115 | 25 x 90 | 25 x 110 | 29 x 115 | 29 x 107 |
| max. RCF ²⁾ | 4,637 | 4,637 | 4,637 | 4,471 | 4,471 | 4,637 | 4,637 | 4,637 | 4,637 | 4,755 | 4,613 | 4,566 | 4,566 | 4,613 | 4,613 |
| radius in mm | 196 | 196 | 196 | 189 | 189 | 196 | 196 | 196 | 196 | 201 | 195 | 193 | 193 | 195 | 195 |
| Cat. No. | blood collection / urine vessels | | | | | | | | | | tubes with screw cap | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------|---------|---------|---------|--------------------|---------|
| boring Ø x L in mm | 17.5 x 60 | 17.5 x 60 | 17.5 x 60 | 13.5 x 58 | 13.5 x 58 | 17.5 x 60 | 17.5 x 60 | 17.5 x 60 | 17.5 x 60 | 17 x 102 | 31 x 96 | 26 x 72 | 26 x 72 | 31 x 96 | 31 x 96 |
| vessels per rotor | 76 | 76 | 76 | 84 | 84 | 76 | 76 | 76 | 76 | 56 | 28 | 28 | 28 | 28 | 28 |
| Cat. No. | 4434 | 4434 | 4434 | 4435 | 4435 | 4434 | 4434 | 4434 | 4434 | 4469 | 4468 | 4438 | 4438 | 4468 ⁴⁾ | 4468 |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---------------------|------------------|---------------------|---------------------|----------|----------|----------|----------|----------|----------|----------|----------|-------------------------------|--|--|
| capacity in ml | 250 | 290 | 600 | 750 | 175 | 175 | 200 | 225 | 250 | 500 | 450 | 750 | 450 | | |
| Ø x L in mm | 61 x 122 | 62 x 137 | 93 x 134 | 97 x 152 | 61 x 118 | 62 x 144 | 60 x 130 | 61 x 137 | 60 x 172 | 96 x 147 | 97 x 110 | 96 x 135 | 3-place-system without filter | | |
| max. RCF ²⁾ | 4,873 | 4,873 | 4,873 | 4,873 | 5,063 | 5,063 | 5,063 | 5,063 | 5,063 | 5,063 | 5,063 | 5,063 | 5,063 | | |
| radius in mm | 206 | 206 | 206 | 206 | 214 | 214 | 214 | 214 | 214 | 214 | 214 | 214 | 214 | | |
| Cat. No. | 5127 ²⁴⁾ | – ²⁴⁾ | 0551 ²⁴⁾ | 0512 ²⁴⁾ | Falcon® | Nalgene® | Nunc® | Falcon® | Corning® | Corning® | 4447 | 4234-A | blood bags ²⁸⁾ | | |




Adapter

| | | | | | | | | | | | | | | | |
|--------------------|---------|---------|------------|------------|----------|----------|----------|----------|----------|------|------------|------------|---|--|--|
| boring Ø x L in mm | 62 x 92 | 62 x 92 | 98.4 x 116 | 98.4 x 116 | 61 x 105 | 61 x 105 | 61 x 105 | 61 x 105 | 61 x 105 | - | 98.4 x 116 | 98.4 x 116 | - | | |
| vessels per rotor | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | | |
| Cat. No. | 4443 | 4443 | 4451 | 4451 | 4440 | 4430 | 4430 | 4440 | 4430 | 4449 | 4451 | 4451 | - | | |





SWING-OUT ROTOR, 4-PLACE | 5699-R

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF ²⁾ | 4,600 min ⁻¹ 4,637 |
| max. capacity | 4 x 450 ml |
| run-up run-down, braked in sec | 90 95 |
| angle temperature in °C ¹⁾ | 90° +10 |
| Cat. No. | 5699-R |



| | |
|-----------------|---------------|
| Bucket | |
| Cat. No. | 5691-A |




| | | |
|------------------------|---|---|
| | holder for systems without filter | holder for systems with and without filter |
| |  |  |
| Blood bags | | |
| capacity in ml | 450 | 450 |
| blood bag | 3-place-System | 4-place-System |
| max. RCF ²⁾ | 4,637 | 4,637 |
| radius in mm | 196 | 196 |
| Cat. No. | 5693 | 5695 |



| | | |
|----------------------|---|---|
| |  |  |
| Insert | | |
| boring Ø x L in mm | - | - |
| blood bags per rotor | 4 | 4 |
| Cat. No. | 5692 | 5692 |


SWING-OUT ROTOR, 4-PLACE | 5699-R

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF ²⁾ | 4,600 min ⁻¹ 4,921 |
| max. capacity | 12 Arrays |
| run-up run-down, braked in sec | 90 95 |
| angle temperature in °C ¹⁾ | 90° +10 |
| Cat. No. | 5699-R |




| | |
|-----------------|-------------|
| Bucket | |
| Cat. No. | 5636 |




| | |
|------------------------|---|
| | TaqMan Array |
| |  |
| Array | |
| capacity in ml | - |
| W x D x H in mm | 152.5x85.5x12 |
| max. RCF ²⁾ | 4,921 |
| radius in mm | 208 |
| Cat. No. | - |



| | |
|--------------------|---|
| |  |
| Adapter | |
| boring Ø x L in mm | - |
| arrays per rotor | 12 |
| Cat. No. | 5648 |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 4-PLACE | 5699-R


| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF ²⁾ | 4,600 min ⁻¹ 4,258 |
| max. capacity | 4 x 250 ml |
| run-up run-down, braked in sec | 90 95 |
| angle temperature in °C ¹⁾ | 90° +10 |
| Cat. No. | 5699-R |







| | |
|-----------------|--------------------------|
| Bucket | |
| Cat. No. | 5628⁹⁾ |




| | |
|-----------------|---------------|
| Adapter | |
| Cat. No. | 5220-A |

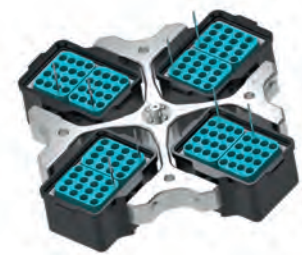


| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 1.5 2.0 3 5 6 7 9 25 50 100 100 250 1.1–1.4 2.6–2.9 2.7–3 |
| Ø x L in mm | 11 x 38 11 x 38 10 x 60 12 x 75 12 x 82 12 x 100 14 x 100 24 x 100 34 x 100 44 x 100 40 x 115 65 x 115 8 x 66 13 x 65 11 x 66 |
| max. RCF ²⁾ | 4,164 4,164 4,069 4,164 4,164 4,164 4,116 4,093 4,093 4,069 4,069 4,045 4,069 4,164 4,116 |
| radius in mm | 176 176 172 176 176 176 174 173 173 172 172 171 172 176 174 |
| Cat. No. | microliter tubes tubes²⁾ blood collection / urine vessels |
| | + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A |
|  | |
| Adapter | |
| boring Ø x L in mm | 11.5 x 50 11.5 x 50 11 x 44 13.5 x 52 13.5 x 52 13.5 x 52 16 x 50 26 x 82.5 36 x 82.5 45.5 x 82 42 x 82 66 x 81 11 x 44 13.5 x 52 12.5 x 39.5 |
| vessels per rotor | 128 128 160 96 96 96 96 40 16 8 8 4 160 96 160 |
| Cat. No.¹⁹⁾ | 5281 5281 5267 5268 5268 5268 5264 5242 5243 5262 5249 5263-A 5267 5268 5227 |

| | |
|--|---|
|  | |
| Vessels | |
| capacity in ml | 4–5.5 4.5–5 4.9 7.5–8.2 9–10 1.6–5 4–7 4–7 8.5–10 15 30 50 50 250 |
| Ø x L in mm | 15 x 75 11 x 92 13 x 90 15 x 92 16 x 92 13 x 75 16 x 75 13 x 100 16 x 100 17 x 120 25 x 110 29 x 115 29 x 115 65 x 115 |
| max. RCF ²⁾ | 4,116 4,116 4,164 4,116 4,093 4,164 4,116 4,164 4,093 4,258 4,187 4,258 4,187 4,045 |
| radius in mm | 174 174 176 174 173 176 174 176 173 180 177 180 177 171 |
| Cat. No. | blood collection / urine vessels tubes with screw cap 5127²⁴⁾ |
| | + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 5220-A + 6319 |
|  | |
| Adapter | |
| boring Ø x L in mm | 16 x 50 12.5 x 42 13.5 x 52 16 x 50 17.6 x 82.5 13.5 x 52 16 x 50 13.5 x 52 17.7 x 86 17 x 90 26 x 82.5 30 x 85 30 x 82 66 x 81 |
| vessels per rotor | 96 160 96 96 88 96 96 96 88 56 40 24 24 4 |
| Cat. No.¹⁹⁾ | 5264 5227 5268 5264 5258 5268 5264 5268 5258 6337-B 5266⁴⁾ 6338-B 6339-A 5263-A⁴⁾ |

| | |
|---|----------------------|
|  | |
| Vessels | |
| capacity in ml | 1–8 |
| Ø x L in mm | simple / multiple |
| max. RCF ²⁾ | 2,744 / 4,069 |
| radius in mm | 116 / 172 |
| Cat. No. | cyto chambers |



| | |
|---|-------------|
|  | |
| Adapter | |
| boring Ø x L in mm | - |
| vessels per rotor | 16 |
| Cat. No.¹⁹⁾ | 5280 |

CYTO

Cyto system available for this model.
More information on [page 180](#)

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Please remove the spacer.
- Max. permissible loading weight of carrier 5628: 800 g. The loading weight is the sum of the weight of the respective adapters, frames, the tubes and their contents.
- Two adapters can be placed on each bucket.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

— SWING-OUT ROTOR, 4-PLACE | 5699-R



Rotor

| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,600 min ⁻¹ 3,785 |
| max. capacity | 4x200 ml |
| run-up run-down, braked in sec | 90 95 |
| angle temperature in °C ¹⁾ | 90° +10 |
| Cat. No. | 5699-R |



Bucket

| | |
|----------|--------|
| Cat. No. | 5630-B |
|----------|--------|



Vessels

| | | | | | |
|------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| capacity in ml | 40 | 160 | 250/260 | 250/260 | 250/260 |
| Ø x L in mm | - | - | - | - | - |
| max. RCF ²⁾ | 3,785 ²⁾ | 3,785 ²⁾ | 3,785 ²⁾ | 3,785 ²⁾ | 3,785 ²⁾ |
| radius in mm | 180 | 160 | 160 | 160 | 160 |
| Cat. No. | Nunc® | Nunc® | Falcon® | Greiner® | Nunc® |



Adapter

| | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | - | - | - | - | - |
| vessels per rotor | 4 | 4 | 4 | 4 | 4 |
| Cat. No. | 5672 | 5673 | 5671 | 5671 | 5671 |



Accommodated cell culture flask:

40 ml

Nunc®, No. 156340 or 156367

160 ml

Nunc®, No. 156472 or 156499
Sarstedt®, No. 83.3911.xxx

200ml

Becton Dickinson®, No. 353024
Greiner®, No. 658170
Nunc®, No. 153732 or 147589

— SWING-OUT ROTOR, 4-PLACE | 5699-R



Rotor

| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,600 min ⁻¹ 3,832 |
| max. capacity | 24 plates |
| run-up run-down, braked in sec | 79 88 |
| angle temperature in °C ¹⁾ | 90° +10 |
| Cat. No. | 5699-R |



Bucket

| | |
|----------|--------|
| Cat. No. | 5630-B |
|----------|--------|




Plates

| | | | | | | | | | |
|------------------------|-----------|-------------|-----------|-------------|-----------|-----------|-----------|-----------|------------|
| W x D x H in mm | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 128x86x46 | 128x86x83 | 84x59x11 | 124x82x20 | - |
| capacity in ml | - | - | - | - | - | - | - | - | 0.2 |
| max. RCF ²⁾ | 3,832 | 3,832 | 3,832 | 3,832 | 3,832 | 3,832 | 3,832 | 3,832 | 3,832 |
| radius in mm | max. 162 | max. 162 | max. 162 | max. 162 | max. 162 | max. 162 | max. 162 | max. 162 | max. 162 |
| Cat. No. | MTP | MTP | CP | DWP | MS | QP | Microtest | PCR plate | PCR strips |



Removal frame


[illegible]

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

27) RCF values indicated refer only to rotor performance. The max. RCF for the accommodated cell culture flasks is 2,300.

SWING-OUT ROTOR, 4-PLACE | 5699-R

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 4,600 min ⁻¹ 4,211 |
| max. capacity | 24 plates |
| run-up run-down, braked in sec | 79 88 |
| angle temperature in °C ¹⁾ | 90° +10 |
| Cat. No. | 5699-R |




| | |
|--|---------------------------|
|  | |
| Bucket | |
| lid bioseal ⁵⁾ | 5629 |
| Cat. No. | 5628 ⁹⁾ |



| | | | | | | | | | |
|---------------------------|-------------|-------------|-------------|-------------|-------------|-------------|------------------------|--------------------|--------------------|
| Plates | | | | | | | | | |
| | | | | | | | | | |
| W x D x H in mm | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 128x86x46 | 128x86x83 | 84x59x11 | 124x82x20 | - |
| capacity in ml | - | - | - | - | - | - | - | - | 0.2 |
| max. RCF ²⁾ | 4,211 | 4,211 | 4,211 | 4,211 | 4,211 | 4,211 | 4,211 | 4,211 | 4,211 |
| radius in mm | max. 178 | max. 178 | max. 178 | max. 178 | max. 178 | max. 178 | max. 178 | max. 178 | max. 178 |
| Cat. No. | MTP | MTP | CP | DWP | MS | QP | Microtest plate | PCR plate | PCR strips |
| Removal frame | | | | | | | | | |
| | | | | | | | | | |
| boring Ø x L in mm | - | - | - | - | - | - | - | - | - |
| plates / strips per rotor | 24 | 20 | 16 | 4 | 4 | 4 | 8 | 4 | 48 x 8 |
| Cat. No. | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 + 1485 | 4626 + 1485 |

SWING-OUT ROTOR, 4-PLACE | 5654

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 3,800 min ⁻¹ 2,890 |
| max. capacity | 24 plates |
| run-up run-down, braked in sec | 62 58 |
| angle max. noise level | 90° 57 dB (A) |
| temperature in °C ¹⁾ | -4 |
| Cat. No. | 5654 |



| | |
|--|-------------|
|  | |
| Bucket | |
| lid bioseal ⁵⁾ | 5629 |
| Cat. No. | 5653 |



| | | | | | | | | | |
|---------------------------|-------------|-------------|-------------|-------------|-------------|-------------|------------------------|--------------------|--------------------|
| Plates | | | | | | | | | |
| | | | | | | | | | |
| W x D x H in mm | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 128x86x46 | 128x86x83 | 84x59x11 | 124x82x20 | - |
| capacity in ml | - | - | - | - | - | - | - | - | 0.2 |
| max. RCF ²⁾ | 2,890 | 2,890 | 2,890 | 2,890 | 2,890 | 2,890 | 2,890 | 2,890 | 2,890 |
| radius in mm | max. 179 | max. 179 | max. 179 | max. 179 | max. 179 | max. 179 | max. 179 | max. 179 | max. 179 |
| Cat. No. | MTP | MTP | CP | DWP | MS | QP | Microtest plate | PCR plate | PCR strips |
| Removal frame | | | | | | | | | |
| | | | | | | | | | |
| boring Ø x L in mm | - | - | - | - | - | - | - | - | - |
| plates / strips per rotor | 24 | 20 | 16 | 4 | 4 | 4 | 8 | 4 | 48 x 8 |
| Cat. No. | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 + 1485 | 4626 + 1485 |

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Tested by TÜV in conformity with DIN EN 61010, section 2-020.
- Max. permissible loading weight of carrier 5628: 800 g. The loading weight is the sum of the weight of the respective adapters, frames, the tubes and their contents.

SWING-OUT ROTOR, 4-PLACE | 5654




Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 3,800 min ⁻¹ 3,196 |
| max. capacity | 4 x 1,000 ml |
| run-up run-down, braked in sec | 62 58 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C ¹⁾ | +3 |
| Cat. No. | 5654 |

Bucket

| | |
|---------------------------|---------------|
| lid bioseal ⁵⁾ | 5652 |
| Cat. No. | 5651-A |



Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------|---------|---------|---------|---------|----------|----------|----------|----------|---|---------|---------|---------|---------|---------|
| capacity in ml | 3 | 4 | 4 | 5 | 6 | 7 | 10 | 10 | 15 | 1.1–1.4 | 2.6–3.4 | 2.7–3 | 4.5–5 | 4–5.5 | 4.9 |
| Ø x L in mm | 10 x 60 | 10 x 88 | 12 x 60 | 12 x 75 | 12 x 82 | 12 x 100 | 13 x 100 | 13 x 100 | 17 x 100 | 8 x 66 | 13 x 65 | 11 x 66 | 11 x 92 | 15 x 75 | 13 x 90 |
| max. RCF ²⁾ | 2,874 | 2,874 | 2,874 | 2,874 | 2,874 | 2,874 | 2,906 | 2,906 | 2,970 | 2,874 | 2,906 | 2,874 | 2,874 | 2,970 | 2,906 |
| radius in mm | 178 | 178 | 178 | 178 | 178 | 178 | 180 | 180 | 184 | 178 | 180 | 178 | 178 | 184 | 180 |
| Cat. No. | tubes²⁾ | | | | | | | | | blood collection / urine vessels | | | | | |

Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.5 x 40 | 12.5 x 40 | 12.5 x 40 | 12.5 x 40 | 12.5 x 40 | 12.5 x 40 | 13.2 x 42.4 | 13.2 x 42.4 | 17.2 x 46.5 | 12.5 x 40 | 13.2 x 42.4 | 12.5 x 40 | 12.5 x 40 | 17.2 x 46.5 | 13.2 x 42.4 |
| vessels per rotor | 292 | 292 | 292 | 292 | 292 | 292 | 196 | 188 | 148 | 292 | 196 | 292 | 292 | 148 | 196 |
| Cat. No. | 5684 | 5684 | 5684 | 5684 | 5684 | 5684 | 5674 | 5685 | 5682 | 5684 | 5674 | 5684 | 5684 | 5682 | 5674 |

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---|---------|----------|---------|---------|----------|----------|----------|---------|-----------------------------|----------------|-----------------|--------------|----------------|----------------|
| capacity in ml | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 4–7 | 8.5–10 | 10 | 15 | 50 | 175 | 175 | 200 | 225 |
| Ø x L in mm | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 16 x 75 | 13 x 100 | 13 x 100 | 16 x 100 | 16 x 80 | 17 x 120 | 29 x 115 | 61 x 118 | 62 x 144 | 60 x 130 | 61 x 137 |
| max. RCF ²⁾ | 2,970 | 2,970 | 2,970 | 2,906 | 2,970 | 2,906 | 2,906 | 2,970 | 2,970 | 3,196 | 3,196 | 3,196 | 3,196 | 3,196 | 3,196 |
| radius in mm | 184 | 184 | 184 | 180 | 184 | 180 | 180 | 184 | 184 | 198 | 198 | 198 | 198 | 198 | 198 |
| Cat. No. | blood collection / urine vessels | | | | | | | | | tubes with screw cap | Falcon® | Nalgene® | Nunc® | Falcon® | Falcon® |

Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17.2 x 46.5 | 17.2 x 46.5 | 17.2 x 46.5 | 13.2 x 42.4 | 17.2 x 46.5 | 13.2 x 42.4 | 13.2 x 42.4 | 17.2 x 46.5 | 17.2 x 46.5 | 17 x 60 | 30 x 60 | 62 x 100 | 62 x 100 | 62 x 100 | 62 x 100 |
| vessels per rotor | 148 | 148 | 148 | 196 | 148 | 196 | 188 | 148 | 148 | 96 | 40 | 8 | 8 | 8 | 8 |
| Cat. No. | 5682 | 5682 | 5682 | 5674 | 5682 | 5674 | 5685 | 5682 | 5682 | 5683 | 5686 | 5681 | 5681 | 5681 | 5681 |

Vessels

| | | | | | | | |
|------------------------|---------------------------|------------------------|-------------|----------------|---------------------------|---------------------------|--------------|
| capacity in ml | 250 | 290 | 450 | 500 | 600 | 750 | 1,000 |
| Ø x L in mm | 62 x 122 | 62 x 137 | 97 x 110 | 96 x 147 | 93 x 134 | 97 x 152 | 99/126 x 140 |
| max. RCF ²⁾ | 3,196 | 3,196 | 3,196 | 3,196 | 3,196 | 3,196 | 3,196 |
| radius in mm | 198 | 198 | 198 | 198 | 198 | 198 | 198 |
| Cat. No. | 5127²⁴⁾ | -²⁴⁾ | 4447 | Coming® | 0551²⁴⁾ | 0512²⁴⁾ | - |

Adapter

| | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|
| boring Ø x L in mm | 62 x 100 | 62 x 100 | 98 x 100 | 98 x 100 | 98 x 100 | 98 x 100 | 100/127 x 68 |
| vessels per rotor | 8 | 8 | 4 | 4 | 4 | 4 | 4 |
| Cat. No. | 5681 | 5681 | 5687 | 5687 | 5687 | 5687 | 5669 |

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 10) When using this tubes, bucket 5651-A cannot be closed with lid 5652.
- Tested by TÜV in conformity with DIN EN 61010, section 2-020.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 6-PLACE | 4446




Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 3,631 |
| max. capacity | 6 x 100 ml |
| run-up run-down, braked in sec | 45 55 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C ¹⁾ | -3 |
| Cat. No. | 4446 |

Bucket

| | |
|-----------------|-------------|
| lid | 5053 |
| Cat. No. | 5051 |



Vessels

| | | | | | | | | | | | | | | |
|------------------------|-------------------------|---------------|---------|---------|----------------------------|---------|---------|----------|----------|----------|----------|----------|----------|----------|
| capacity in ml | 1.5 | 2 | 1.5 | 2 | 3 | 5 | 6 | 7 | 9 | 15 | 25 | 50 | 100 | 100 |
| Ø x L in mm | 11 x 38 | 11 x 38 | 11 x 38 | 11 x 38 | 10 x 60 | 12 x 75 | 12 x 82 | 12 x 100 | 14 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 44 x 100 | 40 x 115 |
| max. RCF ²⁾ | 2,486 / 3,363 | 2,486 / 3,363 | 3,363 | 3,363 | 3,274 | 3,309 | 3,309 | 3,291 | 3,309 | 3,291 | 3,291 | 3,291 | 3,291 | 3,291 |
| radius in mm | 139 / 188 | 139 / 188 | 188 | 188 | 183 | 185 | 185 | 184 | 185 | 184 | 184 | 184 | 184 | 184 |
| Cat. No. | microliter tubes | | | | tubes ²⁾ | | | | | | | | | |



Adapter

| | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|----------------------------|-------------|----------------------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.5 x 37 | 12.5 x 37 | 11.5 x 50 | 11.5 x 50 | 11 x 44 | 12.5 x 37 | 12.5 x 37 | 12.5 x 82.5 | 16 x 50 | 17.5 x 86 | 26 x 86 | 36 x 86 | 45.5 x 86 | 42 x 86 |
| vessels per rotor | 240 | 240 | 96 | 96 | 120 | 120 | 120 | 120 | 72 | 72 | 30 | 12 | 6 | 6 |
| Cat. No. | 5257 | 5257 | 5281 | 5281 | 5267 | 5227 | 5227 | 5247 ¹⁵⁾ | 5264 | 5248 ¹⁵⁾ | 5242 | 5243 | 5262 | 5249 |

Vessels

| | | | | | | | | | | | | | |
|------------------------|---|---------|---------|---------|---------|---------|---------|---------|----------|---------|----------|---------|----------|
| capacity in ml | 1.1–1.4 | 2.6–2.9 | 2.7–3 | 4–5.5 | 4.5–5 | 4.9 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8.5–10 |
| Ø x L in mm | 8 x 66 | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 13 x 90 | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 100 |
| max. RCF ²⁾ | 3,274 | 3,345 | 3,309 | 3,309 | 3,309 | 3,345 | 3,309 | 3,291 | 3,291 | 3,345 | 3,345 | 3,309 | 3,291 |
| radius in mm | 183 | 187 | 185 | 185 | 185 | 187 | 185 | 184 | 184 | 187 | 187 | 185 | 184 |
| Cat. No. | blood collection / urine vessels | | | | | | | | | | | | |



Adapter

| | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 11 x 44 | 13.5 x 52 | 12.5 x 42 | 16 x 50 | 12.5 x 42 | 13.5 x 52 | 16 x 50 | 17.6 x 86 | 17.6 x 86 | 13.5 x 52 | 13.5 x 52 | 16 x 50 | 17.5 x 86 |
| vessels per rotor | 120 | 72 | 120 | 72 | 120 | 72 | 72 | 66 | 66 | 72 | 72 | 72 | 72 |
| Cat. No. | 5267 | 5268 | 5227 | 5264 | 5227 | 5268 | 5264 | 5258 | 5258 | 5268 | 5268 | 5264 | 5248 |

Vessels

| | | | | | |
|------------------------|-----------------------------|----------|----------|----------|----------------------|
| capacity in ml | 15 | 50 | 12 | 50 | 1–8 |
| Ø x L in mm | 17 x 120 | 30 x 115 | 17 x 100 | 29 x 115 | simple / multiple |
| max. RCF ²⁾ | 3,434 | 3,291 | 3,434 | 3,291 | 2,290 / 3,291 |
| radius in mm | 192 | 188 | 192 | 184 | 128 / 184 |
| Cat. No. | tubes with screw cap | | | | cyto chambers |



Adapter

| | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17 x 90 | 30 x 86 | 17 x 90 | 36 x 86 | - |
| vessels per rotor | 42 | 12 | 42 | 12 | 12 |
| Cat. No. | 6306 | 5259 | 6306 | 5243 | 5280 |

CYTO

Cyto system available for this model.
More information on [page 180](#)

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 5051 cannot be closed with lid 5053.
- With Cat. No. 5247-91 or 5248-91 these adapters can also be ordered with a decanting aid.

SWING-OUT ROTOR, 6-PLACE | 4446




Rotor

| | |
|---|--------------------------------|
| max. RPM max. RCF | 4,000 min ¹ 3,631 |
| max. capacity | 6 x 290 ml |
| run-up run-down, braked in sec | 38 46 |
| angle temperature in °C ¹⁾ | 90° -3 |
| Cat. No. | 4446 |



Bucket

| | |
|---------------------------|-------------|
| lid bioseal ⁵⁾ | 5093 |
| Cat. No. | 5092 |

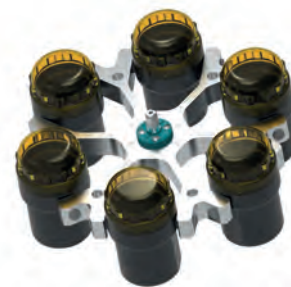

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------|-------|--------|--------|--------|--------|--------|--------|--------|---|---------|---------|---------|-------|-------|
| capacity in ml | 5 | 6 | 7 | 15 | 25 | 50 | 100 | 100 | 250 | 1.1–1.4 | 1.1–1.4 | 2.6–2.9 | 2.6–2.9 | 2.7–3 | 2.7–3 |
| Ø x L in mm | 12x75 | 12x82 | 12x100 | 17x100 | 24x100 | 34x100 | 44x100 | 40x115 | 65x115 | 8 x 66 | 8 x 66 | 13 x 65 | 13 x 65 | 11x66 | 11x66 |
| max. RCF ²⁾ | 3,542 | 3,542 | 3,542 | 3,488 | 3,434 | 3,631 | 3,488 | 3,488 | 3,631 | 3,488 | 3,077 | 3,488 | 3,077 | 3,488 | 3,077 |
| radius in mm | 198 | 198 | 198 | 195 | 192 | 195 | 195 | 195 | 203 | 195 | 172 | 195 | 172 | 195 | 172 |
| Cat. No. | tubes²⁾ | | | | | | | | | blood collection tubes / urine tubes | | | | | |

Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.8x42 | 12.8x42 | 12.8x79.5 | 17.5x56.7 | 25.5x74 | 35.5x77.5 | 45.5x76.5 | 42x76.5 | 66x103 | 13.5x56.7 | 12.8x54.5 | 13.5x56.7 | 12.8x54.5 | 13.5x56.7 | 12.8x54.5 |
| vessels per rotor | 72 | 72 | 72 | 48 | 24 | 6 | 6 | 6 | 6 | 48 | 72 | 48 | 72 | 48 | 72 |
| Cat. No. | 5128 | 5128 | 5120 | 5136 | 5122 | 5124 | 5125 | 5126 | 1791 | 5137 | 5138 | 5137 | 5138 | 5137 | 5138 |

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---|-------|-------|---------|-------|--------|-------|-------|-------|--------|-----------------------------|--------|---------|--------|----------|
| capacity in ml | 4.9 | 4–4.5 | 4.5–5 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 1.6–5 | 4–7 | 4–7 | 8 | 8.5–10 | 10 | 15 | 30 |
| Ø x L in mm | 13x90 | 15x75 | 11x92 | 15x92 | 16x92 | 15x102 | 13x75 | 13x75 | 16x75 | 13x100 | 16x125 | 16x100 | 16 x 80 | 17x120 | 25 x 110 |
| max. RCF ²⁾ | 3,488 | 3,488 | 3,542 | 3,488 | 3,488 | 3,488 | 3,488 | 3,077 | 3,488 | 3,542 | 3,542 | 3,488 | 3,488 | 3,631 | 3,327 |
| radius in mm | 195 | 195 | 198 | 195 | 195 | 195 | 195 | 172 | 195 | 198 | 198 | 195 | 195 | 203 | 192 |
| Cat. No. | blood collection tubes / urine tubes | | | | | | | | | | tubes with screw cap | | | | |

Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 13.5x56.7 | 17.5x56.7 | 12.8x79.5 | 17.5x56.7 | 17.5x56.7 | 17.5x56.7 | 13.5x56.7 | 12.8x54.5 | 17.5x56.7 | 12.8x79.5 | 17.5x79.5 | 17.5x56.7 | 17.5x56.7 | 17 x 85 | 25.5 x 74 |
| vessels per rotor | 48 | 48 | 72 | 48 | 48 | 48 | 48 | 72 | 48 | 72 | 42 | 48 | 48 | 42 | 24 |
| Cat. No. | 5137 | 5136 | 5120 | 5136 | 5136 | 5136 | 5137 | 5138 | 5136 | 5120 | 5121 | 5136 | 5136 | 5129 | 5122 |

Vessels


| | | | | | | | |
|------------------------|-----------------------------|--------|--------|-------|--------|---------------------------|------------------------|
| capacity in ml | 50 | 50 | 12 | 25 | 30 | 250 | 290 |
| Ø x L in mm | 30x115 | 29x115 | 17x100 | 25x90 | 25x110 | 62 x 122 | 62 x 137 |
| max. RCF ²⁾ | 3,631 | 3,560 | 3,542 | 3,363 | 3,327 | 3,631 | 3,631 |
| radius in mm | 203 | 199 | 198 | 188 | 192 | 203 | 203 |
| Cat. No. | tubes with screw cap | | | | | 5127²⁴⁾ | -²⁴⁾ |

Adapter

| | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 30x85 | 30x99 | 17.5x79.5 | 26x73 | 25.5x74 | 62x90 | 62x90 |
| vessels per rotor | 12 | 12 | 42 | 18 | 24 | 6 | 6 |
| Cat. No. | 5123 | 5135 | 5121 | 5134 | 5122 | 6319 | 6319 |

- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, bucket 5092 cannot be closed with lid 5053.
- Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.



















SWING-OUT ROTOR, 2-PLACE | 5622

| | | |
|---|---------------------|---|
| Rotor | |  |
| max. RPM | ROTANTA 460 460 R | 5,900 min ⁻¹ 6,200 min ⁻¹ |
| max. RCF | | 5,838 6,446 |
| max. capacity | | 12 plates |
| run-up run-down, braked in sec | | 50 52 32 39 |
| angle temperature in °C ¹⁾ | | 90° +10 |
| Cat. No. | | 5622 |




| | | |
|---------------------------|--|--|
| Bucket | |  |
| lid bioseal ⁵⁾ | | 4627 |
| Cat. No. | | 5631 |



| | | | | | | | | | | |
|------------------------|---------------------|---|---|---|---|---|---|---|---|---|
| Plates | |  |  |  |  |  |  |  |  |  |
| W x D x H in mm | | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 128x86x46 | 128x86x83 | 84x59x11 | 124x82x20 | - |
| capacity in ml | | - | - | - | - | - | - | - | - | 0.2 |
| max. RCF ²⁾ | ROTANTA 460 460 R | 5,838 6,446 | 5,838 6,446 | 5,838 6,446 | 5,838 6,446 | 5,838 6,446 | 5,838 6,446 | 5,838 6,446 | 5,838 6,446 | 5,838 6,446 |
| radius in mm | | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Cat. No. | | MTP | MTP | CP | DWP | MS | QP | Microtest plate | PCR plate 96 wells | PCR strips |
| Removal frame | |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | | - | - | - | - | - | - | - | - | - |
| vessels per rotor | | 12 | 10 | 8 | 2 | 2 | 2 | 4 | 2 | 24 |
| Cat. No. | | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 | 4626 + 1485 | 4626 + 1485 |









SWING-OUT ROTOR, 4-PLACE | 4474

| | | |
|----------------------------------|--|---|
| Rotor | |  |
| max. RPM max. RCF | | 2,000 min ⁻¹ 984 |
| max. capacity | | 4x100 ml |
| run-up run-down, braked in sec | | 14 17 |
| angle max. noise level | | 90° 46 dB (A) |
| temperature in °C ¹⁾ | | -8 |
| Cat. No. | | 4474 |




| | | |
|-----------------|--|--|
| Bucket | |  |
| Cat. No. | | 4275 |



| | | | | | |
|------------------------|--|---|---|---|---|
| Vessels | |  |  |  |  |
| capacity in ml | | 100 | 100 | 100 | 50 |
| Ø x L in mm | | 58x161 | 44x168 | 37x200 | 36.5x185 |
| max. RCF ²⁾ | | 984 | 961 | 961 | 912 |
| radius in mm | | 220 | 215 | 215 | 204 |
| Cat. No. | | ASTM 0528 ^{2.1)} | ASTM ^{2.1)} | ASTM 0531 ^{2.1)} | Babcock |
| Adapter | |  |  |  |  |
| boring Ø x L in mm | | - | - | - | - |
| vessels per rotor | | 4 | 4 | 4 | 4 |
| Cat. No. | | 0771 | 4277 | 4276-B | 0703-A |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2.1) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of vessels used should be verified with the individual manufacturers. The max. RCF for ASTM Tubes annotated with footnote 2) is 700.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.

ANGLE ROTOR, 30-PLACE | 4489-A








| | |
|---|---|
| Rotor |  |
| max. RPM max. RCF | 15,000 min ⁻¹ 24,400 |
| max. capacity | 30 x 2 ml |
| run-up run-down, braked in sec | 65 63 |
| angle temperature in °C ¹⁾ | 45° +4 |
| Cat. No. | 4489-A |

+ Lid bioseal[®]
and phenol-resistant
Cat. No.









INCLUSIVE




| | | | | | | | |
|------------------------|---|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2 | 0.5 |
| Ø x L in mm | 6x18 | 6x45 | 8x30 | 8x45 | 11x38 | 11x38 | 10.7x46 |
| max. RCF ²⁾ | 24,400 | 24,400 | 24,400 | 24,400 | 24,400 | 24,400 | 23,394 |
| radius in mm | 97 | 97 | 97 | 97 | 97 | 97 | 93 |
| Cat. No. | microliter tubes | | | | | | Pediatric |



| | | | | | | | |
|--------------------|---|---|---|---|---|---|---|
| Adapter |  |  |  |  |  |  |  |
| boring Ø x L in mm | 6x40 | 6x40 | 8x40 | 8x40 | 10.2x19.3 | 11.2x40.1 | 11.2x40.1 |
| vessels per rotor | 30 | 30 | 30 | 30 | 30 | 30 | 15 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 0788 |

ANGLE ROTOR, 6-PLACE | 5645












| | |
|---|---|
| Rotor |  |
| max. RPM ROTANTA 460 460 R | 8,500 min ⁻¹ 9,500 min ⁻¹ |
| max. RCF | 11,228 14,025 |
| max. capacity | 6 x 250 ml |
| run-up run-down, braked in sec | 98 115 105 120 |
| angle temperature in °C ¹⁾ | 25° +7 |
| Cat. No. | 5645 |

+ Lid bioseal[®]
Cat. No.







INCLUSIVE




| | | | | | | | | | | | |
|--|---|---|---|---|---|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |  |  |  |  |
| capacity in ml | 15 | 25 | 94 | 15 | 50 | 10 | 30 | 50 | 85 | 94 | 250 |
| Ø x L in mm | 17x100 | 24x100 | 38x110 | 17x120 | 29x115 | 16x80 | 26x95 | 29x107 | 38 x 106 | 38 x 110 | 61.5x122 |
| max. RCF ²⁾ ROTANTA 460 | 10,662 | 10,339 | 9,855 | 10,824 | 9,693 | 10,743 | 10,339 | 9,693 | 9,855 | 9,855 | 11,228 |
| max. RCF ²⁾ ROTANTA 460 R | 13,319 | 12,915 | 12,310 | 13,521 | 12,108 | 13,420 | 12,915 | 12,108 | 12,310 | 12,310 | 14,025 |
| radius in mm | 132 | 128 | 122 | 134 | 118 | 133 | 128 | 120 | 122 | 122 | 139 |
| Cat. No. | tubes²⁾ | | | tubes with screw cap | | | | | | | 5127²⁴⁾ |



| | | | | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---|---|---|---|
| Adapter |  |  |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | 17.6 x 83 | 26x80 | 38.6x88 | 17x106 | 30x100 | 16.6x70 | 26x80 | 29x90 | 38.6 x 88 | 38.6 x 88 | 61.5x109 |
| vessels per rotor | 42 | 18 | 6 | 30 | 6 | 48 | 18 | 6 | 6 | 6 | 6 |
| Cat. No. | 5646 | 5642 | 5644 | 5637 | 5638 | 5641 | 5642 | 5643 | 5644 | 5644 | - |


ANGLE ROTOR, 6-PLACE | 5615



Rotor


| | |
|---|-----------------------------------|
| max. RPM max. RCF | 11,500 min ⁻¹ 18,038 |
| max. capacity | 6 x 94 ml |
| run-up run-down, braked in sec | 58 64 |
| angle temperature in °C ¹⁾ | 45° +6 |
| Cat. No. | 5615 |































+











Lid bioseal ⁵⁾

| | |
|-----------------|------------------|
| Cat. No. | INCLUSIVE |
|-----------------|------------------|



| Vessels |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| capacity in ml | 0.5 | 1.5 | 2.0 | 3 | 15 | 25 | 50 | 94 | 7.5 – 8.2 | 9 – 10 | 10 | 8.5 – 10 | 5 | 15 | 50 |
| Ø x L in mm | 10.7x46 | 11x38 | 11x38 | 10x60 | 17x100 | 24x100 | 34x100 | 38x110 | 15x92 | 16x92 | 15x102 | 16x100 | 17x51 | 17x120 | 29x115 |
| max. RCF ²⁾ | 17,299 | 17,299 | 17,299 | 17,299 | 17,003 | 16,560 | 17,743 | 18,038 | 17,003 | 17,003 | 17,003 | 17,003 | 16,856 | 17,299 | 17,595 |
| radius in mm | 117 | 117 | 117 | 117 | 115 | 112 | 120 | 122 | 115 | 115 | 115 | 115 | 114 | 117 | 119 |
| Cat. No. | Pediatric | microliter tubes | | | tubes ²⁾ | | | | blood collection / urine tubes | | | | - | tubes with screw cap | |
| Adapter |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | 11.4x39 | 11.4x39 | 11.4x39 | 11.4x39 | 17.5x92 | 26x85 | 35x89 | 38.2x89.6 | 17.5x92 | 17.5x92 | 17.5x92 | 17.5x92 | 17x51 | 17x106 | 29.8x97 |
| vessels per rotor | 24 | 24 | 24 | 24 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |
| Cat. No. | 1449 | 1449 | 1449 | 1449 | 1451 | 1447 | 1463 | - | 1451 | 1451 | 1451 | 1451 | 1476 | 1466 | 1454 |

| Vessels |  |  |  |  |
|------------------------|---|---|---|---|
| capacity in ml | 10 | 30 | 50 | 85 |
| Ø x L in mm | 16x80 | 26x95 | 29x107 | 38 x 106 |
| max. RCF ²⁾ | 17,003 | 16,560 | 17,299 | 18,038 |
| radius in mm | 115 | 112 | 117 | 122 |
| Cat. No. | tubes with screw cap | | | |
| Adapter |  |  |  |  |
| boring Ø x L in mm | 16.5x74 | 26x85 | 29x92 | 38.2x89.6 |
| vessels per rotor | 12 | 6 | 6 | 6 |
| Cat. No. | 1448 | 1447 | 1446 | - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- 7) For centrifugation at high speeds, we recommend to use form-fitting, phenol-resistant adapters. Cat. No. 2031.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

PACKAGES ROTANTA 460 | 460 R

ROTANTA 460 CONICAL PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTANTA 460 centrifuge | 5650 | 96 | 15 | 17 x 120 | 3,800 | 3,196 |
| - 1 x swing-out rotor, 4-place | 5654 | 40 | 50 | 29 x 115 | 3,800 | 3,196 |
| - 4 x bucket | 5651-A | | | | | |
| - 4 x adapter, 24-place (conical) | 5683 | | | | | |
| - 4 x adapter, 10-place (conical) | 5686 | | | | | |

5650SET1

ROTANTA 460 CONICAL PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTANTA 460 centrifuge | 5650 | 56 | 15 | 17 x 120 | 4,600 | 4,637 |
| - 1 x swing-out rotor, 4-place | 5699-R | 28 | 50 | 30 x 115 | 4,600 | 4,708 |
| - 4 x bucket | 4885 | | | | | |
| - 4 x adapter, 14-place (conical) | 4839 | | | | | |
| - 4 x adapter, 7-place (conical) | 5647 | | | | | |

5650SET2

ROTANTA 460 R CONICAL PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTANTA 460 R centrifuge | 5660 | 56 | 15 | 17 x 120 | 4,600 | 4,755 |
| - 1 x swing-out rotor, 4-place | 5699-R | 28 | 50 | 29 x 115 | 4,600 | 4,613 |
| - 4 x bucket | 4890 | | | | | |
| - 4 x lid (bioseal) | 4883 | | | | | |
| - 4 x adapter, 7-place (conical) | 4468 | | | | | |
| - 4 x adapter, 14-place (conical) | 4469 | | | | | |

5660SET1

ROTANTA 460 R CONICAL PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTANTA 460 R centrifuge | 5660 | 96 | 15 | 17 x 120 | 3,800 | 3,196 |
| - 1 x swing-out rotor, 4-place | 5654 | 40 | 50 | 30 x 115 | 3,800 | 3,196 |
| - 4 x bucket | 5651-A | | | | | |
| - 4 x adapter, 24-place (conical) | 5683 | | | | | |
| - 4 x adapter, 10-place (conical) | 5686 | | | | | |

5660SET2

ROTANTA 460 R CONICAL PACKAGE 3

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTANTA 460 R centrifuge | 5660 | 56 | 15 | 17 x 120 | 4,600 | 4,637 |
| - 1 x swing-out rotor, 4-place | 5699-R | 28 | 50 | 30 x 115 | 4,600 | 4,708 |
| - 4 x bucket | 4885 | | | | | |
| - 4 x adapter, 14-place (conical) | 4839 | | | | | |
| - 4 x adapter, 7-place (conical) | 5647 | | | | | |

5660SET3

ROTANTA 460 R BLOOD TUBES PACKAGE 4

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--------------------------------|--------|-------------------|-------------|-------------|-------|-------|
| - 1 x ROTANTA 460 R centrifuge | 5660 | 196 | 4-7 | 13 x 90/100 | 3,800 | 2,906 |
| - 1 x swing-out rotor, 4-place | 5654 | 148 | 4-15 | 17 x 100 | 3,800 | 2,970 |
| - 4 x bucket | 5651-A | | | | | |
| - 4 x lid (bioseal) | 5652 | | | | | |
| - 4 x adapter, 47-place | 5685 | | | | | |
| - 4 x adapter, 37-place | 5682 | | | | | |

5660SET4

ROTANTA 460 R BLOOD TUBES PACKAGE 5

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|--------------------------------|--------|-------------------|-------------|-------------|-------|-------|
| - 1 x ROTANTA 460 R centrifuge | 5660 | 108 | 1.6 -7 | 13 x 90/100 | 4,600 | 4,684 |
| - 1 x swing-out rotor, 4-place | 5699-R | 88 | 4 - 10 | 16 x 100 | 4,600 | 4,684 |
| - 4 x bucket | 4880 | | | | | |
| - 4 x lid (bioseal) | 4883 | | | | | |
| - 4 x adapter, 27-place | 4847 | | | | | |
| - 4 x adapter, 22-place | 4848 | | | | | |

5660SET5



— PACKAGES ROTANTA 460 RF

ROTANTA 460 RF CONICAL PACKAGE 1

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTANTA 460 RF centrifuge | 5675 | 96 | 15 | 17 x 120 | 3,800 | 3,196 |
| - 1 x swing-out rotor, 4-place | 5654 | 40 | 50 | 29 x 115 | 3,800 | 3,196 |
| - 4 x bucket | 5651-A | | | | | |
| - 4 x adapter, 24-place (conical) | 5683 | | | | | |
| - 4 x adapter, 10-place (conical) | 5686 | | | | | |

5675SET1

ROTANTA 460 RF CONICAL PACKAGE 2

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|-----------------------------------|--------|-------------------|-------------|-----------|-------|-------|
| - 1 x ROTANTA 460 RF centrifuge | 5675 | 56 | 15 | 17 x 120 | 4,600 | 4,637 |
| - 1 x swing-out rotor, 4-place | 5699-R | 28 | 50 | 30 x 115 | 4,600 | 4,708 |
| - 4 x bucket | 4885 | | | | | |
| - 4 x adapter, 14-place (conical) | 4839 | | | | | |
| - 4 x adapter, 7-place (conical) | 5647 | | | | | |

5675SET2

ROTANTA 460 RF BLOOD TUBE PACKAGE 3

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---------------------------------|--------|-------------------|-------------|-------------|-------|-------|
| - 1 x ROTANTA 460 RF centrifuge | 5675 | 188 | 4-10 | 13 x 90/100 | 3,800 | 2,906 |
| - 1 x swing-out rotor, 4-place | 5654 | 148 | 4-15 | 17 x 100 | 3,800 | 2,970 |
| - 4 x bucket | 5651-A | | | | | |
| - 4 x lid (bioseal) | 5652 | | | | | |
| - 4 x adapter, 47-place | 5685 | | | | | |
| - 4 x adapter, 37-place | 5682 | | | | | |

5675SET3

ROTANTA 460 RF BLOOD TUBE PACKAGE 4

| | | number of vessels | volume (ml) | size (mm) | RPM | RCF |
|---------------------------------|--------|-------------------|-------------|-------------|-------|-------|
| - 1 x ROTANTA 460 RF centrifuge | 5675 | 108 | 1.6 -7 | 13 x 90/100 | 4,600 | 4,684 |
| - 1 x swing-out rotor, 4-place | 5699-R | 88 | 4 - 10 | 16 x 100 | 4,600 | 4,684 |
| - 4 x bucket | 4880 | | | | | |
| - 4 x lid (bioseal) | 4883 | | | | | |
| - 4 x adapter, 27-place | 4847 | | | | | |
| - 4 x adapter, 22-place | 4848 | | | | | |

5675SET4



ROTOFIX 46 | 46 H

Robust industrial unit

These are ideal centrifuges for research and industrial laboratories. They are robust and can withstand intensive usage, in the field. Specialty buckets are able to hold ASTM pear-shaped and conical tubes for petroleum testing. Heated option provides chamber temperature up to +90 °C (ROTOFIX 46 H).

— FEATURES

- Max. RPM: 4,000 min⁻¹ | 2,000 min⁻¹ – adjustable in increments of 10
- Max. RCF: 3,095 | 984
- Max. capacity: 4 x 290 ml | 4 x 100 ml
- Robust and versatile benchtop centrifuge
- Choice of 4 rotors
- Maximum noise level of ≤ 58 dB(A)
- Impulse button for short centrifugation
- Easy operation with keypad
- Model 46 H heatable from +10 to +90 °C

— FIELDS OF APPLICATION

- Petrochemical laboratories
- Automobile industry
- Chemical laboratories



More information about the control panel can be found on [page 202](#)





TECHNICAL DATA

| | ROTOFIX 46 non-refrigerated | ROTOFIX 46 H heated |
|--|---|---|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 – 60 Hz |
| consumption | 460 VA | 600 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 4 x 290 ml | 4 x 100 ml |
| max. RPM | 4,000 min ⁻¹ | 2,000 min ⁻¹ |
| max. RCF | 3,095 | 984 |
| running time | 1 – 99 min : 59 sec, ∞ continuous run, short cycle mode (impulse button) | 1 – 99 min : 59 sec, ∞ continuous run, short cycle mode (impulse button) |
| dimesions (WxDxH) | 538x647x345 mm | 538x647x345 mm |
| weight | approx. 60 kg | approx. 60 kg |
| noise level | 58 dB (A) with rotor 4474 | 58 dB (A) with rotor 4474 |
| temperature setting, infinitely variable (dependent on the ambient temperature) | - | from +10 to +90 °C |
| Cat. No. | 4600 | 4600-50 |
| 100 – 127 V 1 ~ / 50 – 60 Hz *) | 4600-01 | 4600-51 |
| consumption | 500 VA | 650 VA |
| emission, immunity | FCC class B | FCC class B |



*) Other voltages on request.

AVAILABLE ROTORS


SWING-OUT ROTORS


| | angle | max. RPM | max. capacity | Cat. No. | page |
|--|-------|-------------------------|---------------|-------------|------|
|  swing-out rotor, 4-place | 90° | 2,000 min ⁻¹ | 4x100 ml | 4474 | 134 |
|  swing-out rotor, 4-place | 90° | 4,000 min ⁻¹ | 4x290 ml | 5694 | 134 |

SWING-OUT ROTOR, 4-PLACE | 4474



| | | | |
|---|-------------------------------|--|------|
|  | |  | |
| Rotor | | Bucket | |
| max. RPM max. RCF | 2,000 min ⁻¹ 984 | Cat. No. | 4275 |
| max. capacity | 4 x 100 ml | | |
| run-up run-down, braked in sec | 16 40 | | |
| angle max. noise level | 90° 58 dB (A) | | |
| Cat. No. | 4474 | | |






| | |
|---|---|
|  | |
| Tubes | |
| capacity in ml | 50 100 100 100 50 |
| Ø x L in mm | 45 x 130 58 x 161 44 x 168 37 x 200 36.5 x 185 |
| max. RCF ^{2,1)} | 984 984 961 961 912 |
| radius in mm | 220 220 215 215 204 |
| Cat. No. | ASTM ^{2,1)} 0528 ^{2,1)} ASTM ^{2,1)} 0531 ^{2,1)} Babcock |

| | |
|---|--------------------------------|
|  | |
| Adapter | |
| boring Ø x L in mm | - - - - - |
| tubes per rotor | 4 4 4 4 4 |
| Cat. No. | 4278-A 0771 4277 4276-B 0703-A |


SWING-OUT ROTOR, 4-PLACE | 5694 (NOT FOR 46 H)

| | | | |
|---|---------------------------------|--|------|
|  | |  | |
| Rotor | | Bucket | |
| max. RPM max. RCF | 4,000 min ⁻¹ 3,095 | Cat. No. | 5053 |
| max. capacity | 4 x 100 ml | | |
| run-up run-down, braked in sec | 40 45 | | |
| angle max. noise level | 90° 58 dB (A) | | |
| Cat. No. | 5694 | | |

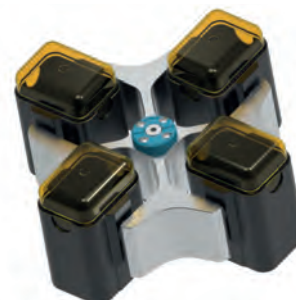

| | |
|--|---|
|  | |
| Tubes | |
| capacity in ml | 3 5 6 7 9 15 25 50 100 100 15 50 12 50 |
| Ø x L in mm | 10 x 60 12 x 75 12 x 82 12 x 100 14 x 100 17 x 100 24 x 100 34 x 100 44 x 100 40 x 115 17 x 120 29 x 115 17 x 100 29 x 115 |
| max. RCF ²⁾ | 2,737 2,773 2,773 2,755 2,773 2,755 2,755 2,755 2,755 2,755 2,898 2,844 2,898 2,755 |
| radius in mm | 153 155 155 154 155 154 154 154 154 154 162 158 162 154 |
| Cat. No. | tubes ²⁾ tubes with screw cap |
|  | |
| Adapter | |
| boring Ø x L in mm | 11 x 44 12.5 x 39.5 12.5 x 39.5 12.5 x 82.5 16 x 50 17.5 x 82.5 26 x 82.5 36 x 82.5 45.5 x 82.5 42 x 82.5 17 x 90 30 x 82.5 17 x 90 36 x 82.5 |
| tubes per rotor | 80 80 80 80 48 48 20 8 4 4 28 8 28 8 |
| Cat. No. | 5267 5227 5227 5247 ¹⁹⁾ 5264 5248 ¹⁹⁾ 5242 5243 5262 5249 6306 5259 6306 5243 ⁴⁾ |

SWING-OUT ROTOR, 4-PLACE | 5694 (NOT FOR 46 H)



Rotor

| | |
|-----------------------------------|---------------------------------|
| max. RPM max. RCF ²⁾ | 4,000 min ⁻¹ 3,095 |
| max. capacity | 4 x 290 ml |
| run-up run-down, braked in sec | 40 45 |
| angle max. noise level | 90° 58 dB (A) |
| Cat. No. | 5694 |



Bucket

| | |
|---------------------------|-------------|
| lid bioseal ³⁾ | 5093 |
| Cat. No. | 5092 |



Tubes

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------|----------|----------|----------|----------|----------|----------|----------|-----------------------------|----------|----------|---------|----------|---------|---------------------------|
| capacity in ml | 5 | 7 | 15 | 25 | 50 | 100 | 100 | 250 | 15 | 50 | 12 | 25 | 30 | 25 | 250 |
| Ø x L in mm | 13 x 75 | 12 x 100 | 17 x 100 | 24 x 100 | 34 x 100 | 44 x 100 | 40 x 115 | 65 x 115 | 17 x 120 | 29 x 115 | 17 x 100 | 25 x 90 | 25 x 110 | 25 x 90 | 61 x 122 |
| max. RCF ²⁾ | 3,005 | 3,005 | 2,952 | 2,898 | 2,952 | 2,952 | 2,952 | 3,095 | 3,095 | 3,095 | 3,005 | 2,826 | 2,898 | 2,826 | 3,095 |
| radius in mm | 168 | 168 | 165 | 162 | 165 | 165 | 165 | 173 | 173 | 173 | 168 | 158 | 162 | 158 | 173 |
| Cat. No. | tubes⁴⁾ | | | | | | | | tubes with screw cap | | | | | | 5127²⁴⁾ |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.8 x 42 | 13.2 x 82 | 17.5 x 56.7 | 25.5 x 74 | 35.5 x 77.5 | 45.5 x 76.5 | 42 x 76.5 | 66 x 103 | 17 x 85 | 30 x 85 | 17.5 x 79.5 | 26 x 73 | 25.5 x 74 | 26 x 73 | 62 x 90 |
| tubes per rotor | 48 | 48 | 32 | 16 | 4 | 4 | 4 | 8 | 28 | 8 | 28 | 12 | 16 | 12 | 4 |
| Cat. No. | 5128 | 5120 | 5136 | 5122 | 5124 | 5125 | 5126 | 1791 | 5129 | 5123 | 5121 | 5134 | 5122 | 5134 | 6319 |



Tubes

| | |
|------------------------|------------|
| capacity in ml | 290 |
| Ø x L in mm | 62 x 137 |
| max. RCF ²⁾ | 3,095 |
| radius in mm | 173 |
| Cat. No. | 290 |



Adapter

| | |
|--------------------|-------------|
| boring Ø x L in mm | 62 x 90 |
| tubes per rotor | 4 |
| Cat. No. | 6319 |



- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 2.1) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of vessels used should be verified with the individual manufacturers. The max. RCF for ASTM Tubes annotated with footnote 2) is 700.
- 3.1.1) When using these tubes, bucket 5051 cannot be closed with lid 5053.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2-020.
- 6) A rubber stopper for closing the tube for agitating or mixing is available under Cat. No. 0535. The tube may not be centrifuged with the stopper.
- 15) Also available with decanting aid. (Cat. No. 5247-91 or 5248-91).
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.
- 30) In the heatable models 5660-50, 5660-51, 5660-70, 5670-50 and 5675-50, rotor 4619 may only be used up to a maximum of +40 °C.

FLOORSTANDING CENTRIFUGES

High performance, throughput and capacity



ROTANTA 460 RC | 460 RF
on page 138



ROTIXA 500 RS
on page 140



ROTO SILENTA 630 RS
on page 152



04

FLOORSTANDING
CENTRIFUGES

ROTANTA 460 RC | 460 RF

The capability of a benchtop without the footprint

This modified version of the standard ROTANTA 460 allows for space saving storage below the bench and frees valuable working space on the benchtop. Both units include refrigeration with a temperature range from -20 °C to +40 °C.

— FEATURES

- RPM: 50 - 15,000 min⁻¹ – adjustable in increments of 10
- RCF: 1 - 24,400 – adjustable in increments of 1
- Available in two versions as a floor-standing unit or under-bench model
- Max. capacity: 4 x 1,000 ml
- Choice of 8 rotors
- Medical device according to regulation (EU) 2017/745
- 9 individual acceleration and 19 deceleration stages
- Easy operation with keypad and control knob
- 98 program memories for more individuality
- Refrigerated from -20 to +40 °C with pre-cooling function

— FIELDS OF APPLICATION

- Hospitals
- Blood centers
- Cell Culture Laboratories



Centrifuge packages for the model can be found on [page 130](#)



More information about the control panel can be found on [page 202](#)



ROTANTA 460 RC











ROTANTA 460 RF

TECHNICAL DATA

| | ROTANTA 460 RC refrigerated | ROTANTA 460 RF refrigerated |
|--|---|---|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ |
| frequency | 50 Hz | 50 Hz |
| consumption | 1,800 VA | 2,000 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 4 x 1,000 ml | 4 x 1,000 ml |
| max. RPM | 15,000 min ⁻¹ | 15,000 min ⁻¹ |
| max. RCF | 24,400 | 24,400 |
| running time | 1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode | 1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode |
| dimensions (WxDxH) | 554x697x683 mm | 554x697x961 mm |
| weight | approx. 140 kg | approx. 164 kg |
| noise level | 60 dB (A) with rotor 4474 | 60 dB (A) with rotor 4474 |
| temperature control, infinitely variable | from -20 to +40 °C | from -20 to +40 °C |
| Cat. No. | 5670 | 5675 |
| 100 – 127 V 1 ~ / 60 Hz ¹⁾ | - | 5675-01 |
| emission, immunity | - | FCC class B |
| weight | - | approx. 174 kg |

*) Other voltages on request.

AVAILABLE ROTORS (identical to the ROTANTA 460 | 460 R)

| SWING-OUT ROTORS | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|--------------------------|-------|--|---------------|---------------|------|
|  | swing-out rotor, 4-place | 90° | 4,600 min ⁻¹ | 4x750 ml | 5699-R | 116 |
|  | swing-out rotor, 4-place | 90° | 3,800 min ⁻¹ | 4x750 ml | 5654 | 123 |
|  | swing-out rotor, 6-place | 90° | 4,000 min ⁻¹ | 6x290 ml | 4446 | 125 |
|  | swing-out rotor, 4-place | 90° | 2,000 min ⁻¹ | 4x100 ml | 4474 | 127 |
|  | swing-out rotor, 2-place | 90° | 5,900 min ⁻¹ / 6,200 min ⁻¹ | 12 plates | 5622 | 127 |
| ANGLE ROTORS | | | | | | |
|  | angle rotor, 30-place | 45° | 15,000 min ⁻¹ | 30x2 ml | 4489-A | 128 |
|  | angle rotor, 6-place | 25° | 8,500 min ⁻¹ / 9,500 min ⁻¹ | 6x250 ml | 5645 | 128 |
|  | angle rotor, 6-place | 45° | 11,500 min ⁻¹ | 6x94 ml | 5615 | 129 |

ROTIXA 500 RS

Small footprint – high volumes

Its durable components make the ROTIXA 500 RS a reliable unit with a long service life. High sample capacity and maximum RCF of 18,038 make it suitable for 4 x 450-1,000 ml blood bags. Specially designed buckets keep blood bags upright during centrifugation for improved separation of blood components.

In industrial research labs, it accommodates 4 bottles up to 1,000 ml, specialty racks, as well as containers and vessels for various applications. This unit includes refrigeration with a temperature range from -20 °C to +40 °C.

— FEATURES

- RPM: 50 - 11,500 min⁻¹ – adjustable in increments of 10
- RCF: 50 - 18,038 – adjustable in increments of 1
- Max. capacity: 4 x 1,000 ml
- Choice of 5 rotors
- Medical device according to regulation (EU) 2017/745
- Easy operation with keypad and control knob
- 89 program memories for more individuality
- 9 individual acceleration and 19 deceleration stages

— FIELDS OF APPLICATION

- Hospitals
- Blood centers
- Cell Culture Laboratories



Documentation system for blood banks.
More information on [page 162](#)



More information about the control panel
can be found on [page 202](#)



TECHNICAL DATA

ROTIXA 500 RS ^{>)} refrigerated




| | | |
|--|-------------------------------------|-----------|
| voltage ^{*)} | 230 – 240 V 1 ~ | 220 V 1 ~ |
| frequency | 50 Hz | 60 Hz |
| consumption | 3,800 VA | |
| emission, immunity | EN/IEC 61326-1, class B | |
| max. capacity | 4 x 1,000 ml | |
| max. RPM | 11,500 min ⁻¹ | |
| max. RCF | 18,038 | |
| running time | 1 – 999 min: 59 s, ∞ continuous run | |
| dimensions (WxDxH) | 650x814x973 mm | |
| weight | approx. 219 kg | |
| noise level | 58 dB (A) with rotor 4282 | |
| temperature control, infinitely variable | from -20 to +40 °C | |
| Cat. No. | 4950 | |

^{*)} Other voltages on request.



^{>)} Other models models on request.

AVAILABLE ROTORS

SWING-OUT ROTORS

| | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|--------------------------|-------|-------------------------|---------------|-------------|------|
|  | swing-out rotor, 4-place | 90° | 4,500 min ⁻¹ | 4 x 1,000 ml | 4294 | 142 |
|  | swing-out rotor, 6-place | 90° | 4,000 min ⁻¹ | 6 x 250 ml | 4296 | 147 |
|  | swing-out rotor, 2-place | 90° | 3,600 min ⁻¹ | 20 plates | 4282 | 149 |

ANGLE ROTORS

| | | | | | | |
|---|----------------------|-----|--------------------------|------------|-------------|-----|
|  | angle rotor, 6-place | 25° | 9,500 min ⁻¹ | 6 x 250 ml | 4266 | 150 |
|  | angle rotor, 6-place | 45° | 11,500 min ⁻¹ | 6 x 94 ml | 4246 | 151 |

SWING-OUT ROTOR, 4-PLACE | 4294


Rotor

| | |
|---|---------------------------------|
| max. RPM max. RCF ²⁾ | 4,500 min ⁻¹ 4,958 |
| max. capacity | 4 x 750 ml |
| run-up run-down, braked in sec | 115 116 |
| angle temperature in °C ¹⁾ | 90° +6 |
| Cat. No. | 4294 |



Bucket

| | |
|----------|--------|
| lid | 4229-B |
| Cat. No. | 4295-A |



Tubes

| | | | | | | | | | | | | | | |
|------------------------|------------------|-------|-------|---------------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| capacity in ml | 0.8 | 1.5 | 2.0 | 4 | 5 | 6 | 7 | 9 | 12 | 15 | 25 | 50 | 94 | 100 |
| Ø x L in mm | 8x45 | 11x38 | 11x38 | 10x88 | 12x75 | 12x82 | 12x100 | 14x100 | 16x101 | 17x100 | 24x100 | 34x100 | 38x102 | 40x115 |
| max. RCF ²⁾ | 4,777 | 3,690 | 4,867 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 |
| radius in mm | 211 | 163 | 215 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 |
| Cat. No. | microliter tubes | | | tubes ²⁾ | | | | | | | | | | |

Adapter

| | | | | | | | | | | | | | | |
|--------------------|--------|---------|---------|-------|---------|---------|---------|-------|-------|---------|-------|-------|---------|---------|
| boring Ø x L in mm | 8.2x32 | 11.2x40 | 11.2x40 | 11x70 | 12.5x32 | 12.5x70 | 12.5x70 | 16x70 | 16x70 | 17.5x74 | 26x70 | 35x70 | 41.5x70 | 41.5x70 |
| tubes per rotor | 312 | 336 | 336 | 252 | 192 | 192 | 192 | 100 | 100 | 120 | 44 | 24 | 16 | 16 |
| Cat. No. | 4226 | 4225 | 4225 | 4224 | 4213-93 | 4213 | 4213 | 4223 | 4223 | 4214 | 4215 | 4216 | 4218 | 4218 |

Tubes

| | | | | | | | | | | | | | | |
|------------------------|--------------------------------|---------|---------|---------|---------|---------|----------|---------|----------|---------|----------|----------|----------------------|----------|
| capacity in ml | 2.6–3.4 | 2.7–3 | 4–5.5 | 4.5–5 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8 | 8.5–10 | 15 | 50 |
| Ø x L in mm | 13 x 65 | 11 x 66 | 15 x 75 | 11 x 92 | 15 x 92 | 16 x 92 | 15 x 102 | 13 x 75 | 13 x 100 | 16 x 75 | 16 x 125 | 16 x 100 | 17 x 120 | 29 x 115 |
| max. RCF ²⁾ | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,777 | 4,958 | 4,958 |
| radius in mm | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 211 | 219 | 219 |
| Cat. No. | blood collection / urine tubes | | | | | | | | | | | | tubes with screw cap | |

Adapter

| | | | | | | | | | | | | | | |
|--------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|---------|-------|--------|
| boring Ø x L in mm | 13.2x32 | 12.5x32 | 17.5x32 | 12.5x70 | 17.5x74 | 17.5x70 | 17.5x74 | 13.2x32 | 13.2x70 | 17.5x32 | 16x70 | 17.5x74 | 17x70 | 30x70 |
| tubes per rotor | 120 | 192 | 120 | 192 | 120 | 64 | 120 | 120 | 120 | 120 | 100 | 120 | 92 | 32 |
| Cat. No. | 4222-93 | 4213-93 | 4214-93 | 4213 | 4214 | 4220 | 4214 | 4222-93 | 4222 | 4214-93 | 4223 | 4214 | 4232 | 4245-A |

Tubes

| | | | | | | | | | | | |
|------------------------|----------------------|--------|--------|--------|--------|---------------------|---------------------|---------------------|----------|----------|----------------|
| capacity in ml | 12 | 30 | 50 | 100 | 100 | 250 | 650 | 750 | 750 | 250 | 500 |
| Ø x L in mm | 17x100 | 25x110 | 29x115 | 40x115 | 40x115 | 62 x 122 | 97 x 139 | 97 x 152 | 96 x 135 | 60 x 162 | 96 x 147 |
| max. RCF ²⁾ | 4,777 | 4,777 | 4,867 | 4,777 | 4,777 | 4,777 | 4,958 | 4,958 | 4,958 | 4,777 | 4,958 |
| radius in mm | 211 | 211 | 215 | 211 | 211 | 211 | 219 | 219 | 219 | 211 | 219 |
| Cat. No. | tubes with screw cap | | | | | 5127 ²⁴⁾ | 0554 ²⁴⁾ | 0512 ²⁴⁾ | 4234-A | Corning® | Corning® +4449 |

Adapter

| | | | | | | | | | | | |
|--------------------|---------|---------|---------|-----------|-----------|---------|----------|----------|----------|----------|----------|
| boring Ø x L in mm | 17.5x70 | 26 x 70 | 30 x 96 | 41.5 x 70 | 41.5 x 70 | 62 x 90 | 97.5x105 | 97.5x105 | 97.5x105 | 62 x 125 | 97.5x105 |
| tubes per rotor | 64 | 44 | 24 | 16 | 16 | 4 | 4 | 4 | 4 | 4 | 4 |
| Cat. No. | 4220 | 4215 | 4249 | 4218 | 4218 | 4238 | 4258 | 4258 | 4258 | 6322 | 4258 |

SWING-OUT ROTOR, 4-PLACE | 4294



Rotor

| | |
|-----------------------------------|---------------------------------|
| max. RPM max. RCF ²⁾ | 4.500 min ⁻¹ 4.618 |
| max. capacity | 40 x 50 ml |
| run-up run-down, braked in sec | 115 116 |
| angle | 90° |
| temperature in °C ¹⁾ | +2 |
| Cat. No. | 4294 |



Bucket

| | |
|---------------------------|-------------|
| lid bioseal ³⁾ | 4291 |
| Cat. No. | 4290 |

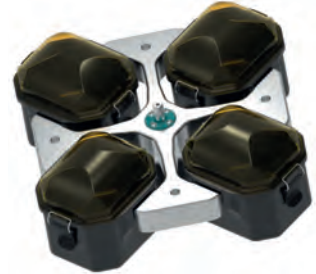

Tubes

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------|-------|--------|--------|--------|---------------------------------------|-------|-------|---------|-------|--------|---------|----------|-------|--------|
| | | | | | | | | | | | | | | | |
| capacity in ml | 5 | 6 | 7 | 9 | 14 | 2.6–3.4 | 4.9 | 4–5.5 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8.5–10 |
| Ø x L in mm | 12x75 | 12x82 | 12x100 | 14x100 | 16x101 | 13 x 65 | 13x90 | 15x75 | 15x92 | 16x92 | 15x102 | 13 x 75 | 13 x 100 | 16x75 | 16x100 |
| max. RCF ²⁾ | 4,551 | 4,551 | 4,551 | 4,551 | 4,551 | 4,551 | 4,551 | 4,551 | 4,551 | 4,573 | 4,573 | 4,551 | 4,551 | 4,551 | 4,551 |
| radius in mm | 201 | 201 | 201 | 201 | 201 | 201 | 201 | 201 | 201 | 202 | 202 | 201 | 201 | 201 | 201 |
| Cat. No. | tubes²⁾ | | | | | blood collection / urine tubes | | | | | | | | | |

Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 13.2x57 | 13.2x57 | 13.2x57 | 17.5 x 62 | 17.5 x 62 | 13.2x57 | 13.2x57 | 17.5 x 62 | 17.5 x 62 | 17.5 x 63 | 17.5 x 63 | 13.2 x 57 | 13.2 x 57 | 17.5 x 62 | 17.5 x 62 |
| tubes per rotor | 200 | 200 | 200 | 168 | 168 | 200 | 200 | 168 | 168 | 132 | 132 | 200 | 200 | 168 | 168 |
| Cat. No. | 4273 | 4273 | 4273 | 4338 | 4338 | 4273 | 4273 | 4338 | 4338 | 4311 | 4311 | 4273 | 4273 | 4338 | 4338 |

Tubes

| | | | | | | | | | |
|------------------------|-------------|-----------------------------|--------|--------|--------|--------|--------|--------|--------|
| | | | | | | | | | |
| capacity in ml | 15 | 10 | 12 | 15 | 15 | 50 | 50 | 50 | 50 |
| Ø x L in mm | 17x100 | 16x80 | 17x100 | 17x120 | 17x120 | 29x115 | 29x115 | 29x115 | 29x115 |
| max. RCF ²⁾ | 4,551 | 4,551 | 4,437 | 4,607 | 4,607 | 4,607 | 4,607 | 4,517 | 4,517 |
| radius in mm | 201 | 201 | 196 | 204 | 204 | 204 | 204 | 200 | 200 |
| Cat. No. | - 2) | tubes with screw cap | | | | | | | |

Adapter

| | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-----------------------------|-------------|-----------------------------|-------------|-----------------------------|
| | | | | | | | | | |
| boring Ø x L in mm | 17.5 x 62 | 17.5 x 62 | 17.2 x 57 | 17 x 60 | 17 x 60 | 30 x 60 | 30 x 60 | 30 x 56 | 30 x 56 |
| tubes per rotor | 168 | 168 | 112 | 68 | 112 | 32 | 40 | 32 | 40 |
| Cat. No. | 4338 | 4338 | 4310 | 4314 | 4320^{3,12)} | 4321 | 4323^{3,12)} | 4313 | 4339^{3,12)} |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.


2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

3.12) When using these tubes, bucket 4290 cannot be closed with lid 4291.

3.13) When using these tubes, bucket 4295-A cannot be closed with lid 4229-B.


24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.
















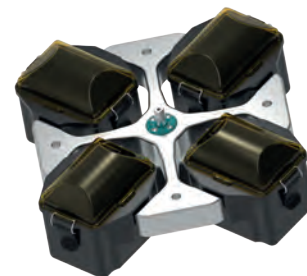

SWING-OUT ROTOR, 4-PLACE | 4294

| | |
|---|---------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF ²⁾ | 4,500 min ⁻¹ 4,573 |
| max. capacity | 24 plates |
| run-up run-down, braked in sec | 115 116 |
| angle temperature in °C ¹⁾ | 90° +5 |
| Cat. No. | 4294 |



| | |
|--|-------------|
|  | |
| Bucket | |
| lid bioseal [®] | 5629 |
| Cat. No. | 4280 |



| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |
| Plates | | | | | | | | |
| W x D x H in mm | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 128x86x46 | 128x86x83 | 124x82x20 | - |
| capacity in ml | - | - | - | - | - | - | - | 0.2 |
| max. RCF ²⁾ | 4,625 | 4,625 | 4,625 | 4,625 | 4,625 | 4,625 | 4,625 | 4,625 |
| radius in mm | 204 | 204 | 204 | 204 | 204 | 204 | 204 | 204 |
| Cat. No. | MTP | MTP | CP | DWP | MS | QP | PCR plates 96-plates | PCR strips |
|  |  |  |  |  |  |  |  |  |
| Removal aid | | | | | | | | |
| boring Ø x L in mm | - | - | - | - | - | - | - | - |
| plates / strips per rotor | 24 | 24 | 20 | 8 | 4 | 4 | 4 | 48 x 8 |
| Cat. No. | 4279 | 4279 | 4279 | 4279 | 4279 | 4279 | 4279 + 1485 | 4279 + 1485 |

SWING-OUT ROTOR, 4-PLACE | 4294



Rotor

| | |
|---|---------------------------------|
| max. RPM max. RCF ²⁾ | 4,500 min ⁻¹ 5,184 |
| max. capacity | 4 x 1,000 ml |
| run-up run-down, braked in sec | 115 116 |
| angle temperature in °C ¹⁾ | 90° +5 |
| Cat. No. | 4294 |



Bucket

| | |
|-----------------------|-------------|
| adapter including lid | 4255 |
| Cat. No. | 4254 |



Tubes

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------|--------|--------|--------|--------|--------|--------|---------------------------------------|-------|-------|-------|-------|---------|-------|--------|
| capacity in ml | 5 | 7 | 9 | 15 | 25 | 50 | 100 | 2.6–3.4 | 2.7–3 | 4–5.5 | 4.5–5 | 4.9 | 7.5–8.2 | 9–10 | 10 |
| Ø x L in mm | 12x75 | 12x100 | 14x100 | 17x100 | 24x100 | 34x100 | 44x100 | 13 x 65 | 11x66 | 15x75 | 11x92 | 13x90 | 15x92 | 16x92 | 15x102 |
| max. RCF ²⁾ | 4,618 | 4,618 | 4,777 | 4,777 | 4,505 | 4,573 | 4,551 | 4,618 | 4,618 | 4,777 | 4,618 | 4,618 | 4,777 | 4,777 | 4,777 |
| radius in mm | 204 | 204 | 211 | 211 | 199 | 202 | 201 | 204 | 204 | 211 | 204 | 204 | 211 | 211 | 211 |
| Cat. No. | tubes²⁾ | | | | | | | blood collection / urine tubes | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 13 x 58 | 13 x 58 | 17,5 x 60 | 17,5 x 60 | 26 x 72 | 36 x 79 | 45 x 78 | 13,5 x 58 | 13 x 58 | 17,5 x 60 | 13 x 58 | 13,5 x 58 | 17,5 x 60 | 17,5 x 60 | 17,5 x 60 |
| tubes per rotor | 120 | 120 | 76 | 76 | 28 | 16 | 8 | 84 | 120 | 76 | 120 | 84 | 76 | 76 | 76 |
| Cat. No. | 4433 | 4433 | 4434 | 4434 | 4438 | 4439 | 4442 | 4435 | 4433 | 4434 | 4433 | 4435 | 4434 | 4434 | 4434 |

Tubes

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------------------|--------|-------|-------|-----------------------------|--------|----------|--------|-------|----------|---------|---------------------------|------------------------|---------------------------|---------------------------|
| capacity in ml | 1.6–5 | 4–7 | 4–7 | 8 | 8.5–10 | 15 | 30 | 50 | 25 | 30 | 10 | 250 | 290 | 650 | 750 |
| Ø x L in mm | 13x75 | 13x100 | 16x75 | 16x81 | 16x100 | 17x120 | 25 x 110 | 29x115 | 25x90 | 25 x 110 | 16 x 80 | 61 x 122 | 62 x 137 | 97 x 139 | 97 x 152 |
| max. RCF ²⁾ | 4,618 | 4,618 | 4,777 | 4,777 | 4,777 | 4,890 | 4,709 | 4,890 | 4,709 | 4,709 | 4,777 | 5,003 | 5,003 | 5,184 | 5,184 |
| radius in mm | 204 | 204 | 211 | 211 | 211 | 216 | 208 | 216 | 208 | 208 | 211 | 221 | 221 | 229 | 229 |
| Cat. No. | blood collection / urine tubes | | | | tubes with screw cap | | | | | | | 5127²⁴⁾ | -²⁴⁾ | 0554²⁴⁾ | 0512²⁴⁾ |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|----------|----------|
| boring Ø x L in mm | 13,5 x 58 | 13,5 x 58 | 17,5 x 60 | 17,5 x 60 | 17,5 x 60 | 17 x 86 | 26 x 72 | 30 x 87 | 26 x 72 | 26 x 72 | 17,5 x 60 | 62 x 92 | 62 x 92 | 98 x 138 | 98 x 138 |
| tubes per rotor | 84 | 84 | 76 | 76 | 76 | 48 | 28 | 20 | 28 | 28 | 76 | 4 | 4 | 4 | 4 |
| Cat. No. | 4435 | 4435 | 4434 | 4434 | 4434 | 4437 | 4438 | 4441 | 4438 | 4438 | 4434 | 4443 | 4443 | - | - |

Tubes

| | | | | | | | | |
|------------------------|---------------------------|-------------|---------------|----------------|--------------|---------------|-----------------|-----------------|
| capacity in ml | 1,000 | 1,000 | 175 | 175 | 200 | 225 | 250 | 500 |
| Ø x L in mm | 96 x 176 | 98 x 138 | 61 x 118 | 61,5x144,3 | 60 x 130 | 61 x 137 | 60 x 162 | 96 x 147 |
| max. RCF ²⁾ | 5,184 | 5,184 | 5,184 | 5,184 | 5,184 | 5,184 | 5,184 | 5,184 |
| radius in mm | 229 | 229 | 229 | 229 | 229 | 229 | 229 | 229 |
| Cat. No. | 4239²⁴⁾ | 4255 | Falcon | Nalgene | Nunc® | Falcon | Corning® | Corning® |



Adapter

| | | | | | | | | |
|--------------------|----------|----------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 98 x 138 | - | - | - | - | - | - | - |
| tubes per rotor | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Cat. No. | - | - | 4440 | 4430 | 4430 | 4440 | 4430 | 4449 |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.15) When using these tubes, bucket 4255 cannot be closed with its lid.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 4-PLACE | 4294

| | |
|---|---------------------------------|
| Rotor | |
| max. RPM max. RCF ²⁾ | 4,500 min ⁻¹ 5,252 |
| max. capacity | 4 blood bags |
| run-up run-down, braked in sec | 115 116 |
| angle temperature in °C ¹⁾ | 90° +2 |
| Cat. No. | 4294 |




Bucket
Cat. No.



4293



| | |
|------------------------|-------------------|
| Blood bags | |
| capacity in ml | 450 500 |
| blood bags | 3-place 3-place |
| max. RCF ²⁾ | 5,252 5,252 |
| radius in mm | 232 232 |
| Cat. No. | blood bags |



Insert

boring Ø x L in mm
blood bags per rotor



- -
4 4

Cat. No. **4244-A 4244-A**



Additional blood bank accessories can be found on [page 185](#)

SWING-OUT ROTOR, 4-PLACE | 4294

| | |
|---|---------------------------------|
| Rotor | |
| max. RPM max. RCF ²⁾ | 4,500 min ⁻¹ 5,071 |
| max. capacity | 4 blood bags |
| run-up run-down, braked in sec | 115 116 |
| angle temperature in °C ¹⁾ | 90° +3 |
| Cat. No. | 4294 |




Bucket
Cat. No.



4298-A



| | |
|------------------------|---------------------------------|
| Blood bags | |
| capacity in ml | 450 500 750 1,000 |
| blood bags | 4-place 4-place 1-place 1-place |
| max. RCF ²⁾ | 5,003 5,003 5,003 5,071 |
| radius in mm | 221 221 221 224 |
| Cat. No. | blood bags |

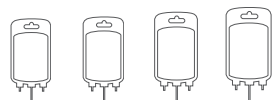

Insert

boring Ø x L in mm
blood bags per rotor



- - - -
4 4 4 4

Cat. No. **4237-A 4237-A 4237-A -**



Additional blood bank accessories can be found on [page 185](#)

- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

SWING-OUT ROTOR, 6-PLACE | 4296




Rotor

| | |
|-----------------------------------|---------------------------------|
| max. RPM max. RCF ²⁾ | 4,000 min ⁻¹ 3,363 |
| max. capacity | 6 x 100 ml |
| run-up run-down, braked in sec | 33 50 |
| angle max. noise level | 90° 52 dB (A) |
| temperature in °C ¹⁾ | 0 |
| Cat. No. | 4296 |



Bucket

| | |
|-----------------|-------------|
| lid | 5053 |
| Cat. No. | 5051 |



Vessels

| | | | | | | | | | | | | | | |
|------------------------|-------------------------|---------------|-------|-------|---------------------------|-------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| capacity in ml | 1.5 | 2 | 1.5 | 2 | 5 | 6 | 7 | 9 | 15 | 25 | 50 | 100 | 100 | 1-8 |
| Ø x L in mm | 11x38 | 11x38 | 11x38 | 11x38 | 12x75 | 12x82 | 12x100 | 14x100 | 17x100 | 24x100 | 34x100 | 44x100 | 40x115 | simple / multiple |
| max. RCF ²⁾ | 2,486 / 3,363 | 2,486 / 3,363 | 3,363 | 3,363 | 3,309 | 3,309 | 3,291 | 3,309 | 3,291 | 3,291 | 3,291 | 3,291 | 3,291 | 2,290 / 3,274 |
| radius in mm | 139 / 188 | 139 / 188 | 188 | 188 | 185 | 185 | 184 | 185 | 184 | 184 | 184 | 184 | 184 | 128 / 183 |
| Cat. No. | microliter tubes | | | | tubes²⁾ | | | | | | | | | cyto chambers |



Adapter

| | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------------------|-------------|---------------------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.5x42 | 12.5x42 | 11.5x50 | 11.5x50 | 12.5x42 | 12.5x42 | 12.5x86 | 16x50 | 17.5x86 | 26x86 | 36x86 | 45.5x86 | 42x86 | - |
| vessels per rotor | 240 | 240 | 96 | 96 | 120 | 120 | 120 | 72 | 72 | 30 | 12 | 6 | 6 | 12 |
| Cat. No. | 5257 | 5257 | 5281 | 5281 | 5227 | 5227 | 5247¹⁵⁾ | 5264 | 5248¹⁵⁾ | 5242 | 5243 | 5262 | 5249 | 5280 |

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------------------|---------|---------|---------|---------|-------|---------|-------|-------|-------|--------|-----------------------------|--------|--------|--------|
| capacity in ml | 1.1-1.4 | 2.6-2.9 | 2.7-3 | 4-5.5 | 4.5-5 | 4.9 | 7.5-8.2 | 9-10 | 1.6-5 | 4-7 | 8.5-10 | 15 | 50 | 15 | 30 |
| Ø x L in mm | 8x66 | 13x65 | 11 x 66 | 15 x 75 | 11 x 92 | 13x90 | 15x92 | 16x92 | 13x75 | 16x75 | 16x100 | 17x120 | 29x115 | 17x100 | 25x110 |
| max. RCF ²⁾ | 3,274 | 3,345 | 3,309 | 3,309 | 3,309 | 3,345 | 3,309 | 3,291 | 3,345 | 3,309 | 3,291 | 3,434 | 3,363 | 3,434 | 3,291 |
| radius in mm | 183 | 187 | 185 | 185 | 185 | 187 | 185 | 184 | 187 | 185 | 184 | 192 | 188 | 192 | 184 |
| Cat. No. | blood collection / urine tubes | | | | | | | | | | | tubes with screw cap | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 11 x 44 | 13.5x52 | 12.5x42 | 16x50 | 12.5x42 | 13.5x52 | 16x50 | 17,6x82,5 | 13.5x52 | 16x50 | 17,5x82,5 | 17x90 | 30x82,5 | 17x90 | 26 x 82,5 |
| vessels per rotor | 120 | 72 | 120 | 72 | 120 | 72 | 72 | 66 | 72 | 72 | 72 | 42 | 12 | 42 | 30 |
| Cat. No. | 5267 | 5268 | 5227 | 5264 | 5227 | 5268 | 5264 | 5258 | 5268 | 5264 | 5248 | 6306 | 5259 | 6306 | 5266 |

Vessels

| | |
|------------------------|-----------------------------|
| capacity in ml | 50 |
| Ø x L in mm | 29x115 |
| max. RCF ²⁾ | 3,291 |
| radius in mm | 184 |
| Cat. No. | tubes with screw cap |



Adapter

| | |
|--------------------|-------------|
| boring Ø x L in mm | 26 x 82,5 |
| vessels per rotor | 12 |
| Cat. No. | 5243 |

- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 1.1) When using these tubes, bucket 5051 cannot be closed with lid 5053.

SWING-OUT ROTOR, 6-PLACE | 4296




Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 3,631 |
| max. capacity | 6 x 250 ml |
| run-up run-down, braked in sec | 33 50 |
| angle max. noise level | 90° 59 dB (A) |
| temperature in °C ¹⁾ | -2 |
| Cat. No. | 4296 |

Bucket

| | |
|---------------------------|-------------|
| lid bioseal ⁵⁾ | 5093 |
| Cat. No. | 5092 |

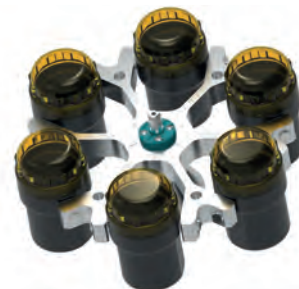

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------|-------|--------|--------|--------|--------|--------|--------|--------|---------------------------------------|---------|---------|-------|-------|-------|
| capacity in ml | 5 | 6 | 7 | 15 | 25 | 50 | 100 | 100 | 250 | 1.1–1.4 | 1.1–1.4 | 2.6–2.9 | 2.7–3 | 2.7–3 | 4.9 |
| Ø x L in mm | 12x75 | 12x82 | 12x100 | 17x100 | 24x100 | 34x100 | 44x100 | 40x115 | 65x115 | 8 x 66 | 8 x 66 | 13 x 65 | 11x66 | 11x66 | 13x90 |
| max. RCF ²⁾ | 3,542 | 3,542 | 3,542 | 3,488 | 3,434 | 3,488 | 3,488 | 3,488 | 3,641 | 3,488 | 3,077 | 3,077 | 3,488 | 3,077 | 3,488 |
| radius in mm | 198 | 198 | 198 | 195 | 192 | 195 | 195 | 195 | 203 | 195 | 172 | 172 | 195 | 172 | 195 |
| Cat. No. | tubes²⁾ | | | | | | | | | blood collection / urine tubes | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 12.8x42 | 12.8x42 | 12.8x79.5 | 17.5x56.7 | 25.5x74 | 35.5x77.5 | 45.5x85 | 42x86.5 | 66x103 | 13.5x56.7 | 12.8x54.5 | 12.8x54.5 | 13.5x56.7 | 12.8x54.5 | 13.5x56.7 |
| vessels per rotor | 72 | 72 | 72 | 48 | 24 | 6 | 6 | 6 | 6 | 48 | 72 | 72 | 48 | 72 | 48 |
| Cat. No. | 5128 | 5128 | 5120 | 5136 | 5122 | 5124 | 5125 | 5126 | 1791 | 5137 | 5138 | 5138 | 5137 | 5138 | 5137 |

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|--------------------------------|-------|---------|-------|--------|-------|-------|--------|--------|--------|----------------------|--------|-------|----------|--------|
| capacity in ml | 4–4.5 | 4.5–5 | 7.5–8.2 | 9–10 | 10 | 1.6–5 | 4–7 | 4–7 | 8 | 8.5–10 | 15 | 50 | 25 | 30 | 50 |
| Ø x L in mm | 15x75 | 11x92 | 15x92 | 16x92 | 15x102 | 13x75 | 16x75 | 13x100 | 16x125 | 16x100 | 17x120 | 29x115 | 25x90 | 25 x 110 | 29x115 |
| max. RCF ²⁾ | 3,488 | 3,542 | 3,488 | 3,488 | 3,488 | 3,077 | 3,488 | 3,542 | 3,542 | 3,488 | 3,631 | 3,631 | 3,363 | 3,434 | 3,560 |
| radius in mm | 195 | 198 | 195 | 195 | 195 | 172 | 195 | 198 | 198 | 195 | 203 | 203 | 188 | 192 | 199 |
| Cat. No. | blood collection / urine tubes | | | | | | | | | | tubes with screw cap | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17.5x56.7 | 12.8x79.5 | 17.5x56.7 | 17.5x56.7 | 17.5x56.7 | 12.8x54.5 | 17.5x56.7 | 12.8x79.5 | 17.5x79.5 | 17.5x56.7 | 17x85 | 30x85 | 26x73 | 25.5x87 | 30x99 |
| vessels per rotor | 48 | 72 | 48 | 48 | 48 | 72 | 48 | 72 | 42 | 48 | 42 | 12 | 18 | 24 | 12 |
| Cat. No. | 5136 | 5120 | 5136 | 5136 | 5136 | 5138 | 5136 | 5120 | 5121⁴⁾ | 5136 | 5129 | 5123 | 5134 | 5122 | 5135 |

Vessels

| | | | |
|------------------------|----------|---------------------------|------------------------|
| capacity in ml | 10 | 250 | 290 |
| Ø x L in mm | 16 x 80 | 61 x 122 | 62 x 137 |
| max. RCF ²⁾ | 3,488 | 3,631 | 3,631 |
| radius in mm | 195 | 203 | 203 |
| Cat. No. | - | 5127²⁴⁾ | -²⁴⁾ |



Adapter

| | | | |
|--------------------|-------------|-------------|-------------|
| boring Ø x L in mm | 17.5x56.7 | 62x90 | 62x90 |
| vessels per rotor | 48 | 6 | 6 |
| Cat. No. | 5136 | 6319 | 6319 |

- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3,4) When using these tubes, bucket 5051 or 5092 cannot be closed with lid 5053 or 5093.
- 4) Please remove the spacer.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 2-PLACE | 4282

| | |
|----------------------------------|---------------------------------|
| Rotor | |
| max. RPM max. RCF | 3,600 min ⁻¹ 2,652 |
| max. capacity | 20 plates |
| run-up run-down, braked in sec | 87 94 |
| angle max. noise level | 90° 58 dB (A) |
| temperature in °C ¹⁾ | -2 |
| Cat. No. | 4282 |



| | |
|-----------------|---------------|
| Bucket | |
| Cat. No. | 4285-A |



| | | | | | | | |
|------------------------|------------|-------------|-----------|-------------|-----------|-------------------|-------------------|
| Plates | | | | | | | |
| | | | | | | | |
| W x D x H in mm | 128x86x15 | 128x86x17.5 | 128x86x22 | 128x86x44.5 | 84x59x46 | 124x82x20 | - |
| max. RCF ²⁾ | 2,434 | 2,434 | 2,434 | 2,434 | 2,434 | 2,434 | 2,434 |
| radius in mm | 168 | 168 | 168 | 168 | 168 | 168 | 168 |
| Cat. No. | MTP | MTP | CP | DWP | MS | PCR plates | PCR strips |



| | | | | | | | |
|---------------------------|-------------|-------------|-------------|-------------|-------------|------------------|------------------|
| Removal aid | | | | | | | |
| | | | | | | | |
| boring Ø x L in mm | - | - | - | - | - | - | - |
| plates / strips per rotor | 16 | 12 | 12 | 4 | 4 | 4 | 48 x 8 |
| Cat. No. | 4281 | 4281 | 4281 | 4281 | 4281 | 4281+1485 | 4281+1485 |


| | | | | |
|------------------------|----------------------|----------------------|----------------------|-----------------------|
| Racks | | | | |
| | | | | |
| W x D x H in mm | 176x20x41 | 118x20x70 | 193x25x60 | 210x110x44 |
| max. RCF ²⁾ | 2,652 | 2,652 | 2,652 | 2,579 |
| radius in mm | 183 | 183 | 183 | 178 |
| Cat. No. | Olympus Racks | Hitachi Racks | Behring Racks | Rack, 50-place |



| | | | | |
|--------------------------|---------------|---------------|---------------|---------------|
| Adapter | | | | |
| | | | | |
| boring Ø x L in mm | - | - | - | - |
| plates / racks per rotor | 12 | 20 | 10 | 2 |
| Cat. No. | 4283-B | 4287-B | 4288-A | 4263-A |

1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
 The max. RCF for glass tubes annotated with footnote 2) is 4,000.

ANGLE ROTOR, 6-PLACE | 4266










| | |
|----------------------------------|---|
| Rotor |  |
| max. RPM max. RCF | 9,500 min ⁻¹ 14,025 |
| max. capacity | 6 x 250 ml |
| run-up run-down, braked in sec | 82 96 |
| angle | 25° |
| temperature in °C ¹⁾ | +2 |
| Cat. No. | 4266 |










+ Lid bioseal⁵⁾ and phenol-resistant
Cat. No.



INCLUSIVE




| | | | | | | | | | |
|------------------------|---|---|---|---|---|---|---|---|--|
| Vessels |  |  |  |  |  |  |  |  |  |
| capacity in ml | 15 | 25 | 94 | 10 | 30 | 50 | 85 | 94 | 250 |
| Ø x L in mm | 17 x 100 | 24 x 100 | 38 x 102 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | 38 x 102 | 61.5 x 122 |
| max. RCF ²⁾ | 13,319 | 12,915 | 12,310 | 13,420 | 12,915 | 12,108 | 12,310 | 12,310 | 14,025 |
| radius in mm | 132 | 128 | 122 | 133 | 128 | 120 | 122 | 122 | 139 |
| Cat. No. | tubes²⁾ | | | tubes with screw cap | | | | | 5127²⁴⁾ |

| | | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---|--|
| Adapter |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | 17.6 x 83 | 26 x 80 | 38.6 x 88 | 16.6 x 70 | 26 x 80 | 29 x 90 | 38.6 x 88 | 38.6 x 88 | 61.5 x 109 |
| vessels per rotor | 42 | 18 | 6 | 48 | 18 | 6 | 6 | 6 | 6 |
| Cat. No. | 5646 | 5642 | 5644 | 5641 | 5642 | 5643 | 5644 | 5644 | - |

- Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

— ANGLE ROTOR, 6-PLACE | 4246
















| | |
|---|-----------------------------------|
|  | |
| Rotor | |
| max. RPM max. RCF | 11,500 min ⁻¹ 18,038 |
| max. capacity | 6 x 94 ml |
| run-up run-down, braked in sec | 64 64 |
| angle | 45° |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 4246 |

Lid bioseal[®] and phenol-resistant
Cat. No.





















INCLUSIVE







| | | | | | | | | | | | | | | | | |
|------------------------|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Vessels | |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| capacity in ml | | 0.5 | 1.5 | 2.0 | 3 | 15 | 25 | 50 | 94 | 7.5 – 8.2 | 9 – 10 | 10 | 8.5 – 10 | 5 | 15 | 50 |
| Ø x L in mm | | 10.7x46 | 11x38 | 11x38 | 10x60 | 17x100 | 24x100 | 34x100 | 38x102 | 15x92 | 16x92 | 15x102 | 16x100 | 17x51 | 17x120 | 29x115 |
| max. RCF ²⁾ | | 17,299 | 17,299 | 17,299 | 17,299 | 17,003 | 16,560 | 17,743 | 18,038 | 17,003 | 17,003 | 17,003 | 17,003 | 16,856 | 17,299 | 17,595 |
| radius in mm | | 117 | 117 | 117 | 117 | 115 | 112 | 120 | 122 | 115 | 115 | 115 | 115 | 114 | 117 | 119 |
| Cat. No. | | pediatric | microliter tubes | | | tubes²⁾ | | | | blood collection / urine tubes | | | | - | tubes with screw cap | |



| | | | | | | | | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---|--|---|---|---|---|---|-----------|
| Adapter |  |  |  |  |  |  |  |  |  |  |  |  |  |  | |
| boring Ø x L in mm | 11.4x39 | 11.4x39 | 11.4x39 | 11.4x39 | 17.5x91.5 | 26x85 | 35x89.3 | 38.2x89.6 | 17.5x91.5 | 17.5x91.5 | 17.5x91.5 | 17.5x91.5 | 17x51 | 17x106 | 29.8x96.7 |
| vessels per rotor | 24 | 24 | 24 | 24 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 6 |
| Cat. No. | 1449 | 1449 | 1449 | 1449 | 1451 | 1447 | 1463 | - | 1451 | 1451 | 1451 | 1451 | 1476 | 1466 | 1454 |

| | | | | | |
|------------------------|--|---|---|---|---|
| Vessels | |  |  |  |  |
| capacity in ml | | 10 | 30 | 50 | 85 |
| Ø x L in mm | | 16x80 | 26x95 | 29x107 | 38 x 106 |
| max. RCF ²⁾ | | 17,003 | 16,560 | 17,299 | 18,038 |
| radius in mm | | 115 | 112 | 117 | 122 |
| Cat. No. | | tubes with screw cap | | | |



| | | | | | |
|--------------------|--|---|---|---|---|
| Adapter | |  |  |  |  |
| boring Ø x L in mm | | 16.5x74 | 26x85 | 29x92 | 38.2x89.6 |
| vessels per rotor | | 12 | 6 | 6 | 6 |
| Cat. No. | | 1448 | 1447 | 1446 | - |

- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

ROTO SILENTA 630 RS

Your first choice up to 12 liters

The ROTO SILENTA 630 RS is highly rated in the rapid and efficient centrifugation of blood bags. It is able to spin up to 12 liter of sample or 12 blood bags per run. Four and six-place rotor options are also available to offer the best possible fit.

In industrial or R&D applications the ROTO SILENTA accommodates six vessels up to 2,000 ml each. This unit includes refrigeration with a temperature range from -20°C to +40°C.

— FEATURES

- RPM: 50 - 6,000 min⁻¹ – adjustable in increments of 10
- RCF: 1 - 6,520 – adjustable in increments of 1
- Max. capacity: 6 x 2,000 ml
- The first choice in blood banking centrifuges
- Choice of 3 rotors
- Medical device according to regulation (EU) 2017/745
- Easy operation with keypad and control knob
- 89 program memories for more individuality
- 9 individual acceleration and 19 deceleration stages
- Temperature adjustable from -20 to +40 °C with pre-cooling function
- Data reporting system (optional)

— FIELDS OF APPLICATION

- Hospitals
- Blood banks and transfusion medicine laboratories
- Cell culture laboratories



Documentation system for blood banks.
More information on [page 162](#)



More information about the control panel
can be found on [page 202](#)



TECHNICAL DATA

ROTO SILENTA 630 RS ^{>)} refrigerated

| | |
|--|-------------------------------------|
| voltage ^{*)} | 400 V 3 ~ + N |
| frequency | 50 – 60 Hz |
| consumption | 9,700 VA |
| emission, immunity | EN/IEC 61326-1, class B |
| max. capacity | 6 x 2,000 ml |
| max. RPM | 6,000 min ⁻¹ |
| max. RCF | 6,520 |
| running time | 1 – 999 min: 59 s, ∞ continuous run |
| dimensions (WxDxH) | 813 x 1,015 x 973 mm |
| weight | approx. 355 kg |
| temperature control, infinitely variable | from -20 to +40 °C |
| Cat. No. | 5005 |

208 – 220 V +6 / -10 % 3- (+N) + PE,
with internal transformer

consumption

weight

5005-08

9,000 VA



approx. 401 kg

^{*)} Other voltages on request.


^{>)} Other models models on request.

AVAILABLE ROTORS

SWING-OUT ROTORS



| | | angle | max. RPM | max. capacity | Cat. No. | page |
|---|--------------------------|-------|-------------------------|---------------|-------------|------|
|  | swing-out rotor, 6-place | 90° | 4,500 min ⁻¹ | 6 x 2,000 ml | 4176 | 152 |
|  | swing-out rotor, 4-place | 90° | 4,500 min ⁻¹ | 4 x 2,000 ml | 4174 | 152 |

ANGLE ROTORS

| | | | | | | |
|---|----------------------|-----|-------------------------|------------|-------------|-----|
|  | angle rotor, 6-place | 25° | 6,000 min ⁻¹ | 6 x 250 ml | 4570 | 158 |
|---|----------------------|-----|-------------------------|------------|-------------|-----|

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



| | | | |
|---|---|-----------------|--|
| Rotor |  | Bucket |  |
| max. RPM | 4,500 min ⁻¹ | Cat. No. | 4524-A |
| max. RCF Rotor 4176 / 4174 | 6,498 / 5,683 | | |
| max. capacity | 12 / 8 blood bag | | |
| run-up run-down, braked in sec | 125 197 | | |
| angle temperature in °C ¹⁾ | 90° +16 / +10 | | |
| Cat. No. | 4176 / 4174 | | |



Blood bag

| | | | |
|--|---------------|---------------|---------------|
| capacity in ml | 500 | 500 | 750 |
| blood bag per system | 4-place | 4-place | 1-place |
| max. RCF ⁽²⁶⁾ Rotor 4176 / 4174 | 6,498 / 5,683 | 6,498 / 5,683 | 6,498 / 5,683 |
| radius in mm | 287 / 251 | 287 / 251 | 287 / 251 |
| Cat. No. | - | - | - |



Insert

| | | | |
|-----------------------------|--------------------------------------|---------------|---------------|
| boring Ø x L in mm | - | - | - |
| blood bag systems per rotor | 12 / 8 | 12 / 8 | 12 / 8 |
| Cat. No. | 4529²⁰⁰-AO,-AM,-AU | 4592-B | 4592-B |

+

Additional blood bank accessories can be found on [page 185](#)

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



| Rotor | | | Bucket | |
|---|-------------------|-------------------------|----------|--------|
| max. RPM | | 4,500 min ⁻¹ | Cat. No. | 4546-A |
| max. RCF | Rotor 4176 / 4174 | 6,271 / 5,479 | | |
| max. capacity | | 12 / 8 blood bag | | |
| run-up run-down, braked in sec | | 125 197 | | |
| angle temperature in °C ¹⁾ | | 90° +10 / 0 | | |
| Cat. No. | | 4176 / 4174 | | |



Blood bag

| | |
|----------------------------|---------------|
| capacity in ml | 450 |
| blood bag per system | 4-place |
| max. RCF Rotor 4176 / 4174 | 6,271 / 5,479 |
| radius in mm | 277 / 242 |
| Cat. No. | - |



Insert



| | |
|-----------------------------|---------------|
| boring Ø x L in mm | - |
| blood bag systems per rotor | 12 / 8 |
| Cat. No. | 4559-A |


+




Additional blood bank accessories can be found on [page 185](#)




- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 26) Includes blood bag hanging to prevent erythrocyte accumulation at low speeds. Different hanging heights allow customer-specific adjustments. (4529-AO top, 4529-AM center, 4529-AU bottom). Hanging blood bags may be centrifuged with a maximum RCF of 1,000.

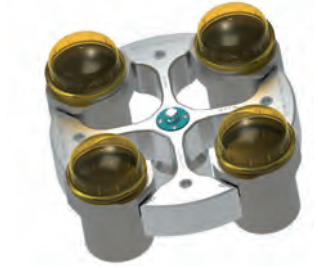— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174

| | | | |
|---|---|-----------------|--|
| Rotor |  | Bucket |  |
| max. RPM | 4,500 min ⁻¹ | Cat. No. | 4591-A |
| max. RCF Rotor 4176 / 4174 | 6,498 / 5,705 | | |
| max. capacity | 12 / 8 blood bag | | |
| run-up run-down, braked in sec | 125 197 | | |
| angle temperature in °C ¹⁾ | 90° +16 / +10 | | |
| Cat. No. | 4176 / 4174 | | |





| | | | |
|----------------------------|---|---|---|
| Blood bags |  |  |  |
| capacity in ml | 450 | 500 | 750 |
| blood bag per system | 3-place | 4-place | 1-place |
| max. RCF Rotor 4176 / 4174 | 6,271 / 5,705 | 6,498 / 5,705 | 6,498 / 5,705 |
| radius in mm | 287 / 252 | 287 / 251 | 287 / 251 |
| Cat. No. | - | - | - |


| | | | |
|-----------------------------|---|---|---|
| Insert |  |  |  |
| boring Ø x L in mm | - | - | - |
| blood bag systems per rotor | 12 / 8 | 12 / 8 | 12 / 8 |
| Cat. No. | 4598-A | 4592-B | 4592-B |


+ Additional blood bank accessories can be found on [page 185](#)

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174

| | | | |
|---|---|-----------------|--|
| Rotor |  | Bucket |  |
| max. RPM | 3,500 min ⁻¹ | Cat. No. | 4595-C ³¹⁾ |
| max. RCF Rotor 4176 / 4174 | 3,848 / 3,328 | | |
| max. capacity | 6 x 2,000 ml | | |
| angle temperature in °C ¹⁾ | 90° +16 / -12 | | |
| Cat. No. | 4176 / 4174 | | |





| | | |
|----------------------------|---|---------------------|
| Vessels |  | |
| capacity in ml | max. 1,600 ³⁵⁾ | 2,000 |
| W x D x H in mm | - | 150 x 100 x 180 |
| max. RCF Rotor 4176 / 4174 | 3,821 / 3,328 | 3,848 / - |
| radius in mm | 279 / 243 | 281 / - |
| run-up, in sec | 95 / 131 | 95 / - |
| run-down, braked in sec | 131 / 131 | 41 / - |
| Cat. No. | - | 0550 ²⁴⁾ |

| | | |
|-------------------|---|-------|
| Insert |  | |
| W x D x H in mm | 145 x 91 x 146 | - |
| vessels per rotor | 6 / 4 | 6 / - |
| Cat. No. | 4596-A | - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.
- 31) Adapter for accommodating sample tubes and blood collection tubes in carrier 4595-C on request.
- 35) Depending on the sample.

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



| | | | |
|---|---|-----------------|--|
| Rotor |  | Bucket |  |
| max. RPM | 4,500 min ⁻¹ | Cat. No. | 4523-A |
| max. RCF Rotor 4176 / 4174 | 6,520 / 5,705 | | |
| max. capacity | 6 / 4 blood bag | | |
| run-up run-down, braked in sec | 125 197 | | |
| angle temperature in °C ¹⁾ | 90° +9 / +3 | | |
| Cat. No. | 4176 / 4174 | | |





Blood bags



| | | | |
|----------------------------|---------------|---------------|---------------|
| capacity in ml | 500 | 750 | 1,000 |
| blood bag per system | 4-place | 1-place | 1-place |
| max. RCF Rotor 4176 / 4174 | 6,475 / 5,660 | 6,475 / 5,660 | 6,520 / 5,705 |
| radius in mm | 285 / 250 | 285 / 250 | 288 / 252 |
| Cat. No. | - | - | - |




| Insert |  |  |  |
|-----------------------------|---|---|---|
| boring Ø x L in mm | - | - | - |
| blood bag systems per rotor | 6 / 4 | 6 / 4 | 6 / 4 |
| Cat. No. | 4516-A | 4516-A | - |


+

Additional blood bank accessories can be found on [page 185](#)

— SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



| Rotor | | Bucket | |
|---|-------------------------|-----------------|---------------|
| max. RPM | 4,500 min ⁻¹ | lid | 5621 |
| max. RCF | 6,316 / 5,524 | Cat. No. | 4547-B |
| max. capacity | 6 / 4 blood bag | | |
| run-up run-down, braked in sec | 125 197 | | |
| angle temperature in °C ¹⁾ | 90° +9 / -9 | | |
| Cat. No. | 4176 / 4174 | | |

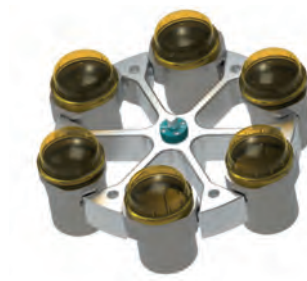



Blood bags



| | | |
|----------------------------|---------------|---------------|
| capacity in ml | 500 | 450 |
| blood bag per system | 4-place | 3-place |
| max. RCF Rotor 4176 / 4174 | 6,316 / 5,524 | 6,316 / 5,524 |
| radius in mm | 279 / 244 | 279 / 244 |
| Cat. No. | - | - |



| | | |
|-----------------------------|---|---|
| Insert |  |  |
| boring Ø x L in mm | - | - |
| blood bag systems per rotor | 6 / 4 | 6 / 4 |
| Cat. No. | 4548 | 4548 |

+

Additional blood bank accessories can be found on [page 185](#)

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174

| | | | |
|---|---------------------------------|-----------------------|---------------|
| | | | |
| Rotor | | Bucket | |
| max. RPM | 4,500 min ⁻¹ | adapter including lid | 4255 |
| max. RCF | Rotor 4176 / 4174 6,294 / 5,501 | Cat. No. | 4579-A |
| max. capacity | 6/4 x 1,000 ml | | |
| run-up run-down, braked in sec | 125 197 | | |
| angle temperature in °C ¹⁾ | 90° +4 / -11 | | |
| Cat. No. | 4176 / 4174 | | |

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Vessels | | | | | | | | | | | | | | | |
| capacity in ml | 5 | 7 | 9 | 15 | 25 | 50 | 100 | 2.6-3.4 | 2.7-3 | 4-5.5 | 4.5-5 | 4.9 | 9-10 | 10 | 1.6-5 |
| Ø x L in mm | 12x75 | 12x100 | 14x100 | 17x100 | 24x100 | 34x100 | 44x100 | 13 x 65 | 11x66 | 15x75 | 11x92 | 13x90 | 16x92 | 15x102 | 13x75 |
| max. RCF ²⁾ | Rotor 4176 / 4174 5,750 / 4,935 | 5,750 / 4,935 | 5,886 / 5,094 | 5,886 / 5,094 | 5,615 / 4,845 | 5,705 / 4,890 | 5,683 / 4,867 | 5,750 / 4,935 | 5,750 / 4,935 | 5,886 / 5,094 | 5,750 / 4,935 | 5,750 / 4,935 | 5,886 / 5,094 | 5,886 / 5,094 | 5,750 / 4,935 |
| radius in mm | 254 / 218 | 254 / 218 | 260 / 225 | 260 / 225 | 248 / 214 | 252 / 216 | 251 / 215 | 254 / 218 | 254 / 218 | 260 / 225 | 254 / 218 | 254 / 218 | 260 / 225 | 260 / 225 | 254 / 218 |
| Cat. No. | tubes ²⁾ | | | | | | | blood collection / urine tubes | | | | | | | |

| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Adapter | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 13 x 58 | 13 x 58 | 17.5 x 60 | 17.5 x 60 | 26 x 72 | 36 x 79 | 45 x 78 | 13.5 x 58 | 13 x 58 | 17.5 x 60 | 13 x 58 | 13.5 x 58 | 17.5 x 60 | 17.5 x 60 | 13.5 x 58 |
| vessels per rotor | 180 / 120 | 180 / 120 | 114 / 76 | 114 / 76 | 42 / 28 | 24 / 16 | 12 / 8 | 126 / 84 | 180 / 120 | 114 / 76 | 180 / 120 | 126 / 84 | 114 / 76 | 114 / 76 | 126 / 84 |
| Cat. No. | 4433 | 4433 | 4434 | 4434 | 4438 | 4439 | 4442 | 4435 | 4433 | 4434 | 4433 | 4435 | 4434 | 4434 | 4435 |

| | | | | | | | | | | | | | | | |
|------------------------|---------------------------------------|---------------|---------------|-----------------------------|---------------|---------------|---------------|----------------------------|-------------------------|----------------------------|----------------------------|----------------------------|---------------|---------------|---------------|
| Vessels | | | | | | | | | | | | | | | |
| capacity in ml | 4-7 | 4-7 | 8.5-10 | 15 | 50 | 25 | 30 | 10 | 250 | 290 | 650 | 750 | 1,000 | 1,000 | 175 |
| Ø x L in mm | 13x100 | 16x75 | 16x100 | 17x120 | 29x115 | 25x90 | 25 x 110 | 16 x 80 | 61 x 122 | 62 x 137 | 97 x 139 | 97 x 152 | 96 x 176 | 98 x 138 | 61 x 118 |
| max. RCF ²⁾ | Rotor 4176 / 4174 5,750 / 4,935 | 5,886 / 5,094 | 5,886 / 5,094 | 6,022 / 5,207 | 5,999 / 5,207 | 5,818 / 5,026 | 5,818 / 5,026 | 5,886 / 5,094 | 6,113 / 5,320 | 6,113 / 5,320 | 5,999 / 5,184 | 6,294 / 5,501 | 6,294 / 5,501 | 6,294 / 5,501 | 6,294 / 5,501 |
| radius in mm | 254 / 218 | 260 / 225 | 260 / 225 | 266 / 230 | 265 / 230 | 257 / 222 | 257 / 222 | 260 / 225 | 270 / 235 | 270 / 235 | 265 / 229 | 278 / 243 | 278 / 243 | 278 / 243 | 278 / 243 |
| Cat. No. | blood collection / urine tubes | | | tubes with screw cap | | | | 5127 ²⁴⁾ | - ²⁴⁾ | 0554 ²⁴⁾ | 0512 ²⁴⁾ | 4239 ²⁴⁾ | 4255 | Falcon | |


| | | | | | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|----------|----------|----------|-------------|
| Adapter | | | | | | | | | | | | | | | |
| boring Ø x L in mm | 13.5 x 58 | 17.5 x 60 | 17.5 x 60 | 17 x 86 | 30 x 87 | 26 x 72 | 26 x 72 | 17.5 x 60 | 62 x 92 | 62 x 92 | 98 x 138 | 98 x 138 | 98 x 138 | - | 61 x 118 |
| vessels per rotor | 126 / 84 | 114 / 76 | 114 / 76 | 72 / 48 | 30 / 20 | 42 / 28 | 42 / 28 | 114 / 76 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 |
| Cat. No. | 4435 | 4434 | 4434 | 4437 | 4441 | 4438 | 4438 | 4434 | 4443 | 4443 | 4258 | - | - | - | 4440 |

| | | | | | |
|------------------------|---------------------------------|---------------|----------------|----------------|----------------|
| Vessels | | | | | |
| capacity in ml | 175 | 200 | 225 | 250 | 500 |
| Ø x L in mm | 61.5x144 | 60 x 130 | 61 x 137 | 60 x 162 | 96 x 147 |
| max. RCF ²⁾ | Rotor 4176 / 4174 6,294 / 5,501 | 6,294 / 5,501 | 6,294 / 5,501 | 6,294 / 5,501 | 6,294 / 5,501 |
| radius in mm | 278 / 243 | 278 / 243 | 278 / 243 | 278 / 243 | 278 / 243 |
| Cat. No. | Nalgene® | Nunc® | Falcon® | Coming® | Coming® |

| | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|
| Adapter | | | | | |
| boring Ø x L in mm | - | - | - | - | - |
| vessels per rotor | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 |
| Cat. No. | 4430 | 4430 | 4440 | 4430 | 4449 |


- For cooled versions: Lowest temperature achievable with precooling and max. speed.
- Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- When using these tubes, carrier 4255 cannot be closed with its lid.
- At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.









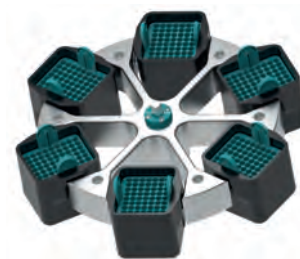






SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174
















| | |
|---|---|
| Rotor |  |
| max. RPM | 4,500 min ⁻¹ |
| max. RCF Rotor 4176 / 4174 | 5,999 / 5,184 |
| max. capacity | 6 x 750 ml |
| run-up run-down, braked in sec | 125 197 |
| angle temperature in °C ¹⁾ | 90° +14 / -1 |
| Cat. No. | 4176 / 4174 |

































| | |
|-----------------|--|
| Bucket |  |
| Cat. No. | 4522-A |











| | | | | | | | | | | | | | | | |
|----------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| capacity in ml | 4 | 5 | 6 | 7 | 12 | 15 | 25 | 50 | 100 | 2.6-3.4 | 2.7-3 | 4-5.5 | 4.5-5 | 7.5-8.5 | 9-10 |
| Ø x L in mm | 10x88 | 12x75 | 12x82 | 12x100 | 16x101 | 17x100 | 24x100 | 34x100 | 44x115 | 13x65 | 11x66 | 15x75 | 11x92 | 15x92 | 16x92 |
| max. RCF Rotor 4176 / 4174 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 |
| radius in mm | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 |
| Cat. No. | tubes²⁾ | | | | | | | | | blood collection / urine tubes | | | | | |

| | | | | | | | | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Adapter |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | 11 x 70 | 12.5 x 32 | 12.5 x 70 | 12.5 x 70 | 16 x 70 | 17.5 x 70 | 26 x 70 | 35 x 70 | 41.5 x 70 | 13.2 x 32 | 12.5 x 32 | 17.5 x 32 | 12.5 x 70 | 17.5 x 70 | 17.5 x 70 |
| vessels per rotor | 378 / 252 | 288 / 192 | 288 / 192 | 288 / 192 | 150 / 100 | 180 / 120 | 66 / 44 | 36 / 24 | 24 / 16 | 180 / 120 | 288 / 192 | 180 / 120 | 288 / 192 | 180 / 120 | 96 / 64 |
| Cat. No. | 4224 | 4213-93 | 4213 | 4213 | 4223 | 4214 | 4215 | 4216 | 4218 | 4222-93 | 4213-93 | 4214-93 | 4213 | 4214 | 4220 |

| | | | | | | | | | | | | | | | |
|----------------------------|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|
| Vessels |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| capacity in ml | 10 | 1.6-5 | 4-7 | 4-7 | 8 | 8.5-10 | 15 | 50 | 12 | 30 | 50 | 250 | 290 | 600 | 650 |
| Ø x L in mm | 15x102 | 13x75 | 16x75 | 13x100 | 16x125 | 16x100 | 17x120 | 29x115 | 17x100 | 25x110 | 29x115 | 61x122 | 62x137 | 93x134 | 97x139 |
| max. RCF Rotor 4176 / 4174 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,818 / 5,003 | 5,999 / 5,184 | 5,999 / 5,184 | 5,818 / 5,003 | 5,818 / 5,003 | 5,909 / 5,094 | 5,818 / 5,003 | 5,818 / 5,003 | 5,999 / 5,184 | 5,999 / 5,184 |
| radius in mm | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 257 / 221 | 265 / 229 | 265 / 229 | 257 / 221 | 257 / 221 | 261 / 225 | 257 / 221 | 257 / 221 | 265 / 229 | 265 / 229 |
| Cat. No. | blood collection / urine tubes | | | | | | tubes with screw cap | | | | | 5127²⁴⁾ | -²⁴⁾ | 0551²⁴⁾ | 0554²⁴⁾ |


| | | | | | | | | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Adapter |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| boring Ø x L in mm | 17.5x70 | 13.2x32 | 17.5x32 | 13.2x70 | 16x70 | 17.5x70 | 17x70 | 30x70 | 17.5x70 | 26x70 | 30x96 | 62x90 | 62x90 | 94x105 | 97.5x105 |
| vessels per rotor | 180 / 120 | 180 / 120 | 180 / 120 | 180 / 120 | 150 / 100 | 180 / 120 | 138 / 92 | 48 / 32 | 96 / 64 | 66 / 44 | 36 / 24 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 |
| Cat. No. | 4214 | 4222-93 | 4214-93 | 4222 | 4223 | 4214 | 4232 | 4245-A | 4220 | 4215 | 4249 | 4238 | 4238 | 4233 | 4258 |

| | | | | |
|----------------------------|---|---|---|---|
| Vessels |  |  |  |  |
| capacity in ml | 750 | 750 | 250 | 500 |
| Ø x L in mm | 97 x 152 | 96 x 135 | 60 x 162 | 96 x 147 |
| max. RCF Rotor 4176 / 4174 | 5,999 / 5,184 | 5,999 / 5,184 | 5,818 / 5,003 | 5,999 / 5,184 |
| radius in mm | 265 / 229 | 265 / 229 | 257 / 221 | 265 / 229 |
| Cat. No. | 0512²⁴⁾ | 4234-A | Corning® | Corning® |

| | | | | |
|--------------------|---|---|---|---|
| Adapter |  |  |  |  |
| boring Ø x L in mm | 97.5x105 | 97.5x105 | 60x125 | 97.5x105 |
| vessels per rotor | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 |
| Cat. No. | 4258 | 4258 | 6322 | 4258 |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174



Rotor

| | |
|---|------------------------------------|
| max. RPM | 4,500 min ⁻¹ |
| max. RCF | Rotor 4176 / 4174 6,384 / 5,592 |
| max. capacity | 6 x 1,000 ml |
| run-up run-down, braked in sec | 125 197 |
| angle temperature in °C ¹⁾ | 90° +9 / -9 |
| Cat. No. | 4176 / 4174 |

Bucket

| | |
|----------|--------|
| lid | 5621 |
| Cat. No. | 4547-B |

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|---------------------|---------------|---------------|---------------|---------------|---------------|---------------|--------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| capacity in ml | 5 | 7 | 9 | 15 | 25 | 50 | 100 | 2.6-3.4 | 2.7-3 | 4-5.5 | 4.5-5 | 4.9 | 7.5-8.2 | 9-10 | 10 |
| Ø x L in mm | 12x75 | 12x100 | 14x100 | 17x100 | 24x100 | 34x100 | 44x100 | 13x65 | 11x66 | 15x75 | 11x92 | 13x90 | 15x92 | 16x92 | 15x102 |
| max. RCF ²⁾ | 5,841 / 5,026 | 5,841 / 5,026 | 5,977 / 5,184 | 5,977 / 5,184 | 5,728 / 4,913 | 5,773 / 4,981 | 5,750 / 4,958 | 5,841 / 5,026 | 5,841 / 5,026 | 5,977 / 5,184 | 5,841 / 5,026 | 5,841 / 5,026 | 5,977 / 5,184 | 5,977 / 5,184 | 5,977 / 5,184 |
| radius in mm | 258 / 222 | 258 / 222 | 264 / 229 | 264 / 229 | 253 / 217 | 255 / 220 | 254 / 219 | 258 / 222 | 258 / 222 | 264 / 229 | 258 / 222 | 258 / 222 | 264 / 229 | 264 / 229 | 264 / 229 |
| Cat. No. | tubes ²⁾ | | | | | | | blood collection / urine tubes | | | | | | | |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-----------|-----------|-----------|-----------|---------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| boring Ø x L in mm | 13 x 58 | 13 x 58 | 17,5 x 60 | 17,5 x 60 | 26 x 72 | 36 x 79 | 45 x 78 | 13,5 x 58 | 13 x 58 | 17,5 x 60 | 13 x 58 | 13,5 x 58 | 17,5 x 60 | 17,5 x 60 | 17,5 x 60 |
| vessels per rotor | 180 / 120 | 180 / 120 | 114 / 76 | 114 / 76 | 42 / 28 | 24 / 16 | 12 / 8 | 126 / 84 | 180 / 120 | 114 / 76 | 180 / 120 | 126 / 84 | 114 / 76 | 114 / 76 | 114 / 76 |
| Cat. No. | 4433 | 4433 | 4434 | 4434 | 4438 | 4439 | 4442 | 4435 | 4433 | 4434 | 4433 | 4435 | 4434 | 4434 | 4434 |

Vessels

| | | | | | | | | | | | | | | | |
|------------------------|--------------------------------|---------------|---------------|---------------|----------------------|---------------|---------------|---------------|---------------|---------------|---------------------|------------------|---------------------|---------------------|---------------------|
| capacity in ml | 1.6-5 | 4-7 | 4-7 | 8 | 8.5-10 | 15 | 50 | 25 | 30 | 10 | 250 | 290 | 650 | 750 | 1,000 |
| Ø x L in mm | 13x75 | 13x100 | 16x75 | 16x125 | 16x100 | 17x120 | 29x115 | 25x90 | 25x110 | 16x80 | 62x122 | 62x137 | 97x139 | 97x152 | 96x176 |
| max. RCF ²⁾ | 5,841 / 5,026 | 5,841 / 5,026 | 5,977 / 5,184 | 5,977 / 5,184 | 5,977 / 5,184 | 6,090 / 5,298 | 6,090 / 4,958 | 5,909 / 5,117 | 5,909 / 5,117 | 5,977 / 5,184 | 6,203 / 5,411 | 6,203 / 5,411 | 6,384 / 5,592 | 6,384 / 5,592 | 6,384 / 5,592 |
| radius in mm | 258 / 222 | 258 / 222 | 264 / 229 | 264 / 229 | 264 / 229 | 269 / 234 | 269 / 219 | 261 / 226 | 261 / 226 | 264 / 229 | 274 / 239 | 274 / 239 | 282 / 247 | 282 / 247 | 282 / 247 |
| Cat. No. | blood collection / urine tubes | | | | tubes with screw cap | | | | | | 5127 ²⁴⁾ | - ²⁴⁾ | 0554 ²⁴⁾ | 0512 ²⁴⁾ | 4239 ²⁴⁾ |



Adapter

| | | | | | | | | | | | | | | | |
|--------------------|-----------|-----------|-----------|-----------|-----------|---------|---------|---------|---------|-----------|-------|-------|----------|----------|----------|
| boring Ø x L in mm | 13,5 x 58 | 13,5 x 58 | 17,5 x 60 | 17,5 x 60 | 17,5 x 60 | 17 x 86 | 30 x 87 | 26 x 72 | 26 x 72 | 17,5 x 60 | 62x92 | 62x92 | 98 x 141 | 98 x 141 | 98 x 141 |
| vessels per rotor | 126 / 84 | 126 / 84 | 114 / 76 | 114 / 76 | 114 / 76 | 72 / 48 | 30 / 20 | 42 / 28 | 42 / 28 | 114 / 76 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 |
| Cat. No. | 4435 | 4435 | 4434 | 4434 | 4434 | 4437 | 4441 | 4438 | 4438 | 4434 | 4443 | 4443 | - | - | - |

Vessels

| | | | | | | |
|------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| capacity in ml | 175 | 175 | 200 | 225 | 250 | 500 |
| Ø x L in mm | 61x118 | 61,5x144,3 | 60x130 | 61x137 | 60x162 | 96x147 |
| max. RCF ²⁾ | 6,384 / 5,592 | 6,384 / 5,592 | 6,384 / 5,592 | 6,384 / 5,592 | 6,384 / 5,592 | 6,384 / 5,592 |
| radius in mm | 282 / 247 | 282 / 247 | 282 / 247 | 282 / 247 | 282 / 247 | 282 / 247 |
| Cat. No. | Falcon® | Nalgene® | Nunc® | Falcon® | Corning® | Corning® |





Adapter


| | | | | | | |
|--------------------|-------|-------|-------|-------|-------|-------|
| boring Ø x L in mm | - | - | - | - | - | - |
| vessels per rotor | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 | 6 / 4 |
| Cat. No. | 4440 | 4430 | 4430 | 4440 | 4430 | 4449 |


- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.17) When using these tubes, bucket 4547-B cannot be closed with lid 5621.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

SWING-OUT ROTOR, 6- / 4-PLACE | 4176 / 4174

| | | | | |
|---|--------------------|---|--|-------------|
|  | | + |  | |
| Rotor | | | Bucket | |
| max. RPM | | | Cat. No. | 4572 |
| max. RCF | Rotor 4176 / 4174 | | | |
| max. capacity | | | | |
| run-up run-down, braked in sec | | | | |
| angle temperature in °C ¹⁾ | | | | |
| Cat. No. | 4176 / 4174 | | | |



| | | | |
|-----------------|-------------------|---|---------------|
| Vessels | |  | |
| capacity in ml | | 4 – 7 | 4 – 7 |
| Ø x L in mm | | 13 x 75 | 13 x 100 |
| max. RCF | Rotor 4176 / 4174 | 5,818 / 5,003 | 5,818 / 5,003 |
| radius in mm | | 257 / 221 | 257 / 221 |
| Cat. No. | | blood collection tubes | |

| | | | |
|--------------------|--|---|-----------|
| Adapter | |  | |
| boring Ø x L in mm | | 13.2 x 59 | 13.2 x 59 |
| vessels per rotor | | 336 / 224 | 336 / 224 |
| Cat. No. | | 4493 | 4493 |

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

— ANGLE ROTOR, 6-PLACE | 4570



Rotor

| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 6,000 min ⁻¹ 5,594 |
| max. capacity | 6 x 250 ml |
| run-up run-down, braked in sec | 64 69 |
| angle max. noise level | 25° 54 dB(A) |
| temperature in °C ¹⁾ | -16 |
| Cat. No. | 4570 |

Lid bioseal[®] and phenol-resistant

Cat. No.



INCLUSIVE



Vessels

| | | | | | | | | | | | |
|------------------------|---------------------------|----------|----------|-----------------------------|----------|---------|---------|----------|----------|----------|---------------------------|
| | | | | | | | | | | | |
| capacity in ml | 15 | 25 | 94 | 15 | 50 | 10 | 30 | 50 | 85 | 94 | 250 |
| Ø x L in mm | 17 x 100 | 24 x 100 | 38 x 102 | 17 x 120 | 29 x 115 | 16 x 80 | 26 x 95 | 29 x 107 | 38 x 106 | 38 x 102 | 61.5 x 122 |
| max. RCF ²⁾ | 5,315 | 5,152 | 4,910 | 5,152 | 4,830 | 5,353 | 5,152 | 4,830 | 4,910 | 4,910 | 5,594 |
| radius in mm | 132 | 128 | 122 | 128 | 120 | 133 | 128 | 120 | 122 | 122 | 139 |
| Cat. No. | tubes²⁾ | | | tubes with screw cap | | | | | | | 5127²⁴⁾ |



Adapter

| | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|
| | | | | | | | | | | | |
| boring Ø x L in mm | 17.6 x 83 | 26 x 80 | 38.6 x 88 | 17 x 106 | 30 x 100 | 16.6 x 70 | 26 x 80 | 29 x 90 | 38.6 x 88 | 38.6 x 88 | 61.5 x 109 |
| vessels per rotor | 42 | 18 | 6 | 30 | 6 | 48 | 18 | 6 | 6 | 6 | 6 |
| Cat. No. | 5646 | 5642 | 5644 | 5637 | 5638 | 5641 | 5642 | 5643 | 5644 | 5644 | - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

HETTINFO II DOCUMENTATION SYSTEM

HettInfo II documents important work steps before and during centrifugation – this ensures transparency and traceable processes. The documentation system is operated via a touch display, which guides the user step by step through the centrifugation and records all significant process data.

All documented data points are temporarily stored locally and can be exported directly after the centrifugation or at a defined time as a CSV file. The data can be stored on the network or exported to a USB stick. This makes HettInfo II system independent and facilitates further processing into another software system.



— ADVANTAGES

- 1 **Touch display**
HettInfo II can be operated simply and easily via the touch display – even with laboratory gloves.
- 2 **Step-by-step instructions**
With the step-by-step instructions, the user always knows exactly what to do next. In the event of incorrect operation or errors, a visual and audible message is issued immediately.
- 3 **Automatic data export**
Data obtained can be exported after each run or in specific times.
- 4 **Universal data format**
The exported CSV file is easy to process and work independently for greater compatibility with an existing system.

— TECHNICAL FEATURES

| | |
|---------------------------------|---|
| Compatibility | ROTO SILENTA 630 RS, ROTIXA 500 RS |
| 4.3" touch display | Process status display, error messages, settings |
| User | max. 3,000 |
| Data logging Scan Module | User ID, blood bag ID, program number |
| Run data logging | Centrifuge names, centrifuge data, date, start and end time, temperature, radius, acceleration time, braking time, total running time, RPM, RCF, integral RCF, cycle time, brake deactivation speed, end result |
| File format | CSV |
| Ports | LAN, USB |
| Logbook | Documentation of error messages. Export as CSV file on USB stick possible. |

— MODULES

HETTINFO II

With HettInfo II you can record running data of your ROTO SILENTA 630 RS or ROTIXA 500 RS centrifuge. To record a complete centrifugation process, we recommend HettInfo II plus Scan Module.



| Articles | Includes |
|-----------------------------------|-------------------------|
| HettInfo II – ROTO SILENTA 630 RS | Firmware, touch display |
| HettInfo II – ROTIXA 500 RS | Firmware, touch display |

Cat. No

0955

0956

SCAN MODULE

The barcode scanner included in the Scan Module records all data reliably. The ergonomic holder ensures easy handling and offers secure protection when not in use.

Barcode scanners from the HettInfo I series are compatible with HettInfo II and can still be used.



| Articles | Includes |
|-----------------------------------|--|
| Scan Module – ROTO SILENTA 630 RS | Barcode scanner, bracket, cable clamps |
| Scan Module – ROTIXA 500 RS | Barcode scanner, bracket, cable clamps |

Cat. No

0959

0960

ADD-ON KIT

| Articles | Includes |
|------------------------------|--------------------------------------|
| Add-on Kit for model 5005 | Firmware, touch display, front panel |
| Add-on Kit for model 5005-80 | Firmware, touch display, front panel |
| Add-on Kit for model 5005-90 | Firmware, touch display, front panel |
| Add-on Kit for model 4950 | Firmware, touch display, front panel |

Cat. No

E4378

E4393

E4416

E4409

With the Add-on Kit, ROTO SILENTA 630 RS models from model year 01/2008* can be upgraded to HettInfo II. To capture a complete centrifugation process, we recommend the Add-on Kit plus Scan Module.

* Older models on request.

PRODUCT VIDEOS


Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



CELL WASHER

Automated cell washing centrifuge

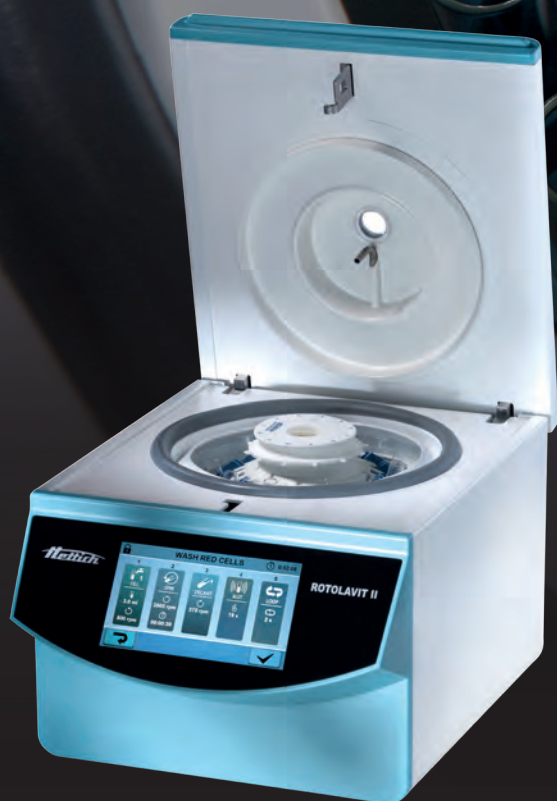

ROTOLAVIT II
on page 166



05

ROTOLAVIT II

User friendly serology solutions

The ROTOLAVIT II cell washing system facilitates routine tasks in transfusion laboratories. It was developed for cross-matching, as well as antibody search and differentiation, and for cell washing in TB tests. Its modern touch screen enables the simple and rapid input of up to 20 different programs. The centrifuge has a small footprint and delivers reliable results without the need for costly consumables.

— FEATURES

- Max. RPM: 3,500 min⁻¹
- Max. RCF: 1,438
- Max. capacity: 24 standard tubes
- Automatic cell washing system for serological testing
- Choice of 2 rotors 12-place or 24-place
- IVDR-conform according to regulation (EU) 2017/746
- Maximum noise level of ≤ 49 dB (A)
- Easy operation with intuitiv touch screen
- 24 program memories for more individuality
- 7 pre-installed application programs

— FIELDS OF APPLICATION

- Hospitals
- Hematological laboratories
- Blood centers
- Clinical laboratories



according to regulation (EU) 2017/746

TECHNICAL DATA

| ROTOLAVIT II | |
|----------------------|---|
| voltage | 100 – 240 V 1 ~ |
| frequency | 50 – 60 Hz |
| consumption | 144 VA |
| emission, immunity | EN/IEC 61326-3-2 / FCC CFR47 part 15, ed 2015-04-21 (e-CFR) class B |
| max. capacity | 24 standard tubes (10 x 75 mm or 12 x 75 mm) |
| max. RPM | 3,500 min ⁻¹ |
| max. RCF | 1,438 |
| radius (both rotors) | 105 mm |
| dimensions (HxWxD) | 330x480x280 mm |
| weight | approx. 24.5 kg |
| max. noise level | ≤ 49 dB (A) |
| Cat. No. | 1008-00 |

The ROTOLAVIT II is not available in all countries.

AVAILABLE ROTORS

| SWING-OUT ROTORS | | angle | max. RPM | max. capacity | Cat. No | page |
|---|---------------------------|-------|-----------|--|---------------|------|
|  | swing-out rotor, 12-place | 45° | 3,500 min | 12 x (10x75 mm* or 12x75 mm) * Tubes requires adapter No. 1019 | 1017-A | 168 |
| | swing-out rotor, 24-place | 45° | 3,500 min | 24 x (10x75 mm* or 12x75 mm) * Tubes requires adapter No. 1019 | 1018-A | 168 |



— SWING-OUT ROTOR, 12-PLACE | 1017-A





Rotor

| | |
|--------------------------|---------------------------------|
| max. RPM max. RCF | 3,500 min ⁻¹ 1,438 |
| max. capacity | 12 x 5 ml |
| angle max. noise level | 45° 49 dB (A) |
| Cat. No. | 1017-A |



Vessels

| | | |
|------------------------|---|---|
| |  |  |
| capacity in ml | 3 | 5 |
| Ø x L in mm | 10 x 75 | 12 x 75 |
| max. RCF ²⁾ | 1,438 | 1,438 |
| radius in mm | 105 | 105 |
| Cat. No. | tubes²⁾ | |



Adapter

| | | |
|--------------------|-----------------------|----------|
| boring Ø x L in mm | - | - |
| vessels per rotor | 12 | 12 |
| Cat. No. | 1019 (12 pcs.) | - |

— SWING-OUT ROTOR, 24-PLACE | 1018-A





Rotor

| | |
|--------------------------|---------------------------------|
| max. RPM max. RCF | 3,500 min ⁻¹ 1,438 |
| max. capacity | 24 x 5 ml |
| angle max. noise level | 45° 49 dB (A) |
| Cat. No. | 1018-A |



Vessels

| | | |
|------------------------|---|---|
| |  |  |
| capacity in ml | 3 | 5 |
| Ø x L in mm | 10 x 75 | 12 x 75 |
| max. RCF ²⁾ | 1,438 | 1,438 |
| radius in mm | 105 | 105 |
| Cat. No. | tubes²⁾ | |



Adapter

| | | |
|--------------------|-----------------------|----------|
| boring Ø x L in mm | - | - |
| vessels per rotor | 24 | 24 |
| Cat. No. | 1019 (12 pcs.) | - |

2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.



DUAL CENTRIFUGE

Homogenizing, mixing and
milling – fast and efficient



ZENTRIMIX 380 R
on page 172

A close-up photograph of a person's hands, wearing blue nitrile gloves, loading a dual rotor centrifuge. The person is placing several clear microcentrifuge tubes into the slots of a black rotor. The rotor is mounted on a larger black base. The background is dark and out of focus. A large, semi-transparent white horizontal bar is positioned across the upper portion of the image, containing the number '06' in a large, bold, dark font.

06

ZENTRIMIX 380 R

Efficient and safe work in the laboratory

The dual centrifuge ZentriMix 380 R allows many challenging laboratory tasks in research, development and analytics in a very efficient way or makes them possible for the first time. Examples are the rapid mixing of viscous materials, the production of nanoparticles in closed (sterile) vessels or tissue disruption. A particular advantage is the powerful cooling system for temperature-sensitive samples.

The ZentriMix 380 R was developed on the basis of proven Hettich centrifuge technology. This makes the device safe, reliable and durable. In addition, the compact design and the low noise level ensure a comfortable working environment in the laboratory.

— FEATURES

- (Nano-) Milling of samples
- QuEChERS-Analysis in one step in 50-70 % less time
- Fast und homogeneous Mixing of highly viscous materials
- Usage of inexpensive standard-vials
- Eliminates cleaning time and effort vs. the standard mills or mixers
- Guarantees sterility of the sample (i.e. genetic analysis after Milling)
- Integrated cooling for sensitive samples
- Very wide volume bandwidth when mixing (2 ml to 250 ml)

— FIELDS OF APPLICATION

- Analytical laboratories
- Food control laboratories
- University / Academic research
- Pharmaceutical laboratories
- Forensic laboratories
- Environmental laboratories
- Cell culture laboratories
- Cosmetic laboratories



More information about the control panel
can be found on [page 202](#)




TECHNICAL DATA

ZentriMix 380 R


| | | |
|---|---------------------------------|--------------------------------|
| voltage ¹⁾ | 200 – 240 V 1 ~ | 110 – 127 V 1 ~ |
| frequency | 50 – 60 Hz | 60 Hz |
| consumption | 1,400 VA | 1,600 VA |
| emission, immunity | EN/IEC 61326-1, class B | FCC class B |
| max. capacity | 2 x 250 ml / 40 x 2.0 ml | 2 x 250 ml / 40 x 2.0 ml |
| max. RPM (S rotor / Swing-out rotor, 4-place) | 2,500 / 5,000 min ⁻¹ | 2,500 / 5,00 min ⁻¹ |
| max. RCF (S rotor / Swing-out rotor, 4-place) | 1,048 / 4,863 | 1,048 / 4,863 |
| dimensions (WxDxH) | 472 x 759 x 418 mm | 472 x 769 x 418 mm |
| weight | approx. 81.5 kg | approx. 89 kg |
| Cat. No. | 3200 | 3200-01 |

1) Other voltages on request.

AVAILABLE ROTORS

| ROTORS | angle | max. RPM | max. capacity | Cat. No. | page |
|--|-------|-------------------------|---------------|-------------|------|
|  H rotor, 2-place | 40° | 1,500 min ⁻¹ | 2 x 250 ml | 3206 | 174 |
|  S rotor, 2-place | 40° | 2,500 min ⁻¹ | 2 x 250 ml | 3205 | 174 |
|  Swing-out rotor, 4-place | 90° | 5,000 min ⁻¹ | 4 x 250 ml | 3234 | 175 |

OPERATING PRINCIPLE OF THE ROTOR

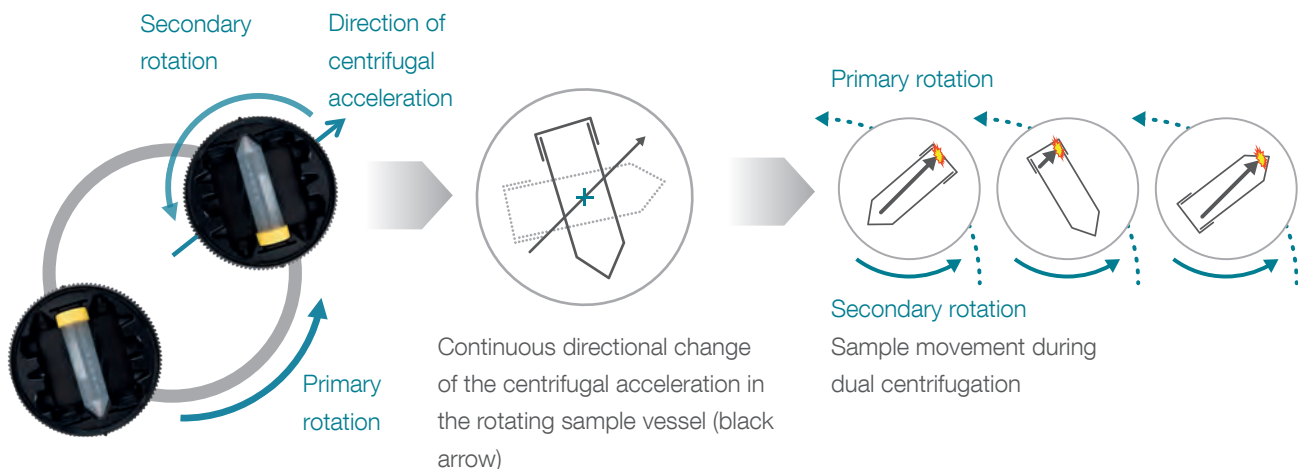

H ROTOR, 2-PLACE | 3206



Rotor

| | |
|---|-------------------------------|
| max. RPM max. RCF | 1,500 min ⁻¹ 377 |
| max. capacity | 2 x 250 ml |
| run-up run-down, braked in sec | 22 24 |
| angle temperature in °C ²⁾ | 40° +20 |
| Cat. No. | 3206 |

Vessels

| | | | | | | | |
|------------------------|-----------|-----------|----------|---------------------|-----------|---------|---------|
| | | | | | | | |
| capacity in ml | 2.0 | 10 | 15 | 50 | 125 | 185 | 250 |
| Ø x L in mm | 11 x 45.5 | 25.5 x 46 | 17 x 121 | 29.5 x 116 | 67 x 73,7 | 68 x 60 | 68 x 79 |
| max. RCF ²⁾ | 377 | 377 | 377 | 377 | 307 | 319 | 319 |
| radius in mm | 150 | 150 | 150 | 150 | 122 | 127 | 127 |
| Cat. No. | - | - | tubes | jars with screw cap | | | |



Adapter

| | | | | | | | |
|-------------------|-------------|-------------|-------------|-------------|---------------|---------------|---------------|
| vessels per rotor | 40 | 4 | 6 | 6 | 2 | 2 | 2 |
| Cat. No. | 3236 | 3211 | 3218 | 3218 | 3237-2 | 3221-A | 3221-A |



S-ROTOR, 2-PLACE | 3205



Rotor

| | |
|---|---------------------------------|
| max. RPM max. RCF | 2,500 min ⁻¹ 1,048 |
| max. capacity | 2 x 250 ml |
| run-up run-down, braked in sec | 35 35 |
| angle temperature in °C ²⁾ | 40° +20 |
| Cat. No. | 3205 |

Vessels

| | | | | | |
|------------------------|-----------|-----------|---------------------|---------|---------|
| | | | | | |
| capacity in ml | 2.0 | 10 | 125 | 185 | 250 |
| Ø x L in mm | 11 x 45.5 | 25.5 x 46 | 67 x 73,7 | 68 x 60 | 68 x 79 |
| max. RCF ²⁾ | 1,048 | 1,048 | 852 | 886 | 886 |
| radius in mm | 150 | 150 | 122 | 127 | 127 |
| Cat. No. | - | - | jars with screw cap | | |



Adapter

| | | | | | |
|-------------------|-------------|-------------|---------------|---------------|---------------|
| vessels per rotor | 4 | 4 | 2 | 2 | 2 |
| Cat. No. | 3236 | 3211 | 3237-2 | 3221-A | 3221-A |



Removal aid for Twist-Top disk 3236

3210

Removal aid for Twist-Top disk 3237-2 and 3221-A

3223

37) Conical 2 ml Sarstedt PP microtitre tubes with screw cap (Art.No. 72.693.005)

38.1) Please only use polypropylene vessels in accordance with ISO 8362 (No Glass!), to fit into the adapter the height of the vessel including crimp cap and stopper should be 48.5 mm.

39) All S Rotor adapters can also be used in the H Rotor.

41) Straight-walled 125 ml Thermo Fischer PPCO wide-neck jars with screw cap (Art.No. 2118-0004)



AUTOMATED CENTRIFUGES

We are the world leader in automated centrifuges

Since the introduction of the first robotically integrated centrifuges over 25 years ago, Hettich is still setting the benchmark in centrifuge automation technology.

We have successfully integrated in most of today's laboratory automation systems and are recognized globally for the quality, precision and safety of our units. We currently offer four different automationfriendly models – each designed for reliable performance in high-use automation settings.

07



MIKRO 220
ROBOTIC



SBS 300
ROBOTIC



ROTINA 380 | 380 R |
380 RC ROBOTIC



ROTANTA 460
ROBOTIC



AUTOMATED
CENTRIFUGES

More information about our automated centrifuges can be found on our website at www.hettichlab.com or on YouTube.



EQUIPMENT


The useful addition

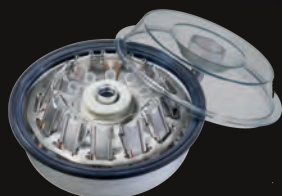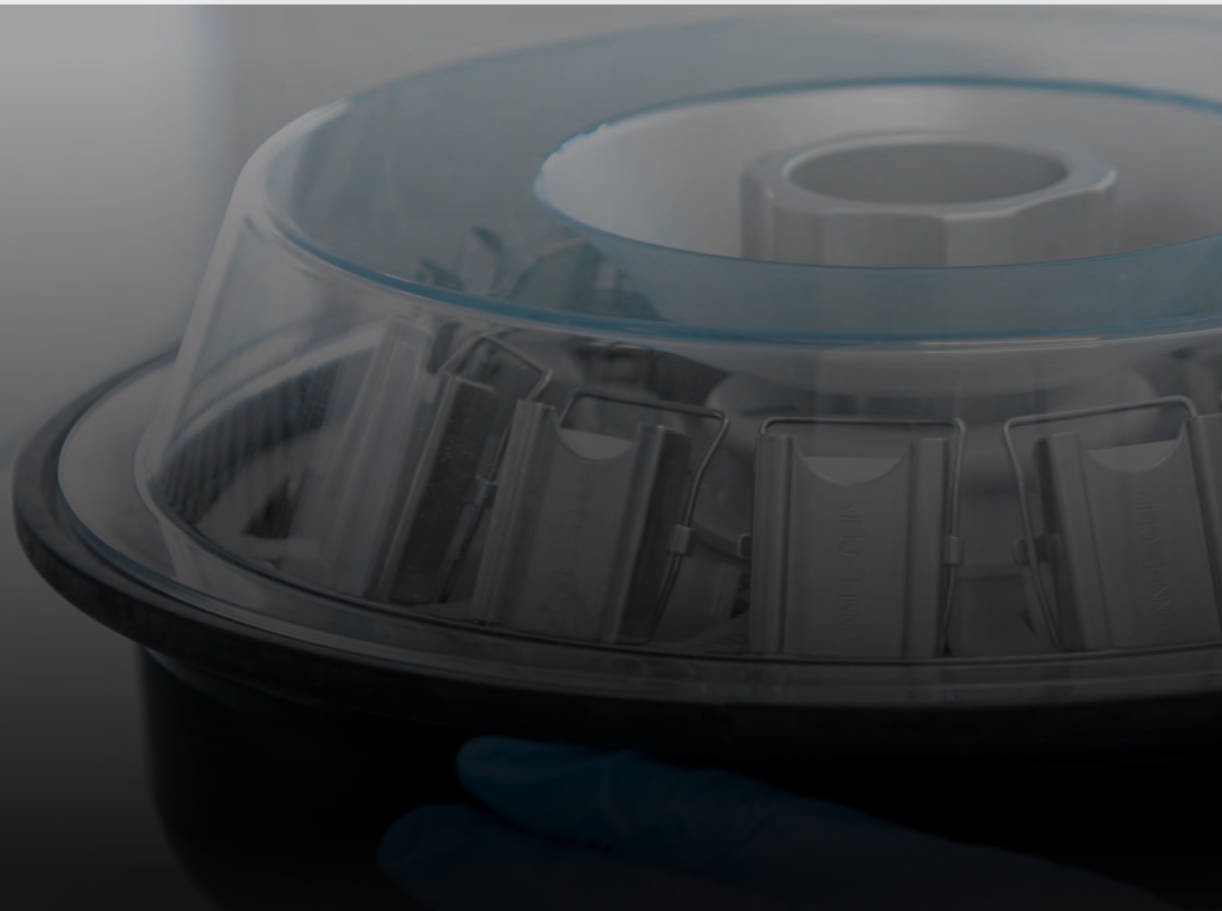

CYTO SYSTEM
on page 180



ROLLING CABINET
on page 185

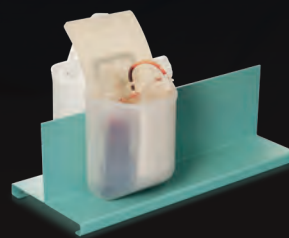

BLOOD BANK
ACCESSORIES
on page 185

A person wearing a white lab coat and blue gloves is working in a laboratory. They are holding a petri dish with a clear lid, which contains a grid of small, dark, rectangular objects. The background is slightly blurred, showing other laboratory equipment and a white surface. The overall lighting is soft and clinical.

08

HETTICH CYTO SYSTEM

Cytological preparations – safe and economic

Increased demands on security or flexibility as well as time and cost pressures represent a large challenge for today's cytology laboratory. Hettich's three cyto systems are available to tackle these challenges. Reliable, flexible and cost-saving solutions – all IVDR-conform according to regulation (EU) 2017/746.

SYSTEM 1

System 1 is particularly suitable for a high sample throughput thanks to its 12-place rotor. In addition, the autoclavable swing-out rotor with a TÜV certified, bioseal rotor lid provides maximum safety. This system can be used in two proven Hettich benchtop centrifuges, offers comprehensive accessories and is very easy to handle. The end results is an optimal cell presentation.


Compatible for models:

UNIVERSAL 320 / 320 R |
ROTOFIX 32 A

Benefits:

- Closed, autoclavable rotor with Bio-Seal lid
- 12-place swing-out rotor for maximum sample throughput
- Large selection of cytochambers for single and multiple use. Re-usable cytochambers are autoclavable
- Easy handling
- Good cell representation

SYSTEM 2

This system offers you the highest possible flexibility. On the one hand, volumes between 1 and 8 ml can be prepared while up to 8 cell sediments can fit on a single slide. In addition, this accessory can be used in many Hettich centrifuges, often without rotor replacement. This accessory is inexpensive and is characterized by a high, representative cell yield.


Compatible for models:

ROTOFIX 32 A | UNIVERSAL 320 /
320 R | ROTINA 380 / 380 R | ROTINA
420 / 420 R | ROTANTA 460 / 460 R |
ROTIXA 500 RS

Benefits:

- Large variety of accessories
- Flexible sample volumes
- Can be used with and without filter cards, depending on application and requirements.
- Very high cell yield

SYSTEM 3

System 3 combines the easy handling of System 1 with the flexibility and price advantage of System 2. It can operate in a variety of Hettich centrifuges and, like System 1, requires only a single centrifugation step to arrive at a dry cell pellet. The three different sediment size options give a distinct advantage.


Compatible for models:

ROTOFIX 32 A | ROTINA 420 / 420 R |
UNIVERSAL 320 / 320 R

Benefits:

- Easy handling
- Ideal for small sample volumes
- Can be used with and without filter cards, depending on application and requirements (dry or moist cell sediment).

Assembly of a complete cyto insert

SYSTEM 1

cyto chamber with filter card

Clips

swing-out rotor, 12-place

MOST POPULAR

SYSTEM 2

lid

ring

cyto chamber

Slide carrier with filter card

bucket

SYSTEM 3

lid

cyto chamber

Slide carrier with filter card and ring

bucket

SYSTEM 1 – rotor and accessories

— SWING-OUT ROTOR

Swing-out rotor, 12-place
For ROTOFIX 32 A | UNIVERSAL 320 / 320 R

| | |
|----------------------------------|-------------------------------|
| max. RPM max. RCF | 2,000 min ⁻¹ 438 |
| max. capacity | 12 cyto chambers |
| run-up run-down, braked in sec | 19 18 |
| Angle | 90° |
| Cat. No. | 1515-A |

+

Lid bioseal⁵⁾

| | |
|-----------------|------------------|
| Cat. No. | INCLUSIVE |
|-----------------|------------------|

Stand

| | |
|-----------------|-------------|
| Cat. No. | 1528 |
|-----------------|-------------|

— CYTO CHAMBERS

Cyto chambers (disposable)

| | | |
|-------------------------|---|-----------------------|
| | | |
| capacity in ml | 0.5 | 0.2 |
| area in mm ² | 28.3 | 28.3 |
| Ø in mm | 6 | 6 |
| Cat. No. | 1531 (50 pcs.) 1534 (500 pcs.) | 1532 (50 pcs.) |

+

Clips (autoclavable)

| | | |
|-----------------|----------------------|----------------------|
| | | |
| Cat. No. | 1524 (4 pcs.) | 1524 (4 pcs.) |

+

Filter cards

| | | |
|-----------------|--------------------------------------|--------------------------------------|
| | | |
| Cat. No. | filter card white (inclusive) | filter card brown (inclusive) |

Cyto chambers (re-usable, autoclavable)

| | | |
|---|-----------------------|-----------------------|
| | | |
| capacity in ml | 0.5 | 6 ¹⁸⁾ |
| area in mm ² / (L x W) in mm | 28.3 | 13.4 x 22 |
| Ø in mm | 6 | - |
| Cat. No. | 1538 (12 pcs.) | 1536 (12 pcs.) |

+

Clips (autoclavable)

| | | |
|-----------------|----------------------|----------------------|
| | | |
| Cat. No. | 1524 (4 pcs.) | 1524 (4 pcs.) |

+

Filter cards / seals

| | | |
|-----------------|------------------------|------------------------|
| | | |
| Cat. No. | 1539 (200 pcs.) | 1537 (100 pcs.) |

5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.

18) This is the maximum capacity. The recommended quantity to be used per chamber is 4 ml.

SYSTEM 2 – rotors and equipment

— SWING-OUT ROTOR

Swing-out rotor, 4-place For ROTOFIX 32 A | UNIVERSAL 320 / 320 R



| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,451 |
| max. capacity | 8 cyto chambers |
| run-up run-down, braked in sec | 22 25 |
| angle | 90° |
| Cat. No. | 1624 |



Bucket



| | |
|-----------------|-------------|
| lid | 1661 |
| Cat. No. | 1660 |



Swing-out rotor, 4-place For UNIVERSAL 320 / 320 R



| | |
|---|---------------------------------|
| max. RPM max. RCF | 5,000 min ⁻¹ 2,879 |
| max. capacity | 8 cyto chambers |
| run-up run-down, braked in sec | 30 32 |
| angle temperature in °C ¹⁾ | 90° -10 |
| Cat. No. | 1494 |



Bucket



| | |
|-----------------|-------------|
| Cat. No. | 1452 |
|-----------------|-------------|




Swing-out rotor, 4-place For ROTINA 380 / 380 R



| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,898 |
| max. capacity | 16 cyto chambers |
| run-up run-down, braked in sec | 24 17 |
| angle temperature in °C ¹⁾ | 90° -8 |
| Cat. No. | 1798 |



Bucket



| | |
|-----------------|-------------|
| lid | 5053 |
| Cat. No. | 5051 |

Adapter



| | |
|-----------------|-------------|
| Cat. No. | 5280 |
|-----------------|-------------|




Swing-out rotor, 4-place For ROTINA 420 / 420 R



| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,898 |
| max. capacity | 16 cyto chambers |
| run-up run-down, braked in sec | 18 16 |
| angle temperature in °C ¹⁾ | 90° -1 |
| Cat. No. | 4753 |



Bucket



| | |
|-----------------|-------------|
| lid | 5053 |
| Cat. No. | 5051 |

Adapter



| | |
|-----------------|-------------|
| Cat. No. | 5280 |
|-----------------|-------------|




Swing-out rotor, 4-place For ROTANTA 460 / 460 R / 460 RC / 460 RF



| | |
|----------------------------------|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 3,095 |
| max. capacity | 16 cyto chambers |
| run-up run-down, braked in sec | 40 45 |
| angle | 90° |
| Cat. No. | 5694 |



Bucket



| | |
|-----------------|-------------|
| lid | 5053 |
| Cat. No. | 5051 |

Adapter



| | |
|-----------------|-------------|
| Cat. No. | 5280 |
|-----------------|-------------|



Swing-out rotor, 4-place For ROTANTA 460 / 460 R / 460 RC / 460 RF

| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,600 min ⁻¹ 4,069 |
| max. capacity | 16 cyto chambers |
| run-up run-down, braked in sec | 75 88 |
| angle temperature in °C ¹⁾ | 90° +10 |
| Cat. No. | 5699-R |



Bucket

| | |
|----------|------|
| Cat. No. | 5628 |
|----------|------|




Adapter

| | |
|----------|--------|
| Cat. No. | 5220-A |
|----------|--------|



Adapter

| | |
|----------|------|
| Cat. No. | 5280 |
|----------|------|

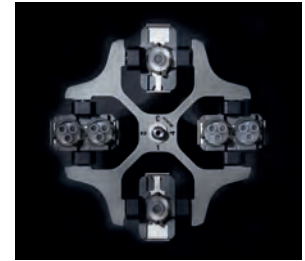

Swing-out rotor, 6-place For ROTOFIX 32 A | UNIVERSAL 320 / 320 R


| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,039 |
| max. capacity | 12 cyto chambers |
| run-up run-down, braked in sec | 22 25 |
| angle temperature in °C ¹⁾ | 90° |
| Cat. No. | 1626 |



Bucket

| | |
|-----|------|
| lid | 1661 |
|-----|------|

| | |
|-----------------|-------------|
| Cat. No. | 1660 |
|-----------------|-------------|



Swing-out rotor, 6-place Passend für ROTINA 380 / 380 R


| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 2,003 |
| max. capacity | 12 cyto chambers |
| run-up run-down, braked in sec | 19 18 |
| angle temperature in °C ¹⁾ | 90° -6 |
| Cat. No. | 1726 |



Bucket

| | |
|-----|------|
| lid | 1661 |
|-----|------|

| | |
|-----------------|-------------|
| Cat. No. | 1660 |
|-----------------|-------------|



Swing-out rotor, 6-place For ROTANTA 460 | 460 R | 460 RC | 460 RF


| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 3,291 |
| max. capacity | 24 cyto chambers |
| run-up run-down, braked in sec | 38 46 |
| angle temperature in °C ¹⁾ | 90° 0 |
| Cat. No. | 4446 |



Bucket

| | |
|-----|------|
| lid | 5053 |
|-----|------|

| | |
|-----------------|-------------|
| Cat. No. | 5051 |
|-----------------|-------------|



Adapter

| | |
|----------|------|
| Cat. No. | 5280 |
|----------|------|



Swing-out rotor, 6-place For ROTIXA 500 RS


| | |
|---|---------------------------------|
| max. RPM max. RCF | 4,000 min ⁻¹ 3,274 |
| max. capacity | 24 cyto chambers |
| run-up run-down, braked in sec | 33 50 |
| angle temperature in °C ¹⁾ | 90° 0 |
| Cat. No. | 4296 |



Bucket

| | |
|-----|------|
| lid | 5053 |
|-----|------|

| | |
|-----------------|-------------|
| Cat. No. | 5051 |
|-----------------|-------------|






























Adapter

| | |
|----------|------|
| Cat. No. | 5280 |
|----------|------|








CYTO CHAMBERS

| | | | | | | |
|---|---|---|---|---|--|---|
| |  |  |  |  |  |  |
| Cyto chambers | | | | | | |
| capacity in ml | 1 | 2 | 4 | 8 | 3 x 2 | 4 x 1 |
| area in mm ² | 30 | 60 | 120 | 240 | 3 x 60 | 4 x 30 |
| Ø in mm | 6.2 | 8.7 | 12.4 | 17.5 | 3x8.7 | 4x6.2 |
| Cat. No. | 1663-100 (100 pcs.) | 1664-100 (100 pcs.) | 1665-100 (100 pcs.) | 1666-100 (100 pcs.) | 1667-100 (100 pcs.) | 1668-100 (100 pcs.) |
|  | Slide carrier with ring | Slide carrier for two chambers | Slide carrier with ring | Slide carrier for two chambers | Slide carrier with ring | Slide carrier for two chambers |
| Slide carrier (autoclavable) |  |  |  |  |  |  |
| Cat. No. | 1662 | 1670 | 1662 | 1670 | 1662 | 1670 |
|  | | | | | | |
| Filter cards for 1662 |  |  |  |  |  |  |
| Cat. No. | 1675 (200 pcs.) | 1675 (200 pcs.) | 1675 (200 pcs.) | 1676 (100 pcs.) | 1677 (100 pcs.) | 1678 (100 pcs.) |
|  | | | | | | |
| Filter cards for 1670 |  |  |  |  |  |  |
| Cat. No. | 1692 (200 pcs.) | 1692 (200 pcs.) | 1692 (200 pcs.) | 1691 (100 pcs.) | 1694 (100 pcs.) | 1693 (100 pcs.) |







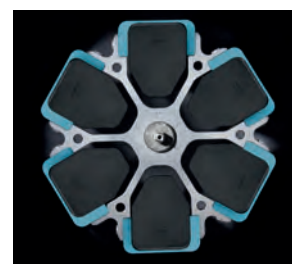



SYSTEM 3 – rotors and equipment

SWING-OUT ROTORS

| | | | |
|--|---|---|--|
| Swing-out rotor, 4-place For ROTOFIX 32 A UNIVERSAL 320 / 320 R |  | |  |
| max. RPM max. RCF | 4,000 min ⁻¹ 1,467 | + | lid |
| max. capacity | 4 cyto chambers | | inclusive |
| run-up run-down, braked in sec | 20 25 | | Cat. No. |
| angle | 90° | | 1680 |
| Cat. No. | 1624 | | |
| Swing-out rotor, 6-place For ROTOFIX 32 A UNIVERSAL 320 / 320 R |  | |  |
| max. RPM max. RCF | 5,000 min ⁻¹ 1,842 | + | lid |
| max. capacity | 6 cyto chambers | | inclusive |
| run-up run-down, braked in sec | 20 22 | | Cat. No. |
| angle | 90° | | 1680 |
| Cat. No. | 1626 | | |







CYTO CHAMBERS

| | | | | |
|---|---|---|---|---|
| |  |  |  | |
| Cyto chambers | | | | |
| area in mm ² | 30 | 60 | 120 | |
| Ø in mm | 6.2 | 8.7 | 12.4 | |
| Cat. No. | 1671-100 (100 pcs.) | 1672-100 (100 pcs.) | 1673-100 (100 pcs.) | |
|  | Slide carrier with ring | Slide carrier with ring | Slide carrier with ring | |
| Slide carrier (autoclavable) |  |  |  |  |
| Cat. No. | 1662 | 1662 | 1662 | 1696 (100 pcs.) |
| | | | |  |
| | | | | 1697 (100 pcs.) |
| | | | |  |
| | | | | 1698 (100 pcs.) |

ROLLING CABINETS

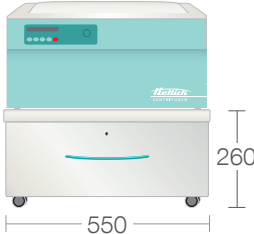



All rolling cabinets are of sturdy design and feature castors and two locks. Any vibrations of the centrifuge are safely compensated for.

| | | | |
|---|---|--|---|
|  |  |  |  |
| Low and narrow, with one drawer. Depth 650 mm | Low and wide, with one drawer. Depth 650 mm | High and narrow, with two drawers. Depth 650 mm | High and wide, with two drawers. Depth 650 mm |
| Cat. No. 4612-A | Cat. No. 4614-A | Cat. No. 4613-A | Cat. No. 4615-A |

| MODEL | ROTOFIX | UNIVERSAL | | ROTINA | | ROTINA | | ROTANTA | | ROTOFIX | |
|-----------------|---------|-----------|-------|--------|-------|--------|-------|---------|-------|---------|------|
| Model variant | 32 A | 320 | 320 R | 380 | 380 R | 420 | 420 R | 460 | 460 R | 46 | 46 H |
| 4612-A + 4613-A | • | • | • | • | • | • | | • | | • | • |
| 4614-A + 4615-A | | | | | | | • | | • | | |

• Rolling cabinet is compatible for the marked model.

ACCESSORIES FOR CENTRIFUGING BLOOD BAG SYSTEMS

| | | | |
|--|---|---|--|
|  |  |  |  |
| HettLiner Blood bags can be secured in inserts using HettLiners. After centrifuging, they can be removed by their loops without disturbing the sediment. | Compensatory weights (set) If blood bag carriers are not filled to the same weight, then compensatory weights can be used to make up the difference. One set includes: 40 balancing weights, 2 g each; 20 balancing weights, 5 g each; 10 balancing weights, 10 g each; 5 balancing weights, 20 g each; 5 balancing weights, 40 g each | Balancing inserts* In case there are not enough blood bag systems to occupy every carrier of the rotor, empty carriers can be filled with balancing inserts. Taring weights supplied with the inserts may be used for fine balancing. | Loading aid Secure your samples and avoid accidental spillage with the convenient Loading aid for centrifuge inserts. The Hettich Loading aid allows users to confidently hold and manage their samples without the risk of the inserts toppling over. |
| Cat. No. 4564 | Cat. No. 4566 | 4584-A for insert 4559-A 4587-A for insert 4592-B 4589-A for insert 4516-A | Cat. No. 4509 |

* Can only be used for ROTO SILENTA 630 RS inserts.

INCUBATORS

Efficient use of valuable space



HETTCUBE 200 | 200 R
on page 186



HETTCUBE 400 | 400 R
on page 186



HETTCUBE 600 | 600 R
on page 186



HETTCUBE 60
on page 197



HETTCUBE 120
on page 197

HETTCUBE INCUBATORS

With touchscreen and more options

With the touch screen, HettCube incubators and cooled incubators guarantee intuitive operation with flexible and individual setting options and many new features. The proven combination of natural and forced convection ensures stable and homogeneous temperatures in a much larger part of the interior than conventional incubators. This offers you up to 30% more validated useful space with the same interior space. In addition, the high design of the HettCube incubators requires up to 50% less floor space with comparable capacity.

FEATURES

- Maximal validated usable space on a small footprint
- One-hand operation without additional inner door
- 4.3 inch touch display for intuitive operation
- Automatic door closure with magnetic seals, door orientation can be easily changed
- Low noise level of ≤ 44 dB(A)
- TÜV certified and factory certificate HettCert with 9 measuring points according to DIN 12880:2007-5 standard
- HettCube without cooling requires only 1 °K (1 °C) above stable ambient temperature
- Models with IVDR approval
- Inclusive up to 3 standard shelves and 1 HTS shelf with telescopic rail

Additionally for cooled models:

- Temperature drop with holiday function
- Temperature selection monitor class 3.2

FIELDS OF APPLICATION

- Microbiological laboratories
- Hospital
- Pharmaceutical laboratories
- Food analyzing laboratories
- Scientific laboratories in universities
- Cosmetic industry
- Food and beverage
- Agricultural industry
- Life science



according to regulation (EU) 2017/746



* also available as General Purpose version.

TECHNICAL DATA



HettCube 200 | 200 R

HettCube 400 | 400 R

HettCube 600 | 600 R

| | | | |
|--|--|--|--|
| Temperature range for incubators cooled incubators | 1 K above ambient temperature up to +65 °C 0 °C up to +65 °C | 1 K above ambient temperature up to +65 °C 0 °C up to +65 °C | 1 K above ambient temperature up to +65 °C 0 °C up to +65 °C |
| Exterior dimensions (without access port and door handle) W x D x H in mm | 710 x 825 x 970 | 710 x 825 x 1425 | 710 x 825 x 1,990 |
| Interior dimensions W x D x H in mm | 535 x 690 x 420 | 535 x 690 x 850 | 535 x 690 x 1,415 |
| Internal volume in liters | 150 | 310 | 520 |
| Validated usable volume in liters | 82 | 199 | 351 |
| Percentage validated usable volume / internal volume | 54 % | 64 % | 67 % |
| Footprint in m ² | 0.6 | 0.6 | 0.6 |
| Weight in kg | 92 103 | 117 128 | 164 175 |
| Number of shelves provided as standard | 2 (1 standard + 1 HTS) | 3 (2 standard + 1 HTS) | 4 (3 standard + 1 HTS) |
| Temperature fluctuation at +37 °C | ± 0.1 K | ± 0.1 K | ± 0.1 K |
| Temperature uniformity at +37 °C | ± 0.2 K | ± 0.2 K | ± 0.2 K |
| Temperature uniformity at +25 °C | ± 0.1 K | ± 0.1 K | ± 0.1 K |
| Recovery time after door has been opened for 30 s at +37 °C | ≤ 3 min | ≤ 4.5 min | ≤ 5.5 min |
| Energy consumption at +37 °C | 0.038 kWh/h | 0.046 kWh/h | 0.056 kWh/h |
| Noise level | ≤ 41 dB (A) ≤ 44 dB (A) | ≤ 41 dB (A) ≤ 44 dB (A) | ≤ 41 dB (A) ≤ 44 dB (A) |
| Power supply | 220 – 240 V 1 ~ / 50 – 60 Hz | 220 – 240 V 1 ~ / 50 – 60 Hz | 220 – 240 V 1 ~ / 50 – 60 Hz |
| Cat. No. | 62000 62005 | 64000 64005 | 66000 66005 |
| General Purpose version | 62001 62006 | 64001 64006 | 66001 66006 |
| Other voltages | | | |
| 100-120 V 1 ~ / 50 – 60 Hz | 62000-01 62005-01 | 64000-01 64005-01 | 66000-01 66005-01 |


MORE OPTIONS AND ACCESSORIES



Switchboard



Rack for petri dishes

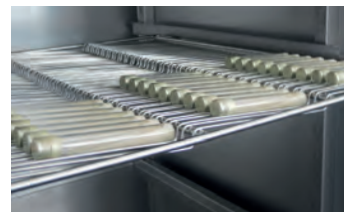

Rack for Loewenstein application

| | Cat. No. |
|---|--------------|
| Shelf (Set) Made of stainless steel, with standard rails, max. load (kg): 50 | 60001 |
| Shelf (HTS-Set) Made of stainless steel, with telescopic rails, extendable up to 70 %, max. load (kg): 40 | 60031 |
| Drawer (HTS-Set), High 30 mm Made of stainless steel, with telescopic rails, extendable up to 70 %, tightly welded, max. load (kg): 40 | 60024 |
| Drawer (HTS-Set), High 65 mm Made of stainless steel, with telescopic rails, extendable up to 70 %, tightly welded, max. load (kg): 40 | 60025 |
| Drawer (HTS-Set), High 105 mm Made of stainless steel, with telescopic rails, extendable up to 70 %, tightly welded, max. load (kg): 40 | 60026 |
| Rack (HTS-Set) For Petri dishes, stainless steel, with telescopic rails, extendable up to 70 %, Petri dishes Ø (mm): 90, max. load (pcs): 90 | 60038 |
| Rack (Set) For Petri dishes, stainless steel, with standard rails, Petri dishes Ø (mm): 90, max. load (pcs): 90 | 60039 |
| Rack For Petri dishes, stainless steel, Petri dishes Ø (mm): 90, max. load (pcs): 90 | 60040 |
| Rack (HTS-Set) For inclined storage of cultures (Loewenstein), stainless steel, with telescopic rails, extendable up to 70 %, inclination angle: 5°, tube Ø (mm): 15-20, max. load (pcs): 81tube | 60036 |
| Rack (Set) For inclined storage of cultures (Loewenstein), stainless steel, with standard rails, inclination angle: 5°, tube Ø (mm): 15-20, max. load (pcs): 81 tubes | 60037 |
| Rack For inclined storage of cultures (Loewenstein), stainless steel, inclination angle: 5°, tube Ø (mm): 15-20, max. load (pcs): 81 tubes | 60041 |
| Frame L, 16-place Made of stainless steel, for inclined storage of cultures, tube Ø (mm): 15-20, Tube length (mm): 100-125, inclination angle 5° or 20 ° | 60027 |
| Frame XL, 16-place Made of stainless steel, for inclined storage of cultures, tube Ø (mm): 15-20, Tube length (mm): 126-170, inclination angle 5° or 20 ° | 60028 |
| Switchboard 4-fold socket strip, as a unit controllable via display, on the back of the device | 60521 |
| Independent PT 100 sensor For independent temperature measurement, four-wire system, temperature values output with analogue output 4-20 mA on the back of the device | 60503 |
| Passive dehumidification For individual or timed opening of a dehumidification module via the touchscreen | 60042 |
| Service: Assembly of the Stacking kit for the HettCube 200 200 R | 60043 |
| Service: Changing the door hinge | 60044 |
| Glass door All-glass outer door, for HettCube 200 200 R | 60030 |
| Glass door All-glass outer door, for HettCube 400 400 R | 60029 |
| Glass door All-glass outer door, for HettCube 600 600 R | 60013 |
| Access port Ø (mm): 22, Foam stoppers | 60006 |
| Access port Ø (mm): 42, Foam stoppers | 60007 |
| Access port Ø (mm): 67, Foam stoppers | 60008 |
| Stacking kit For safe stacking of two HettCubes 200 200 R | 60009 |
| Rolling cabinet Lockable, with one drawer, incl. lockable castors, WxDxH (mm): 770x800x550, for HettCube 200 200 R | 60010 |
| USB Port Lock (Set) For securing the USB-A interface. Set consisting of 10 securing clips and 1 USB key tool. | 60525 |
| Parameter for continuous cooling operation For storing samples below 15 °C for more than 2 weeks | 60526 |

— EXTENSIVE STANDARD EQUIPMENT



4.3 inch touchscreen



Shelf (HTS-Set) with telescopic rails



Access port on rear panel
Ø 42 mm

4.3 inch touchscreen:

- Target / actual display
- Setting accuracy 0.1 ° C
- Real-time calendar
- Timer
- Language options (English, German, French and Spanish)
- Temperature diagram in 3 zoom levels (up to 4 weeks)
- Power failure scenarios
- Door alarm individually adjustable
- Log (door openings, alarms and operating hours)
- PIN lock
- Up to 99 program functions (Start/Stop, Period, Timer at start, Timer at temperature, ...)
- Temperature selection monitor class 3.1 for all models

Additionally with refrigerated devices

- Temperature reduction with holiday function
- Temperature selection monitor class 3.2 for all refrigerated models
- Programming external devices via switchboard (option)

Control panel and door lockable simultaneously

USB service interface

Bushing on rear panel Ø 42 mm

Potential-free alarm output

Interior of high-quality stainless steel (W-St 1.4301 (ASTM 304))

In addition you get for free ...

Up to 3 Shelf standard shelves of stainless steel (depending on model size)

HTS shelf of stainless steel with telescopic rails

Factory certificate (HettCert) – 9 points measurement analog to DIN 12880: 2007-05

Rebates available for unused shelves*

* Choose other shelves / drawers as standard, we credit you the price of unused standard inserts.

— EVERYTHING UNDER CONTROL



INTUITIVE OPERATION WITH TOUCHSCREEN

Get clear and concise information on your incubation process – at a glance! With the new 4.3 inch touchscreen and intuitive menu dashboard, you can easily view the status of the device, as well as any alarms and events in the past 4 weeks. Any event or irregularity (such as door openings, tolerance band violations or power failures) are electronically documented in the logbook.




EASY WEEKLY PROGRAMMING

The user-friendly touchscreen allows for uncomplicated adjustment of weekly programming without additional software – directly on the device. The holiday function allows you to define additional temperature drops for your days off already months in advance. Easily determine the start time or the time period as well as the frequency of your Temperature reduction in a real-time calendar.



— SAFETY FOR YOUR SAMPLES



FLEXIBLE SETTINGS

Various events and alarm functions are individually adjustable. For example: Deviations from the interior temperature can be limited individually over tolerance range limits or fixed via independent temperature safety device of Classes 3.1 and 3.2. Class 3.2 is already included in the standard version of all refrigerated HettCubes.



PROCESS RELIABILITY EVEN IN THE EVENT OF A POWER FAILURE

With the new HettCube generation, you can keep control over your samples even in the event of a power failure. Define by yourself two different settings options how your HettCube's should behave in the event of a power failure.

Setting the period

By default, the device automatically restarts at the point where the power failed. But Users can also define the acceptable length of time in the event of a power failure. Once power is restored, the HettCube will verify whether this pre-set period has been exceeded. Should this be the case, the settings will be paused and the incubator will automatically move to a Standstill (Safe) Mode. Otherwise, the unit will continue with normal operation and user settings.

Setting the tolerance band

Tolerance band limits and holding temperature are individually configurable. After a power failure, the HettCube checks whether there is a tolerance band violation. The HettCube then automatically adjusts to the previous configured holding temperature. If there is no violation of the tolerance band the HettCube resumes its work.



PERFECT CONDITIONS

HettCube incubators combine the advantages of natural and forced convection to provide a stable and uniform environment for cultures. The fan is housed outside of usable space, providing higher throughputs and limiting airflow inside the incubator. Temperature is primarily maintained by radiated heat to ensure even temperature distribution and to prevent hot spots. This yields optimum growth conditions and considerably reduces the potential of samples drying out.

— MAXIMUM USABLE SPACE – SMALLEST FOOTPRINT



30 % MORE VALIDATED USABLE SPACE

Due to their gentle air flow and edge-to-edge temperature uniformity, HettCube incubators provide up to 30 % more validated usable space* than a traditional incubator with the same internal volume.

*in accordance with DIN 12880:2007-05

■ 520 liters of interior space

■ 351 liters of validated usable space*

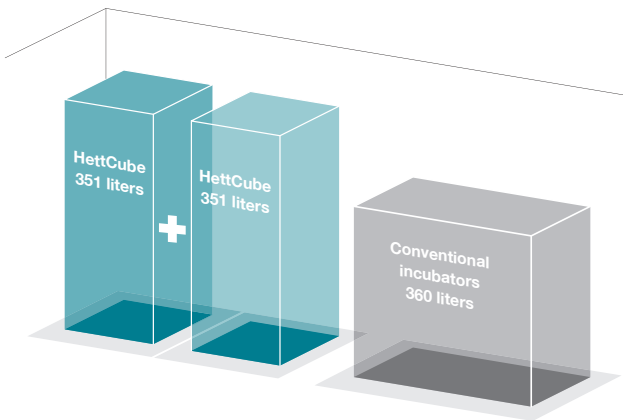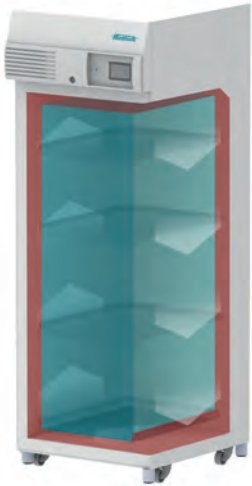

50 % SMALLER FOOTPRINT

The HettCube's upright design requires up to 50 % less floor space than a traditional incubator with similar capacity. The space saving footprint allows you to nearly double your capacity by accommodating two HettCube incubators within the same footprint as one conventional incubator.

■ HettCube

702 liters of validated usable space with the same footprint

■ Conventional incubators

360 liters of validated usable space

| HettCube | Conventional incubators |
|---|---|
| Gentle air flow + High-performance insulation + Small footprint = | Strong air flow + Bulky insulation + Large footprint = |
| Maximum loading capacity + Cost savings per m ² laboratory space | Low loading capacity + Higher costs per m ² laboratory space |


HEAT COMPENSATION

RELIABLE COMPENSATION OF TEMPERATURE DIFFERENCES BETWEEN THE INSIDE AND OUTSIDE

HettCube models react to changes in ambient conditions. Temperature fluctuations outside the incubator and energy introduced into the usable space by external equipment are compensated for immediately and actively.

Heat compensation of the HettCube 200 R | 400 R | 600 R

Lowest attainable temperature values upon introduction of equipment with different heat outputs.

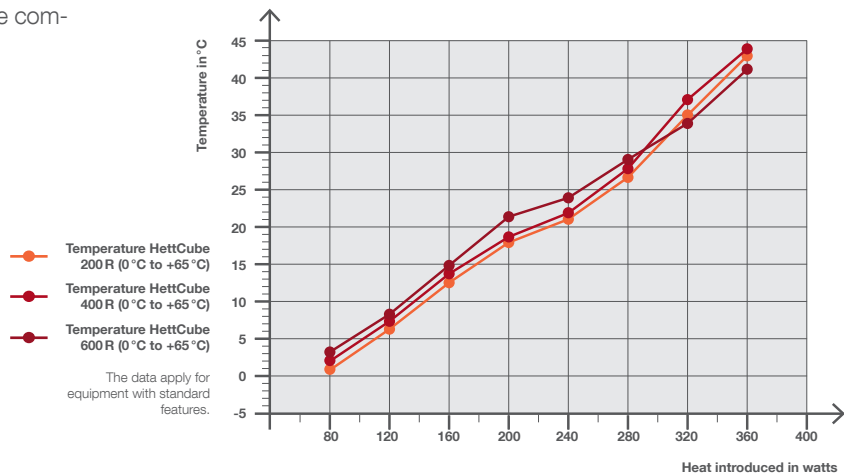


HETTCUBES WITH GLASS DOOR

The optional glass door enables users to check on their cultures without opening the door.



Condensation diagram for HettCubes size 200 R | 400 R | 600 R with glass door at an ambient temperature of +22 °C

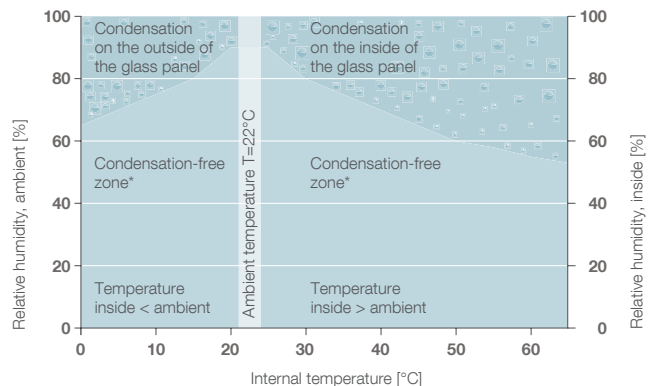

*Condensation possible in the boundary areas

— LOW ENVIRONMENTAL IMPACT



Minimal operating costs

Our HettCubes heat or cool only when needed. At an operating temperature of 37 °C a HettCube incubator consumes less than 0.056 kWh/h. This brings average savings of up to 450 Euro annually*. Therefore, investment costs are recouped within shorter time. The use of a HettCube incubator saves on average up to 940 kg of CO₂ emissions annually*. Additionally: The insulation of the HettCubes consists of water-driven foam, which contains no fluorinated hydrocarbons. Their GWP value (Global Warming Potential) is a thousand times lower than that of conventional insulating foams.

*Assuming 24h operation 365 days a year. The basis for calculation is € 0.29 per kWh/h – the average price of electricity in Germany in 2018 and 0.6 kg CO₂ per kWh/h.

First-class isolation

The advanced control system and insulation mean that the incubator will maintain a set temperature even if there is only a difference of 1 K (°C) from the ambient temperature. This allows an uncooled HettCube incubator to be used in situations in which a comparable incubator would require cooling.

— PROVEN QUALITY



Certifications

Hettich products comply with all applicable safety regulations, carry the TÜV seal and are compliant with IVDR. Hettich manufactures according to the applicable quality and environmental management systems, including ISO 9001, ISO 13485 and ISO 14001.

Each HettCube is temperature validated before delivery by means of the 9 point measurement and receives a HettCert factory certificate, included free of charge. All temperature data are determined according to DIN 12880: 2007-5.

PRODUCT VIDEOS

Would you like to learn more about this product? Scan the QR Code to visit our YouTube channel:

www.youtube.com/hettichlabtechnology



SMALL INCUBATORS

More compact, just as efficient.




HettCube incubators are known for their large usable space within a small footprint. These two factors are crucial in laboratories with lower throughput and where every square meter is precious. Our small HettCubes fit perfectly as a compact benchtop unit for this purpose. The slim design combined with a wide range of functions makes the HettCube 60 and HettCube 120 desirable in terms of quality and price.

— INTUITIVE OPERATION WITH TOUCHSCREEN



Get clear and concise information – at a glance! With the 4.3-inch touchscreen and intuitive dashboard, you can easily view the device's status, alarms, and events. Every event or irregularity such as door opening or tolerance band violations are electronically documented in the logbook. Tolerance band limits can be fixed via the Class 2.0 and 3.1 temperature selector/monitor and saved as a program with up to 6 segments with different time-temperature profiles.

— TWO VARIANTS FOR THE PERFECT TEMPERATURE CONTROL



The HettCubes 60 and 120 are available in two variants, natural or forced convection. The advantages of natural convection is gentle temperature control and lower energy consumption. It is particularly suitable for samples sensitive to desiccation. Compared to natural convection, forced convection is significantly faster and more effective in heat generation as well as in heat regeneration after door opening. Both systems combine sophisticated technology for air guidance and thus guarantee reproducible results of your samples' best growth conditions.

TECHNICAL DATA



HettCube 60
natural convection



HettCube 60
forced convection



HettCube 120
natural convection



HettCube 120
forced convection

| | | | | |
|---------------------------------------|--------------------------------------|--|--------------------------------------|--|
| Temperature range | 5 K above ambient temp. up to +65 °C | 7,5 K above ambient temp. up to +65 °C | 5 K above ambient temp. up to +65 °C | 6,3 K above ambient temp. up to +65 °C |
| Exterior dimensions W x D x H in mm | 590 x 620 x 710 | 590 x 620 x 710 | 660 x 710 x 850 | 660 x 710 x 850 |
| Interior dimensions W x D x H in mm | 400 x 360 x 390 | 400 x 360 x 390 | 460 x 450 x 540 | 460 x 450 x 540 |
| Internal volume in liters | 56 | 56 | 112 | 112 |
| Footprint in m ² | 0,36 | 0,36 | 0,46 | 0,46 |
| Weight in kg | 62 | 62 | 82 | 82 |
| Number of shelves (scope of delivery) | 2 | 2 | 2 | 2 |
| Maximum number of shelves | 5 | 5 | 7 | 7 |
| Maximum load in kg | 40 | 40 | 60 | 60 |
| Temperature fluctuation at (+37°C) | ± 0,7 K | ± 0,1 K | ± 0,4 K | ± 0,1 K |
| Temperature uniformity at (+37°C) | ± 0,8 K | ± 0,3 K | ± 0,8 K | ± 0,3 K |
| Power supply | 220-240 V 1 ~ / 50 – 60 Hz | 220-240 V 1 ~ / 50 – 60 Hz | 220-240 V 1 ~ / 50 – 60 Hz | 220-240 V 1 ~ / 50 – 60 Hz |
| Cat. No. | 69601-10 | 69601-20 | 61201-10 | 61201-20 |
| 100-127 V 1 ~ / 50 – 60 Hz | 69601-11 | 69601-21 | 61201-11 | 61201-21 |



EXTENSIVE STANDARD EQUIPMENT



Standard wire shelf



Door lock



Access port

4.3 inch touchscreen:

- Dashboard with target / actual display, program status, events, settings, languages (DE, EN, FR, ES)
- Logbook (door openings, events, alarms)
- Class 2.0 and Class 3.1 temperature selector with visual and audible temperature alarm
- Internal memory for programs and data
- Optical and acoustic alarm in case of open door

Door lock

LAN and USB ports

Interior made of high quality stainless steel


2 x standard wire shelves of stainless steel

Access port on left panel Ø 30 mm

Electric air flap with variable opening degree

2 x PT 100 temperature sensors

ACCESSORIES

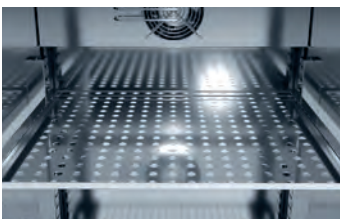

Perforated shelf



Reinforced wire shelf



Internal glass

| | Cat. No. |
|---|----------|
| Standard wire shelf for HettCube 60 Stainless steel, with standard rails, max. load (kg): 25 | 60045 |
| Perforated shelf for HettCube 60 Stainless steel, with standard rails, max. load (kg): 25 | 60046 |
| Reinforced wire shelf for HettCube 60 Stainless steel, with standard rails, max. load (kg): 50 | 60047 |
| Internal glass door for HettCube 60 | 60051 |
| Standard wire shelf for HettCube 120 Stainless steel, with standard rails, max. load (kg): 25 | 60052 |
| Perforated shelf for HettCube 120 Stainless steel, with standard rails, max. load (kg): 25 | 60053 |
| Reinforced wire shelf for HettCube 120 Stainless steel, with standard rails, max. load (kg): 50 | 60054 |
| Internal glass door for HettCube 120 | 60055 |

ENVIRONMENTAL PRODUCTS

Testing for Food, Agro, Pharma & Life Science

Are you looking for climate control equipment? We are specialized in the design, manufacture, installation and maintenance of such equipment. Hettich delivers standard equipment which can be adapted to your application. The product range includes all forms of simulation with the ability to control such variables as temperature, humidity and light.

For further information, please visit the website www.hettichbenelux.com or give us a call.



PLANT GROWTH CABINETS



STABILITY CABINETS

CONTROL PANELS

The control panels from Hettich are easy to operate and specifically tailored to users' needs. Entry of the parameters is fast, precise and convenient by way of an adjuster knob and / or selector keys on a foil keypad. The intuitive display shows the actual values in digital format while the centrifuge is running.

E CONTROL PANEL



EBA 270



ROTOFIX 32 A

The E(conomy) control panel is fitted in the EBA 270 and ROTOFIX 32 A models. The required centrifugation parameters can be entered quickly and easily on the user-friendly keypad:

DISPLAY

| | |
|-----|---|
| RPM | Speed indication. Entry in increments of 100. |
| t | Time indication. Entry in minutes. max. 99 min. |

KEYPAD

| | |
|-------|--|
| ▲ | Increases the relevant value. |
| ▼ | Decreases the relevant value. |
| PULSE | For short centrifugation steps. |
| OPEN | Opens the lid (EBA 270). |
| START | Starts centrifugation. |
| STOP | Stops centrifugation manually |
| RCF | Switches from RPM to RCF display (ROTOFIX 32 A). |

E PLUS CONTROL PANEL



The models EBA 200, EBA 200 S, HAEMATOKRIT 200 and MIKRO 185 are operated with the E Plus control panel. In contrast to the E control panel this allows entry of the speed (RPM) or the relative centrifugal force (RCF).


DISPLAY

| | |
|---------|--|
| RCF | Relative centrifugal force. |
| RPM | Speed indication. Entry in increments of 10. |
| t/min:s | Centrifugation time (max. 99 min : 59 sec). |

KEYPAD

| | |
|--------|---|
| ▲ | Increases the relevant value. |
| ▼ | Decreases the relevant value. |
| RCF | Switches from RPM to RCF display. Entry of the RCF in increments of 1. Input of rotor radius in mm in RCF mode. |
| SELECT | Guides the user through the menu options. |
| START | Starts centrifugation. |
| PULSE | For short centrifugation steps. |
| STOP | Stops centrifugation manually. |
| OPEN | Opens the lid at standstill. |

M CONTROL PANEL

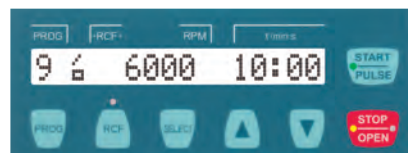

Centrifuge models EBA 280 and EBA 280 S are equipped with the M control panel. The parameters are selected with the Select key and the desired values are set using arrow keys and stored by pressing the Start/Pulse key.

DISPLAY

| | |
|---------|--|
| PROG | Program number. Ten programmable memories are available. |
| >RCF< | Relative centrifugal force. |
| RPM | Speed indication. Entry in increments of 10. |
| t/min:s | Centrifugation time (max. 99 min : 59 sec). |

KEYPAD

| | |
|--------|--|
| PROG | Selects the program menu to call up or store programs. |
| RCF | Switches from RPM to RCF display. Entry of the RCF in increments of 1. Entry of the centrifuging radius in mm. |
| SELECT | Guides the user through the menu options. |
| ▲ | Increases the relevant value. |
| ▼ | Decreases the relevant value. |
| START | Starts centrifugation. |
| PULSE | For short centrifugation steps. |
| STOP | Stops centrifugation manually. |
| OPEN | Opens the lid at standstill. |

A LED IN THE KEYBOARD LIGHTS UP:

- when the RCF display is activated (RCF key)
- during centrifugation (Start/Pulse key)
- during the braking period (Start/Open key – LED at the right)
- if the lid can be opened (Start/Open key – LED at the left)

N PLUS CONTROL PANEL



The MIKRO 200 / 200 R. MIKRO 220 / 220 R. UNIVERSAL 320 / 320 R and ROTOFIX 46 / 46 H models are quick and easy to operate using this variant of the N control panel. The parameters are selected with the Select key. An adjuster knob is used to set the values. and the settings are stored by pressing the Start/Impulse key.

DISPLAY

| | |
|-------|---|
| P | Program number. Four (MIKRO 200 / 200 R) or 10 (MIKRO 220 / 220 R. UNIVERSAL 320 / 320 R. ROTOFIX 46 / 46 H) programmable memories are available. |
| T/°C | Temperature of refrigerated and heatable centrifuges. The temperature of the refrigerated models is infinitely variable between -20 °C and +40 °C (MIKRO 220 R. UNIVERSAL 320 R) or between -10 °C and +40 °C (MIKRO 200 R). Model ROTOFIX 46 H can be heated up to +90 °C. |
| >RCF< | Relative centrifugal force. |
| RPM | Speed indication. Entry in increments of 10. |
| t/min | Centrifugation time (max. 99 min : 59 sec). |
| —/— | Entry of the acceleration ramp 1 – 9 |
| —/— | Entry of the braking ramp 1 – 9 |

KEYPAD

| | |
|--------|--|
| ❄️ | Pre-cools the rotor chamber (MIKRO 200 R. MIKRO 220 R and UNIVERSAL 320 R) to the required temperature. |
| 🔥 | Heats the rotor chamber of the ROTOFIX 46 H to the required temperature. |
| RCF | Switches from RPM to RCF display. Entry of the RCF in increments of 10. Input of rotor radius in mm in RCF mode. |
| SELECT | Guides the user through the menu options. |
| START | Starts centrifugation. |
| PULSE | For short centrifugation steps. |
| STOP | Stops centrifugation manually. |
| OPEN | Opens the lid at standstill. |

C CONTROL PANEL



The advanced C control panel significantly facilitates the daily laboratory routine. Parameter selection is done via the use of symbol keys. Values are set with the control knob. and recorded by pressing the Start key. The temperature in the refrigerated ROTINA 380 R. ROTINA 420 R, ROTANTA 460 R and ROTANTA 460 Robotic centrifuges can be set in either Celsius (°C) or Fahrenheit (°F) degrees.

DISPLAY

| | |
|------|--|
| PROG | Entry and recall of the program number. 98 programs can be stored. |
| T/°C | Entry of the temperature from -20 °C to +40 °C or -4 °F to +104 °F in increments of 1 with refrigerated models. |
| —/— | Entry of the run-up time in ramps 1 – 9 or in min : sec. Entry of the run-down time in ramps R 1 – 9 and B 1 – 9 or in min : sec. Also unbraked run-down or a brake force cut-off speed can be selected. |
| RCF | Entry of the relative centrifugal force in increments of 1. Entry of the centrifuging radius (RAD) in mm. |
| RPM | Entry of the speed in increments of 10. |
| TIME | Entry of the centrifugation time (max. 99 h : 59 min : 59 sec) or continuous operation. |

KEYPAD


| | |
|-------|----------------------------------|
| START | Starts centrifugation. |
| START | Starts short centrifugation. |
| START | Stores entries and changes. |
| ❄️ | Starts pre-cooling program PREC. |
| STOP | Stops centrifugation manually. |
| OPEN | Opens the lid at standstill. |

Centrifuges with C control panel permit the centrifugation time to be switched from „at start“ (commencing upon start) to „at speed“ (start when the set speed has been reached).

OPTIONS

PROGRAM INTERLOCKING: to combine several centrifugation runs.

S CONTROL PANEL

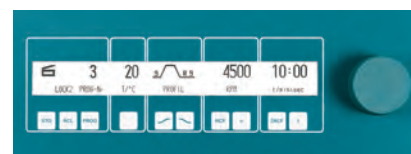

This special-class control panel is standard with the ROTIXA 500 RS and ROTO SILENTA 630 RS floorstanding centrifuges.

DISPLAY

| | |
|-----------|--|
| PROG-Nr | Program number. 89 programmable memories are available. |
| T/°C | Temperature. |
| PROFIL | Run-up and run-down profile. |
| n/min-1 | Speed indication. |
| t/min:sec | Centrifugation time (max. 999 min : 59 sec). |

KEYPAD

| | |
|-------|---|
| STO | Stores the program. |
| RCL | Calls up the selected program. |
| PROG | Selects the program menu. |
| □ | Entry of the temperature from -20 °C to +40 °C in increments of 1 °C. Entry of the rotor radius in mm in RCF mode |
| RCF | Switches from RPM to RCF display. Entry of the RCF in increments of 1. |
| —/— | Entry of the run-up time in ramps 1 – 9 or in min : sec. |
| —/— | Entry of the run-down time in ramps R 1 – 9 and B 1 – 9 or in min : sec. Also unbraked run-down or a brake force cut-off speed can be selected. |
| ∫ RCF | The integral over the RCF indicates the overall RCF acting on the centrifuged material during the running time so far. |
| n | Entry of the speed in increments of 10. |
| t | Entry of the centrifugation time (max. 999 min : 59 sec) or continuous operation. |
| START | Starts centrifugation. |
| STOP | Stops centrifugation manually. |













OPTIONS












PROGRAM INTERLOCKING: to combine several centrifugation runs.

DATA REPORT SYSTEM:

For detailed information on this subject, please refer to the HettInfo section on pages 162-163.

CENTRIFUGE CAPACITY GUIDE

| Commonly-used tubes at a glance |  |  |  |  |  |  |  |  |  |  |
|-------------------------------------|---|---|---|---|---|--|---|---|---|---|
| Volume in ml | 0.2 - 2 | 8 x 0.2 | 0.5 | 15 | 50 | 100 | 250 | 1.6 - 7 | 4 - 10 | 15 |
| W x D x H in mm | | | | | | | | | | |
| Ø x L in mm | 6-11 x 38 | - | 11 x 36 | 17 x 100 | 34 x 100 | 40 x 115 | 65 x 115 | 13 x 75/100 | 16 x 75/100 | 17 x 120 |
| Centrifuge models | Maximum number of tubes per centrifuge | | | | | | | | | |
| MANUAL CENTRIFUGE | - | - | - | 4 | - | - | - | 4 | 4 | 4 |
| EBA 200 EBA 200 S | - | - | 8 | 8 | - | - | - | 8 | - / 8 | 4 |
| EBA 200 MD | - | - | - | - | - | - | - | 8 | - / 8 | 4 |
| EBA 270 | - | - | 6 | 6 | - | - | - | 6 | 6 | - |
| EBA 280 EBA 280 S | - | - | 12 | 12 | 6 | - | - | 12 | 8 / 12 | 6 |
| MIKRO 185 | 24 | - | 12 | - | - | - | - | - | - | - |
| MIKRO 200 200 R | 30 | - | 15 | - | - | - | - | - | - | - |
| MIKRO 220 220 R | 48 (60) | - | 15 | 12 | 6 | - | - | 12 | 12 | 6 |
| ROTOFIX 32 A | (36) | - | 24 | 32 | 6 | 4 (44 x 100 mm) | - | 40/32 | 28/32 | 32 |
| ROTOFIX 32 A MD | - | - | - | - | - | - | - | 40/32 | 28/32 | 32 |
| UNIVERSAL 320 320 R | 30 | 24 x 8 | 15 | 32 | 6 | 4 (44 x 100 mm) | - | 40/32 | 28/32 | 32 |
| ROTINA 380 380 R | 30 | - | 15 | 52 | 12 | 4 (44 x 100 mm) | 4 | 64/76 | 52 | 36 |
| ROTINA 420 420 R | 30 (96) | - | 15 | 72 | 16 | 12 | 4 | 104/84 | 72 | 52 |
| ROTANTA 460 460 R | 30 (224) | - | 15 | 148 | 16 | 12 | 6 | 196 | 148 | 96 |
| ROTOFIX 46 | - | - | - | 48 | 8 | 4 | 4 | - | - | 28 |
| ROTANTA 460 RC 460 RF | 30 (224) | - | 15 | 148 | 16 | 12 | 6 | 196 | 148 | 96 |
| ROTIXA 500 RS | (336) | - | - | 168 | 24 | 16 | 6 | 200 | 168 | 112 |
| ROTO SILENTA 630 RS | - | - | - | 180 | 36 | 24 | - | 180 | 180 | 138 |
| MIKRO 220 Robotic |  24 /  12 | - | - | - | - | - | - | - | - | - |
| SBS 300 Robotic | - | - | - | - | - | - | - | - | - | - |
| ROTINA 380 380 R 380 RC Robotic | | | | on request | | | | 48 | 48 | on request |
| ROTANTA 460 Robotic | | | | on request | | | | 80 | 80 | on request |
| ROTOLAVIT II | - | - | - | 24 x 5 ml | - | - | - | - | - | - |

|           | | | | | | | | | | Maximum performance of the centrifuges | |
|--|-------------------|-------------------|--------------|----------|-----------------|---------------|------------|----|----|---|----------------------------|
| 50 | 250/500 | 250/290 | 650/750 | 1,000 | 2,000 | MTP | 500 | - | - |  | |
| 29 x 115/115 | 60 x 162/96 x 147 | 61 x 122/62 x 137 | 97 x 139/152 | 96 x 176 | 150 x 100 x 180 | 128 x 15 x 86 | 4-place | - | - | | |
| Maximum number of tubes per centrifuge | | | | | | | | | | max. RCF | max. RPM min ⁻¹ |
| - | - | - | - | - | - | - | - | - | - | 1,298 | 3,000 |
| - | - | - | - | - | - | - | - | - | - | 3,461 6,153 | 6,000 8,000 |
| - | - | - | - | - | - | - | - | - | - | 3,461 | 6,000 |
| - | - | - | - | - | - | - | - | - | - | 2,254 | 4,000 |
| 3 / - | - | - | - | - | - | - | - | - | - | 4,146 5,071 | 6,000 |
| - | - | - | - | - | - | - | - | - | - | 18,845 | 14,000 |
| - | - | - | - | - | - | - | - | - | - | 21,382 | 15,000 |
| 3 / - | - | - | - | - | - | - | - | - | - | 31,514 | 18,000 |
| 8 | - | - | - | - | - | - | - | 6 | 12 | 4,226 | 6,000 |
| 8 | - | - | - | - | - | - | - | - | - | 4,226 | 6,000 |
| 8 | - | 4 x 200 ml | - | - | - | 10 | - | 6 | 12 | 24,900 | 16,000 |
| 16 | - | 4 | - | - | - | 12 | - | 8 | - | 24,400 | 15,000 |
| 20 | - | 4 | 4 x 600 ml | - | - | 16 | - | 8 | - | 24,400 | 15,000 |
| 40/28 | 4 | 8 | 4 | - | - | 24 | 4 x 450 ml | 16 | - | 24,400 | 15,000 |
| 8 | - | 4 | - | - | - | - | - | - | - | 3,095 | 4,000 |
| 40/28 | 4 | 8 | 4 | - | - | 24 | 4 x 450 ml | 16 | - | 24,400 | 15,000 |
| 40 | 4 | 6 | 4 | 4 | - | 24 | 4 | 12 | - | 18,038 | 11,500 |
| 48/36 | 6 | 6 | 6 | 6 | 6 | - | 12 | - | - | 6,520 | 6,000 |
| - | - | - | - | - | - | - | - | - | - | 18,516 | 13,000 |
| - | - | - | - | - | - | 2 | - | - | - | 4,593 | 6,300 |
| 16 | on request | | | | | 6 | on request | | | 4,696 | 5,100 |
| 24 | on request | | | | | 12 | on request | | | 6,446 | 6,200 |
| - | - | - | - | - | - | - | - | - | - | 1,438 | 3,500 |

CENTRIFUGE CONFIGURATOR

Scan the QR code or visit our configurator website at: www.mycentrifuge.com



FEATURES OF THE CENTRIFUGES

| | metal housing | plastic housing | metal lid | viewing port in the lid | lid locking and holding | one-hand lid lock | twist lock | powered lid-locking | lid dropping protection | emergency lid lock release | stainless steel chamber | light alloy chamber |
|-------------------------|---|-----------------|-----------|-------------------------|-------------------------|-------------------|------------|---------------------|-------------------------|----------------------------|-------------------------|---------------------|
| EBA 200 I 200 S | | • | • | • | • | • | | | • | • | | • |
| EBA 200 MD | | • | • | • | • | • | | | • | • | | • |
| EBA 270 | | • | • | • | • | • | | | • | • | • | |
| EBA 280 I 280 S | | • | • | • | • | • | | | • | • | • | |
| HAEMATOKRIT 200 | | • | • | • | • | • | | | • | • | | • |
| MIKRO 185 | | • | • | • | • | • | | | • | • | | • |
| MIKRO 200 | • | | • | • | • | • | | • | • | • | • | |
| MIKRO 200 R | • | | • | • | • | • | | • | • | • | • | |
| MIKRO 220 | • | | • | • | • | • | | • | • | • | • | |
| MIKRO 220 R | • | | • | • | • | • | | • | • | • | • | |
| ROTOFIX 32A | • | | • | • | • | • | | | • | • | • | |
| ROTOFIX 32A MD | • | | • | • | • | • | | | • | • | • | |
| UNIVERSAL 320 | • | | • | • | • | • | | • | • | • | • | |
| UNIVERSAL 320 R | • | | • | • | • | • | | • | • | • | • | |
| ROTINA 380 | • | | • | • | • | • | | • | • | • | • | |
| ROTINA 380 R | • | | • | • | • | • | | • | • | • | • | |
| ROTINA 420 | • | | • | • | • | • | | • | • | • | • | |
| ROTINA 420 R | • | | • | • | • | • | | • | • | • | • | |
| ROTANTA 460 I 460 R | • | | • | • | • | • | | • | • | • | • | |
| ROTOFIX 46 | • | | • | • | • | | • | | • | • | • | |
| ROTOFIX 46H | • | | • | • | • | | • | | • | • | • | |
| ROTANTA 460 RC I 460 RF | • | | • | • | • | • | | • | • | • | • | |
| ROTIXA 500 RS | • | | • | • | • | • | | • | • | • | • | |
| ROTO SILENTA 630 RS | • | | • | • | • | • | | • | • | • | • | |
| ROTOLAVIT II | • | | • | • | • | • | | | • | • | | |
| Robotic centrifuges | Details on our models MIKRO 220 Robotic, SBS 300 Robotic, ROTINA 380, 380 R, 380 RC Robotic and ROTANTA 460 Robotic | | | | | | | | | | | |

#) Adjustable temperature range MIKRO 200 R: -10 °C to +40 °C.

| | air cooling | cooling (20 °C to +40 °C) | heating (to +90 °C) | automatic rotor recognition | rapid rotor change system | brushless drive | control panel | error display | imbalance switch-off | data report system (option) | also available in 115 V / 60 Hz | |
|---|-------------|---------------------------|---------------------|-----------------------------|---------------------------|-----------------|---------------|---------------|----------------------|-----------------------------|---------------------------------|-------------------------|
| | • | | | | | • | E plus | • | • | | • | EBA 200 200 S |
| | • | | | | | • | E plus | • | • | | • | EBA 200 MD |
| | • | | | | | • | E | • | • | | • | EBA 270 |
| | • | | | • | • | • | M | • | • | | • | EBA 280 280 S |
| | • | | | | | • | E plus | • | • | | • | HAEMATOKRIT 200 |
| | • | | | | | • | E plus | • | • | | • | MIKRO 185 |
| | • | | | | | • | N plus | • | • | | • | MIKRO 200 |
| | | • #) | | | | • | N plus | • | • | | • | MIKRO 200 R |
| | • | | | • | • | • | N plus | • | • | | • | MIKRO 220 |
| | | • | | • | | • | N plus | • | • | | • | MIKRO 220 R |
| | • | | | • | | • | E | • | • | | • | ROTOFIX 32 A |
| | • | | | • | | • | E | • | • | | • | ROTOFIX 32 A MD |
| | • | | | • | | • | N plus | • | • | | • | UNIVERSAL 320 |
| | | • | | • | | • | N plus | • | • | | • | UNIVERSAL 320 R |
| | • | | | • | | • | C | • | • | | • | ROTINA 380 |
| | | • | | • | | • | C | • | • | | • | ROTINA 380 R |
| | • | | | • | | • | C | • | • | | • | ROTINA 420 |
| | | • | | • | | • | C | • | • | | • | ROTINA 420 R |
| • 460 | • 460 R | | | • | | • | C | • | • | | • | ROTANTA 460 460 R |
| • | | | | • | | • | N plus | • | • | | • | ROTOFIX 46 |
| | | • | | • | | • | N plus | • | • | | • | ROTOFIX 46 H |
| | • | | | • | | • | C | • | • | | • | ROTANTA 460 RC 460 RF |
| | • | | | • | | • | S | • | • | • | | ROTIXA 500 RS |
| | • | | | • | | • | S | • | • | • | | ROTO SILENTA 630 RS |
| • | | | | | | • | Touch | • | • | | • | ROTOLAVIT II |
| are available on our website www.hettichlab.com | | | | | | | | | | | | Robotic centrifuges |

MODEL VARIANTS FOR SPECIAL REQUIREMENTS

The following variants of the refrigerated models **UNIVERSAL 320 R, ROTINA 380 R, ROTINA 420 R, ROTANTA 460 R/RC/RF, ROTIXA 500 RS and ROTO SILENTA 630 RS** are available:

Variants with connection for nitrogen (N₂) flushing:
For centrifugation of reactive substances or substances which are unstable in aerial oxygen. If required, customers should install an oxygen concentration monitor.

Heating/cooling variants (H/C):

For applications demanding temperatures above 40 °C, such as mineral oil testing according to ASTM, material endurance tests, etc.






The floorstanding ROTO SILENTA 630 RS and ROTIXA 500 RS centrifuges are also available as variants with internal cooling unit or for connection to external cooling units, and as GMP versions.






| | Variant | Power supply* | Frequency | Cat. No. |
|---------------------|--|---------------|-----------|----------|
| UNIVERSAL 320 R | N ₂ flushing | 200–240 V | 50 Hz | 1406-20 |
| | | 240 V | 60 Hz | |
| UNIVERSAL 320 R | N ₂ flushing | 115–127 V | 60 Hz | 1406-21 |
| ROTINA 380 R | H/C to +90 °C | 200–240 V | 50–60 Hz | 1706-50 |
| ROTINA 420 R | N ₂ flushing | 200–240 V | 50 Hz | 4706-20 |
| ROTINA 420 R | H/C to +90 °C | 200–240 V | 50 Hz | 4706-50 |
| ROTANTA 460 R | N ₂ flushing | 200–240 V | 50 Hz | 5660-20 |
| ROTANTA 460 R | H/C to +90 °C | 200–240 V | 50 Hz | 5660-50 |
| | | 100–127 V | 60 Hz | |
| ROTANTA 460 R | H/C to +90 °C | 100 V | 50 Hz | 5660-51 |
| ROTANTA 460 R | H/C to +90 °C plus N ₂ flushing | 200–240 V | 50 Hz | 5660-70 |
| ROTANTA 460 RC | H/C to +90 °C | 200–240 V | 50 Hz | 5670-50 |
| ROTANTA 460 RF | H/C to +90 °C | 200–240 V | 50 Hz | 5675-50 |
| ROTIXA 500 RS | H/C to +60 °C | 230–240 V | 50 Hz | 4950-50 |
| ROTIXA 500 RS | GMP, internal cooling unit with water-cooled condenser | 220–240 V | 50–60 Hz | 4950-80 |
| ROTO SILENTA 630 RS | H/C to +90 °C | 400 V 3~ +N | 50–60 Hz | 5005-50 |
| ROTO SILENTA 630 RS | GMP, internal cooling unit with water-cooled condenser | 400 V 3~ +N | 50–60 Hz | 5005-80 |
| ROTO SILENTA 630 RS | GMP, external cooling unit | 400 V 3~ +N | 50–60 Hz | 5005-90 |

*) Other voltages on request.

**) An external refrigerated / heating circulator must be provided by the customer.

AVAILABLE TUBES

| | Capacity in ml | Dimensions Ø x L in mm | Description | Cat. No. |
|---|-------------------|---------------------------|---|---------------------|
|  | 200 | 56 x 112 | bottle, PP, with screw cap | 0555 |
| | 250 | 61 x 122 | | 5127 |
| | 600 | 93 x 134 | | 0551 |
| | 650 | 97 x 139 | | 0554 |
| | 750 | 97 x 152 | | 0512 |
| | 1.000 | 96 x 176 | | 4239 |
|  | 450 | 97 x 110 | bucket, PP | 4447 |
| | 750 | 96 x 135 | | 4234-A |
| | 1,000 | 98 x 138 | bucket, stainless steel, with screw cap | 4255 |
|  | 2,000 | 150 x 100 x 180 WxDxH | bottle, PP, with screw cap | 0550 |
|  | 30 | 44 x 105 | chrome bath tube | 0534 |
| | | - | rubber stopper for 0534 | 0535 |
|  | 100 | 37 x 200 | ASTM tube (petroleum tester), glass, calibrated | 0531 conical |
| | 100 | 58 x 161 | | 0528 pear-shaped |

| | Capacity in ml | Area in mm² / (L x W) in mm | Description | Cat. No. |
|--|-------------------|--------------------------------|---|-------------------|
|  | 0.5 | 28.3 | cyto chambers, disposable | 1531 (50 pcs.) |
| | 0.2 | 28.3 | | 1532 (50 pcs.) |
|  | 0.5 | 28.3 | cyto chambers (re-usable) | 1538 (12 pcs.) |
| | 6 | 13.4 x 22 | | 1532 (12 pcs.) |
|  | 1 | 30 | cyto chambers, single (re-useable) | 1663 |
| | 2 | 60 | | 1664 |
| | 4 | 120 | | 1665 |
| | 8 | 240 | | 1666 |
|  | 3 x 2 | 3 x 60 | cyto chambers, multiple (re-useable) | 1667 |
| | 4 x 1 | 4 x 30 | | 1668 |
|  | 1 | 30 | cyto chambers | 1671 |
| | 2 | 60 | | 1672 |
| | 4 | 120 | | 1673 |

Please make sure not to exceed the tubes' max. permissible RCF.

The capacity of the vessels is given as the nominal volume according to the manufacturer.

The filling volume can be different.

The chrome bath tubes 0508, 0529 and 0534 may not be centrifuged with the stopper. The stopper only serves to close the tube for agitating or mixing.

CERTIFICATES / REGISTRATIONS

Hettich centrifuges and incubators fulfill all applicable European directives that apply to you. Every work step is subject to strict controls and documentation. The company is ISO 9001, ISO 13485 and ISO 14001 certified. Hettich products are manufactured with care and responsibility, giving them a worldwide reputation for safety and reliability.

PRODUCT REGISTRATIONS



according to regulation (EU) 2017/746

IVDR-conform

IVDR compliant according to Regulation (EU) 2017/746



Medical device

Medical device according to Regulation (EU) 2017/745



General laboratory equipment

General laboratory equipment according to Directive 2014/35/EU for electrical equipment


| | | | |
|-------------------------|----|---|---|
| EBA 200 200 S | • | | |
| EBA 200 (MD) | | • | |
| EBA 270 | • | | |
| EBA 280 280 S | • | | |
| HAEMATOKRIT 200 | •* | | |
| MIKRO 185 | • | | |
| MIKRO 200 200 R | • | | |
| MIKRO 220 220 R | • | | |
| ROTOFIX 32A | • | | |
| ROTOFIX 32A (MD) | | • | |
| UNIVERSAL 320 320 R | • | | |
| ROTINA 380 380 R | • | | |
| ROTINA 420 420 R | • | | |
| ROTANTA 460 460 R | | • | |
| ROTOFIX 46 46 H | | | • |
| ROTANTA 460 RC 460 RF | | • | |
| ROTIXA 500 RS | | • | |
| ROTO SILENTA 630 RS | | • | |
| ROTOLAVIT II | • | | |
| HETTCUBE 60 | | | • |
| HETTCUBE 120 | | | • |
| HETTCUBE 200 200 R | • | | • |
| HETTCUBE 400 400 R | • | | • |
| HETTCUBE 600 600 R | • | | • |

*) IVD-conform according to directive 98/79/EC

CATALOG EXPLANATION

Layout

1. Navigation:
Header + sheet index
2. Rotor
+ Bucket
+ Lid
+ Adapter
+ Vessel
+ Thumbnail
3. All specifications apply to the possible combinations shown
4. A maximum of two rotors is shown per page

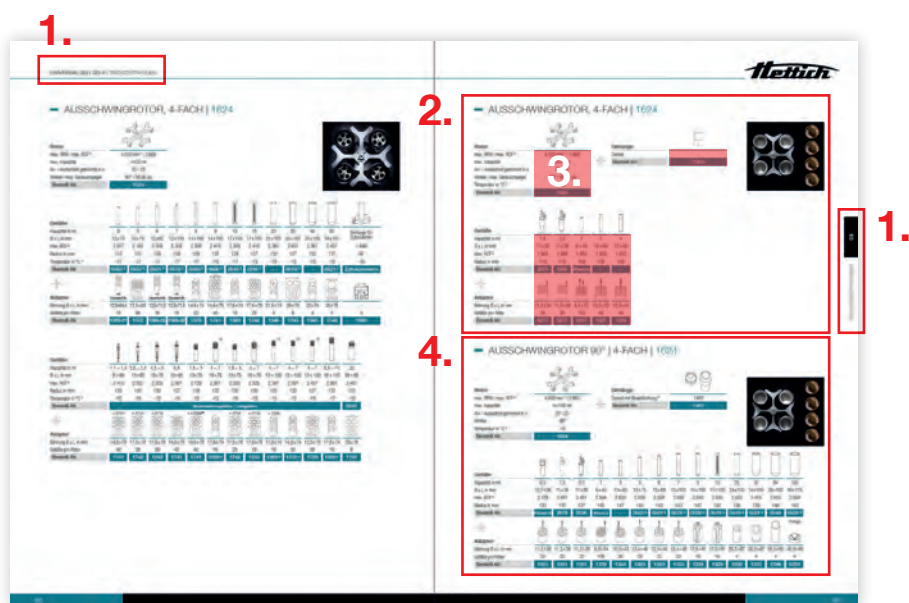

Shortcuts

Vessels:

CP = Culture Plate
DWP = Deep Well Platte
MS = Micronic System
MTP = Microtitre Plate
QP = Filter Plate
PA = Polyamide
PC = Polycarbonate
PE = Polyethylene
PP = Polypropylene

Device name:

C = C after the model name stands for underbench centrifuge
F = F after the model name stands for floorstanding centrifuge
H = H after the model name stands for heated centrifuge
R = R after the model name stands for refrigerated centrifuge
S = S after the model name stands for S control panel in the centrifuge.
(Except EBA 200 S, EBA 280 S).



Angle rotor | Angle rotors are ideally suited for use at high speeds. Time can be saved by tilting the tubes and accelerating the separation.

Calculation of centrifugal force | $RCF = (n/1000)^2 \times r \times 1,118$ | n = Rotation in min^{-1} (RPM) | r = Radius in mm

Capacity of the centrifuge | An overview of all capacities can be found [on page 204](#).

Control panel | Find an overview of all control panels [on page 202](#).



Disk Rotor | This type of angle rotor was specially developed for the centrifugation of capillaries. Significant results are generated in the 90° angle and can be displayed directly in the rotor. With the help of an evaluation cover the results can be read easily and safely.

Download Center | The Download Center on our website allows you to access the most up to date documents including catalogs, brochures, data sheets and certificates. Please visit: www.hettichlab.com/downloadcenter



Drum rotor | A extended form of the angle rotor is the drum rotor. With high rotational speed and high capacity, it is the ideal choice to create sediment at the bottom of the vessel.

Environment | As an ISO 14001 certified company, sustainability and the protection of the environment are a foundation of our principles. Find out more on our website: www.hettichlab.com

Footnotes | All footnotes in the catalog can be found on the last page. The fold-out page allows you to always see the appropriate footnote.

Hettich Packages | No more searching for the right combination of accessories. Our packages include centrifuge, rotor, buckets and adapters – suitable for your specific application.

Model variants | Many of our devices have two different model variants, e.g. cooled and uncooled. In order to be able to distinguish between these two, we use a vertical hyphen (Model x | Model y)
For special requirements you can find further versions of our centrifuges [on page 208](#).

Product overview | Find a quick product overview [on page 6-7](#).

RCF | The relative centrifugal force RCF (or often called g-value) is a characteristic value for centrifugation.

Registrations | Find a detailed overview of all registrations of our products [on page 210](#).

RPM | Is the measurement unit for the speed. It indicates the number of rotations of the rotor in a period of one minute.



Swing-out rotor | During centrifugation, the tubes are spin at a 90° horizontal angle. In the process, the sediment is deposited at the bottom of the tube, separations are formed horizontally. If higher capacities are required in the mid speed range, swing-out rotors are used. The wide variety of accessories is an additional feature of these rotors.

Symbol



Reaction tubes
up to 5 ml



Blood collection
tubes, urine tubes



Plates, filter plates



Special tubes



PCR strips



Tubes with
screw cap



Racks



Hematocrit capillaries



Tubes



Bottles



Blood bags



Cyto accessories

IMPRINT

Hettich 03.23 | We reserve the right to make technical changes to our products as well as printing errors and colour deviations in our printed matters we reserve ourselves.

Conception: dn.p Marketing + Werbeagentur GmbH, Wittingen | Photography: Jürgen Weisheitinger, Lörrach / Tom Pingel, Hamburg u. Stuttgart | Illustrations: Grafikbüro Christian Islinger, Regensburg | Printing: Typodruck GmbH & Co. KG, Rudolf-Diesel-Straße 9, 78532 Tuttlingen.